


## Features

- ▶ For use in low voltage, high frequency inverters
- ▶ Free wheeling, and polarity protection applications

## Mechanical data

- ▶ **Case:** JEDEC SOD-123 molded plastic body
- ▶ **Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026
- ▶ **Polarity:** Color band denotes cathode end
- ▶ **Mounting Position:** Any
- ▶ **Marking:** SD

## Package outline




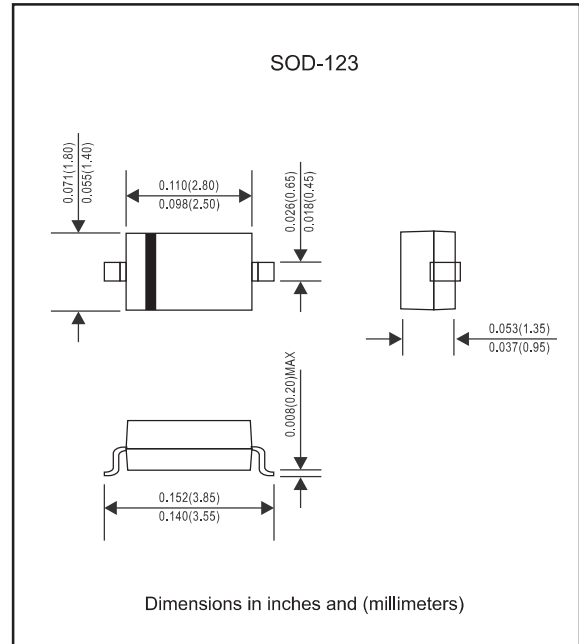


## Maximum ratings and Electrical Characteristics (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOLS	MBR0520L			UNITS
Peak repetitive peak reverse voltage	$V_{RRM}$	20			V
Working peak	$V_{RWM}$				V
DC Blocking voltage	$V_R$				V
RMS Reverse voltage	$V_{R(RMS)}$	14			V
Average rectified output current	$I_o$	0.5			A
Peak forward surge current @=8.3ms	$I_{FSM}$	5.5			A
Power dissipation	$P_d$	500			mW
Thermal resistance junction to ambient	$R_{\theta JA}$	200			K/W
Operating junction temperature range	$T_J$	-55 to +125			$^\circ\text{C}$
Storage temperature	$T_{STG}$	-55 to +150			
Non-Repetitive peak reverse voltage	$V_{RM}$	20	30	40	V

PARAMETER	SYMBOLS	Min.	Max.	Unit	Test conditions
Reverse breakdown voltage	$V_{(BR)}$	20		V	$I_R=250\mu\text{A}$
Reverse voltage leakage current	$I_R$		75	$\mu\text{A}$	$V_R=10\text{V}$
			250	$\mu\text{A}$	$V_R=20\text{V}$
Forward voltage	$V_F$		0.33	V	$I_F=0.1\text{A}$
			0.385	V	$I_F=0.5\text{A}$
Diode capacitance	$C_D$		170	pF	$V_R=0\text{V}, f=1.0\text{MHz}$


## Rating and characteristic curves

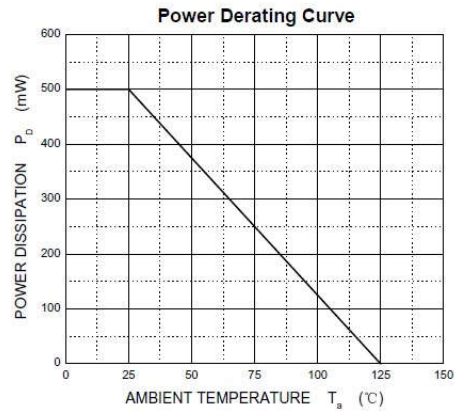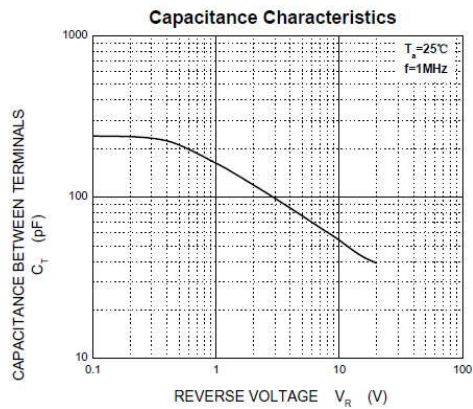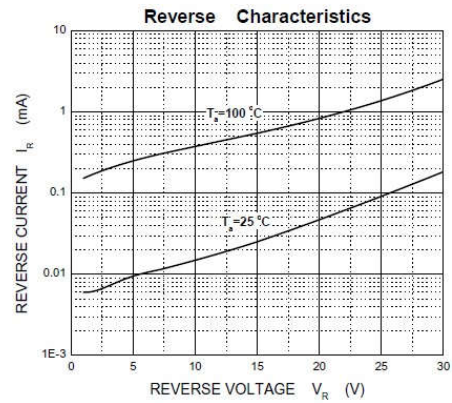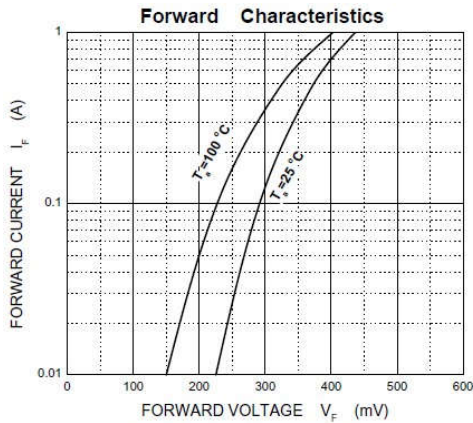

## Pinning information

Pin	Simplified outline	Symbol
Pin1 cathode Pin2 anode		

## Suggested solder pad layout

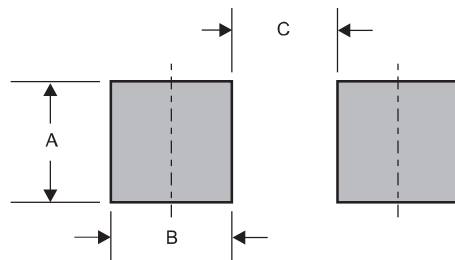

Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SOD-123	0.048 (1.22)	0.036 (0.91)	0.093 (2.36)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [FUXINSEMI](#) manufacturer:*

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAT 54-02LRH E6327](#)  
[NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SK310-T](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [GA01SHT18](#)  
[CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRA140TRPBF](#) [MBRB30H30CT-1G](#) [BAT 15-04R E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#)  
[SB007-03C-TB-E](#) [SK33B-TP](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#)  
[ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [CDBQC0240LR-HF](#) [ACDBA260LR-HF](#)  
[ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#) [1N5819T-G](#)  
[B0530WSQ-7-F](#) [PDS1040Q-13](#) [B160BQ-13-F](#) [SDM05U20CSP-7](#) [B140S1F-7](#)