


# APH-03I-10-I3-S


## Peltier cooler module

### Data sheet

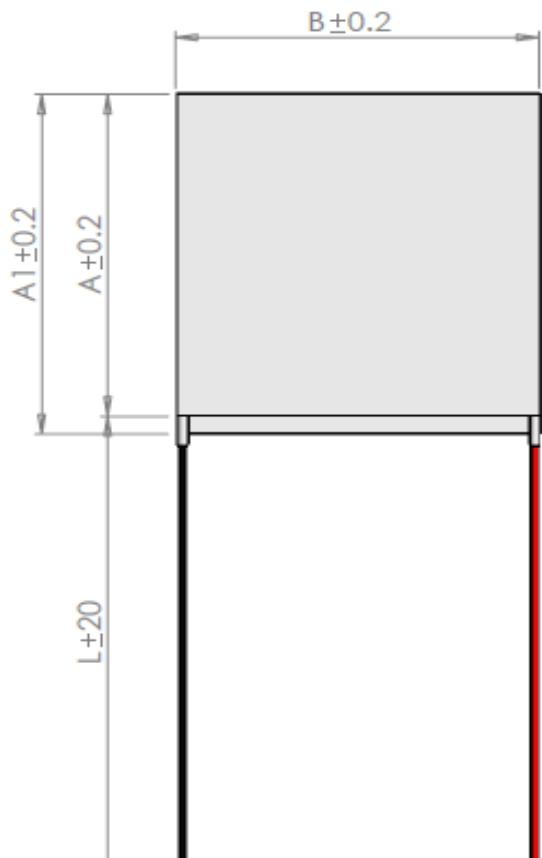

- Input (Black)

+ Input (Red)

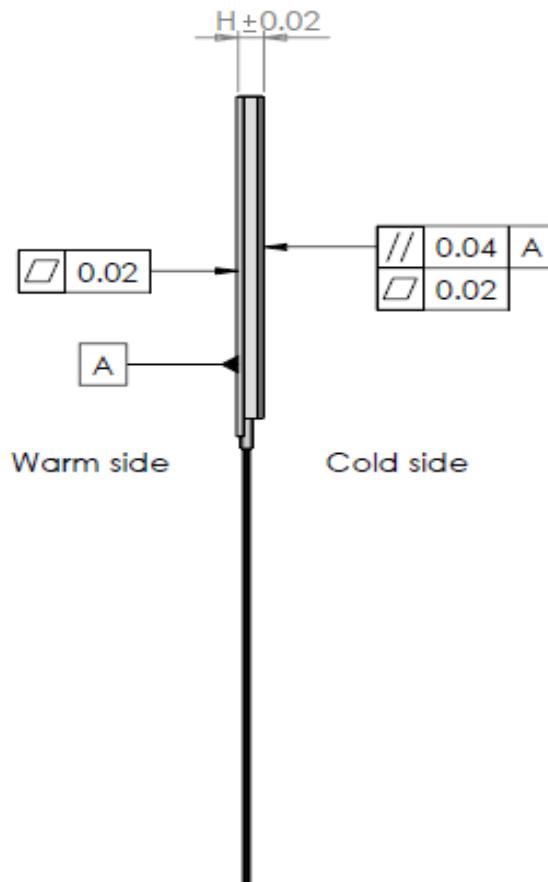

I <sub>max</sub>	[A]	3.8
V <sub>max</sub>	[Vdc]	3.78
P <sub>c</sub> max	[W]	8
ΔT <sub>max</sub>	[°C]	67
A	[mm]	15
A <sub>l</sub>	[mm]	15
B	[mm]	15
H	[mm]	3.3
L	[mm]	100
Wire	AWG	n/a

(At hot side temperature  $Th = 25^\circ\text{C} / 298\text{K}$ , under dry  $\text{N}_2$ ).

$P_c$  max = Cooling power at  $\Delta T = 0$  and  $I = I_{max}$ .

$\Delta T_{max}$  = Temperature difference at  $I = I_{max}$  and  $P_c = 0$ .

Max hot side temperature  $Th = 80^\circ\text{C}$  for best long term performance.

Max mounting pressure: 1.5MPa.


Wires: UL-style 1569, 105oC (Unstripped).



# APH-03I-10-I3-S

## Peltier cooler module


### Data sheet - At hot side temperature 25°C

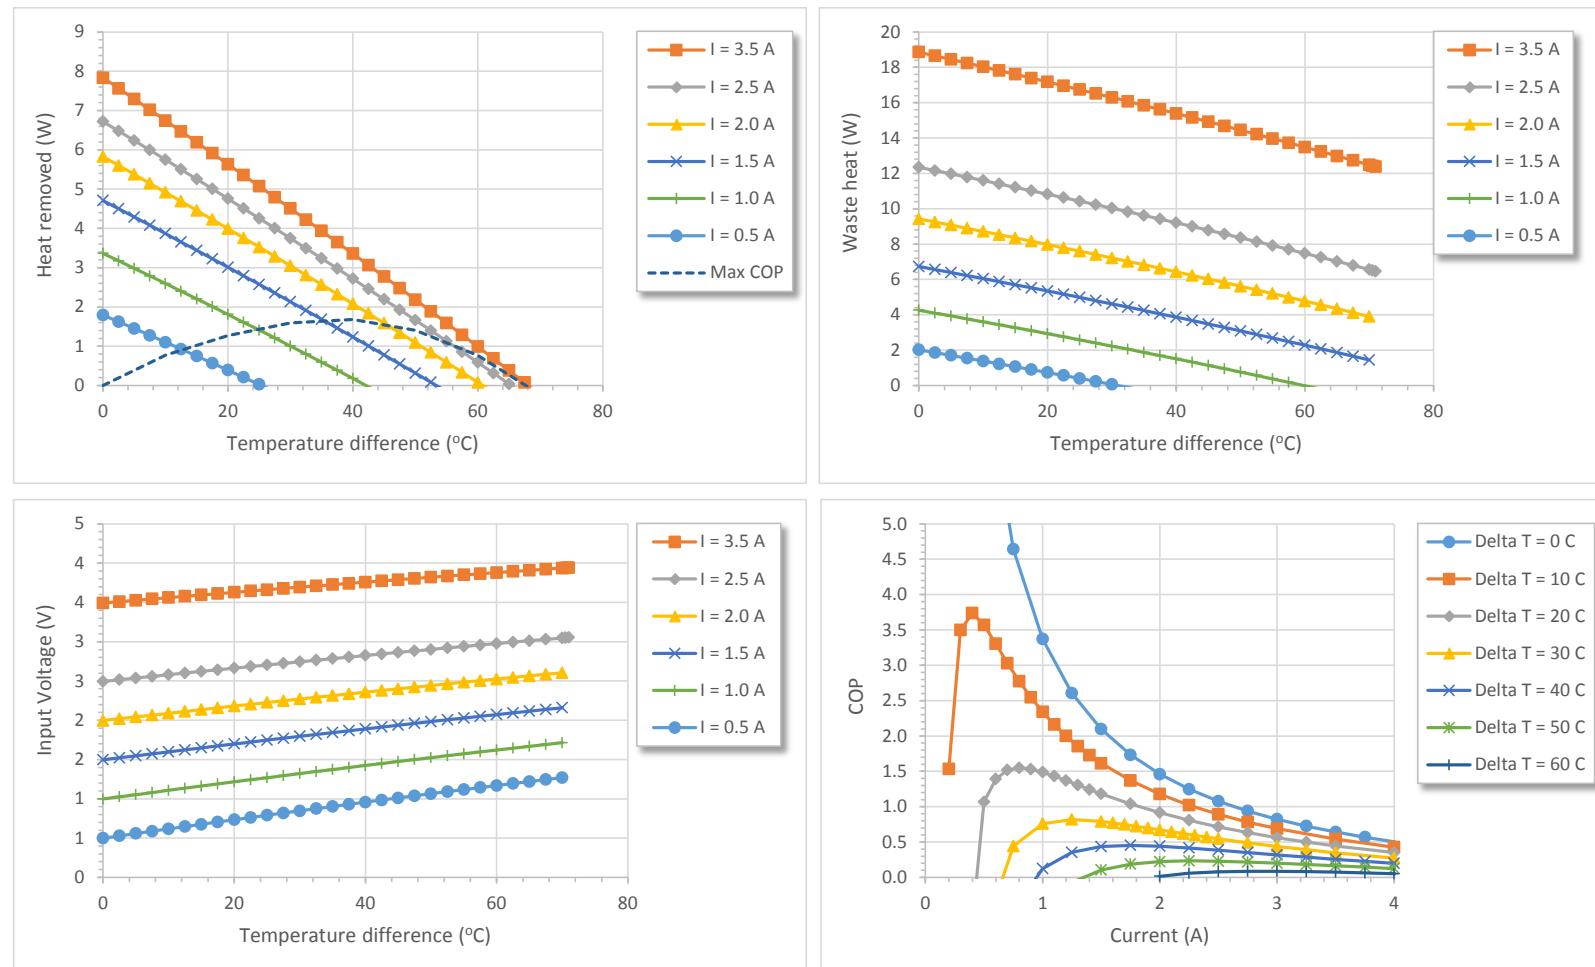

# APH-03 I-10-I3-S

## Peltier cooler module


### Data sheet - At hot side temperature 50°C

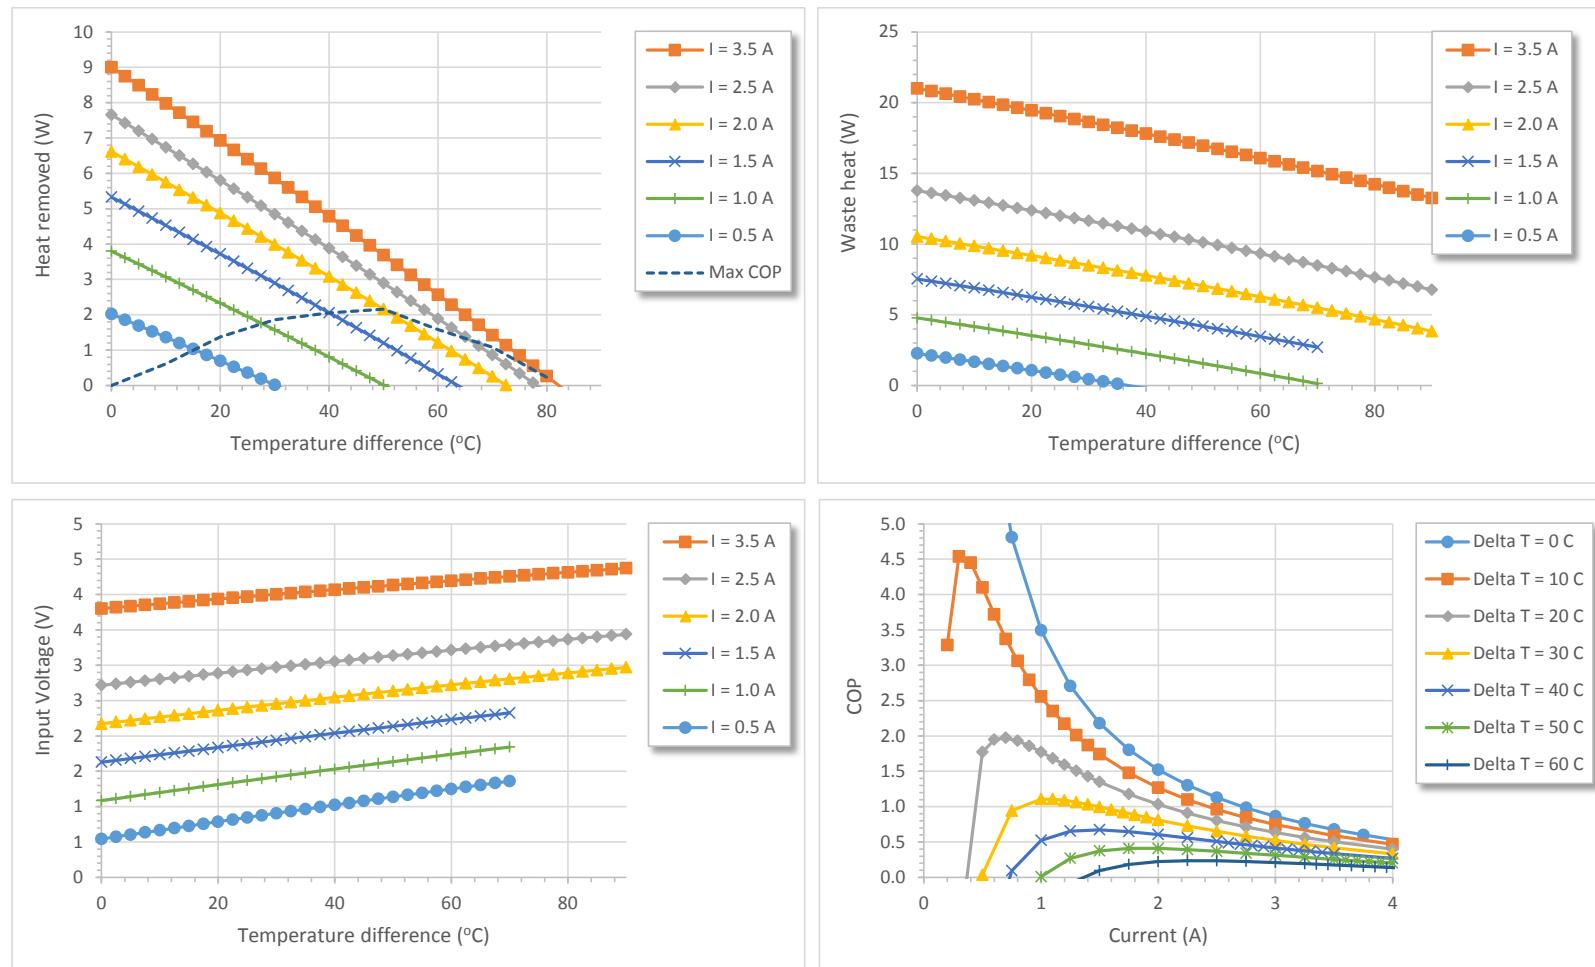

# APH-03 I-10-13-S

## Peltier cooler module

### Data sheet - At hot side temperature 75°C

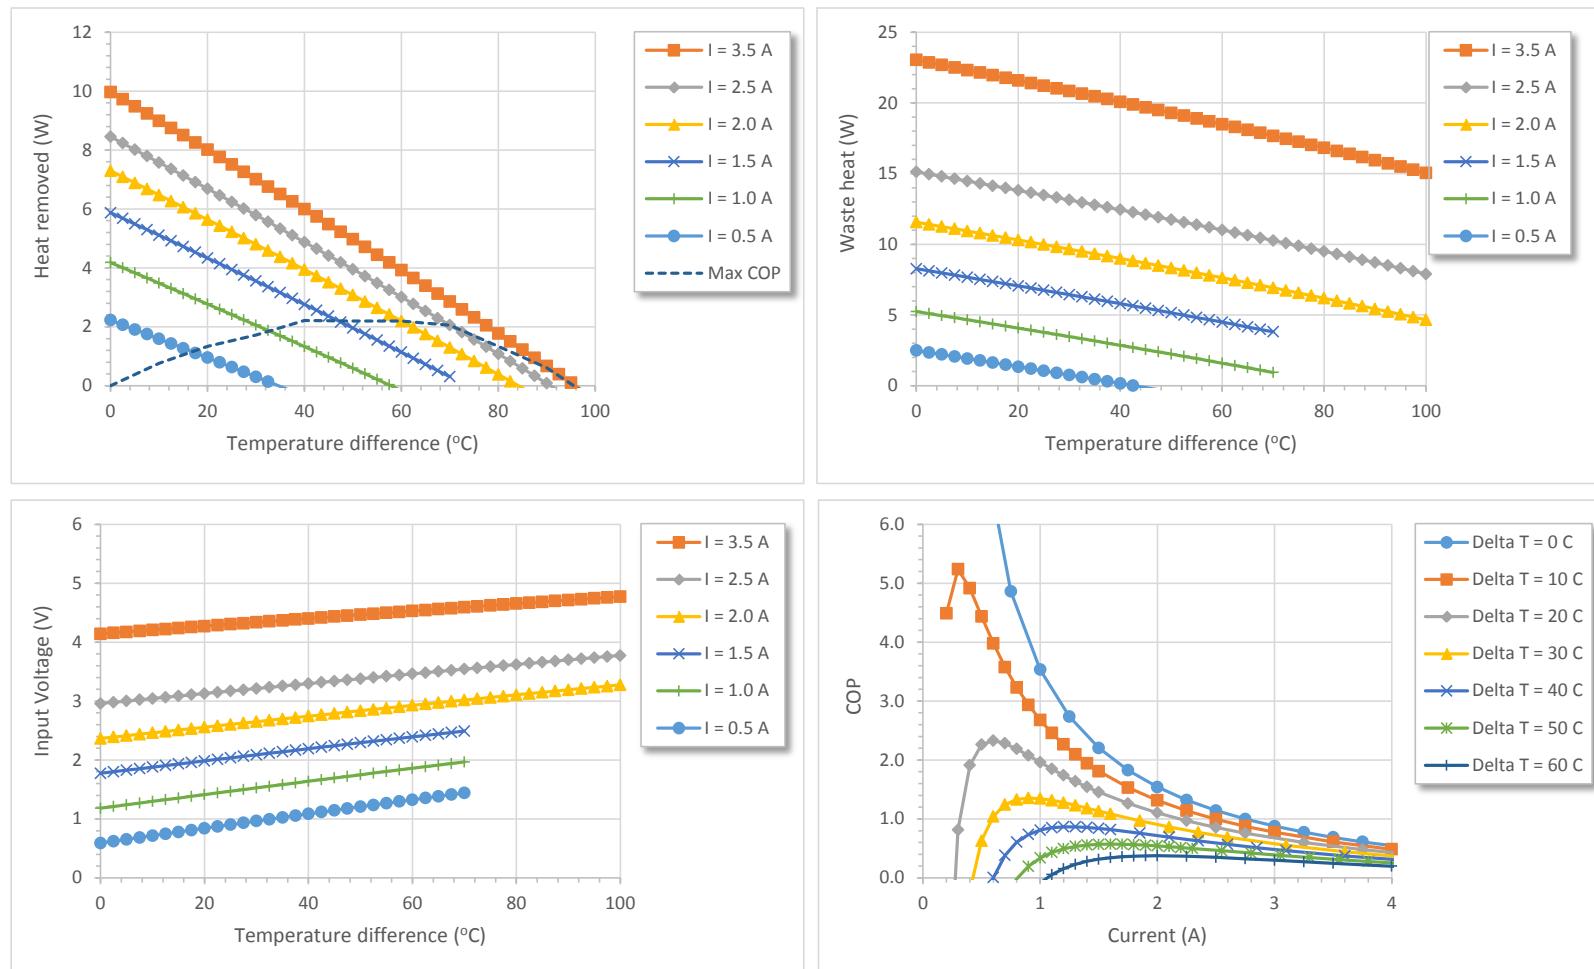

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for european thermodynamics manufacturer:***

Other Similar products are found below :

[AP3-070-20-25](#) [APHC-12706-S](#) [SF-06-150-S](#) [APH-031-10-13-S](#)