


Part Number: 1921X3ZX

Type	Size	Rating	Description
LED	M14	24VAC/DC	Standard Bezel Panel Indicator

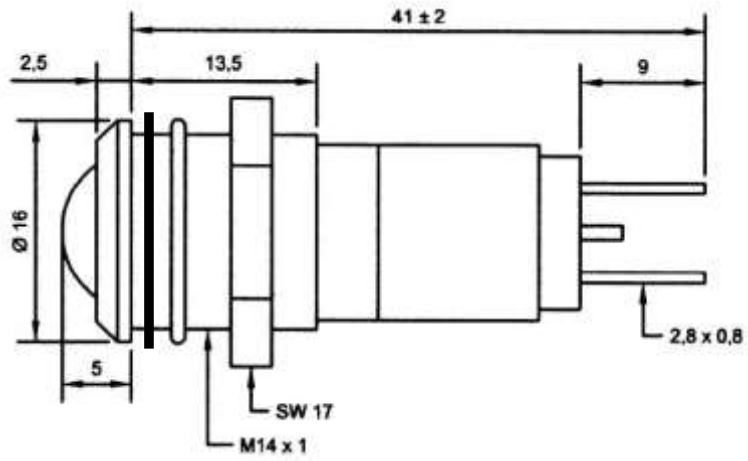

Part #	Colour	Voltage(V)	DC Current(mA)	Intensity(mcd)
1921X3Z1	Green	24VAC/DC	20	60
1921X3Z3	Red	24VAC/DC	20	100
1921X3ZW	White	24VAC/DC	7	500

Notes:

- 1 X = Chrome Bezel finish. 0 = Satin, 1 = Black, 2 = Matt
- 2 Electrical & optical data are measured at an ambient temperature of 25°C
- 3 Luminous intensity at DC
- 4 Storage temperature -25 °C to +80°C
- 5 Application temperature -20 °C to +60°C
- 6 Voltage tolerance ±10%
- 7 Due to component tolerances, colour temperature variations may be observed
- 8 The terminals are not qualified for soldering
- 9 Degree of protection IP67 when used with the supplied gasket
- 10 The plastic(polycarbonate) has limited chemical resistance
- 11 RoHS & REACH SVHC compliant

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [cml manufacturer](#):

Other Similar products are found below :

[1860623W3A](#) [19010351](#) [19300133](#) [192A0255](#) [19211252](#) [19050253](#) [19241354](#) [195A1350](#) [SK-3-2500](#) [6346002505R](#) [6275AL](#) [19041051](#)
[19010053](#) [19180351](#) [1862623W3A](#) [19272351](#) [19040351](#) [19051357](#) [19050357](#) [19010350](#) [19000352](#) [T000205](#) [1860325W3D](#) [19000353](#) [SK-](#)
[2-2500](#) [19410132M](#) [19050257](#) [192A1355](#) [7632](#) [18600M51](#) [19210363](#) [19272350](#) [1512145UR3](#) [T000015](#) [1927235WA](#) [190403Z2](#) [19211253](#)
[19740135](#) [192D0000](#) [192D0230](#) [W643](#) [19272352](#) [190A2351](#) [18606232](#) [19TR0I24](#) [1512135UG3](#) [T010309](#) [19031253](#) [1511A45W3D](#)
[1505475W3D](#)