




### FEATURES



- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automatic Insertion
- For General Purpose Switching Applications
- High Conductance


### VOLTAGE RANGE

120 - 250Volts

### CURRENT

0.25 Ampere

SOD123

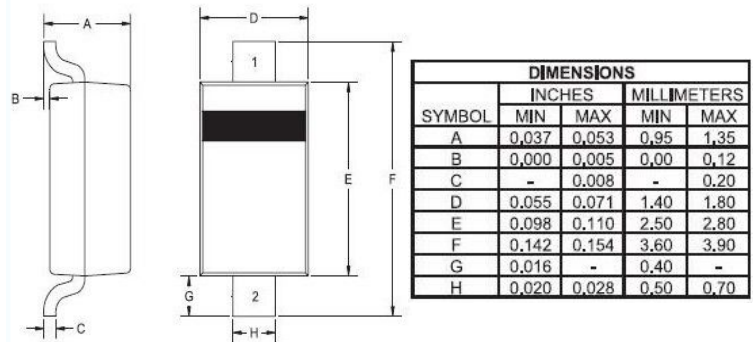

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
 Single phase half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

TYPE NUMBER	BAV19W	BAV20W	BAV21W	UNITS
Maximum Recurrent Peak Reverse Voltage	120	200	250	V
Maximum RMS Voltage	100	150	200	V
Maximum DC Blocking Voltage	120	200	250	V
Maximum Average Forward Rectified Current		0.25		A
See Fig. 1				
Peak Forward Surge Current @ at 1s		1.0		A
@ at 1ms		3.0		A
@ at 1 us		9.0		A
Maximum Instantaneous Forward Voltage at 0.2A		1.25		V
Maximum DC Reverse Current at Rated DC Blocking Voltage Ta=25°C		0.1		µA
Typical Junction Capacitance		5		pF
Total Power Dissipation		500		mW
Maximum Reverse Recovery Time		50		ns
Operating Temperature Range Tj		-55 to +150		°C
Storage Temperature Range Tstg		-55 to +150		°C

RATING AND CHARACTERISTIC CURVES BAV19W / BAV20W / BAV21W

Fig.1 Forward Current Derating Curve

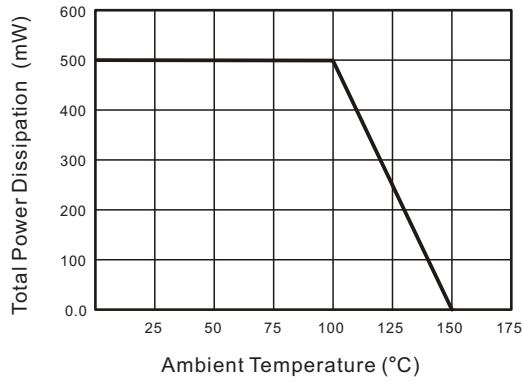


Fig.2 Typical Reverse Characteristics

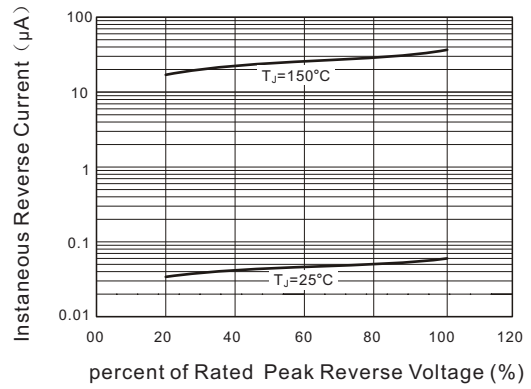


Fig.3 Typical Instantaneous Forward Characteristics


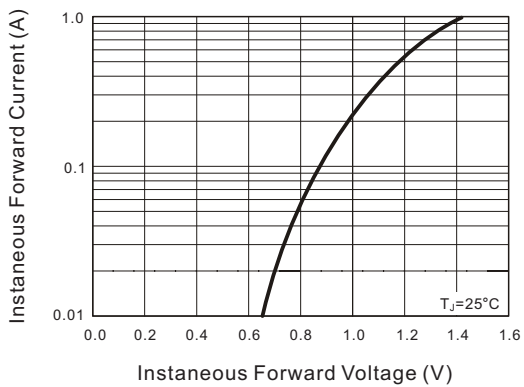


Fig.4 Typical Junction Capacitance

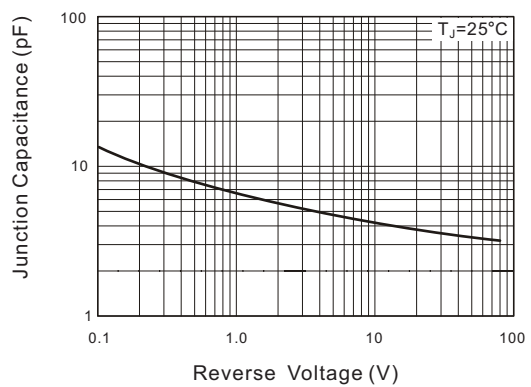

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Diodes - General Purpose, Power, Switching category:](#)

*Click to view products by* [GOODWORK manufacturer:](#)

Other Similar products are found below :

[MMBD3004S-13-F](#) [RD0306T-H](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#) [1SS400CST2RA](#)  
[SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#) [1SS226-TP](#) [RFUH20TB3S](#)  
[D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [LL4151-GS18](#) [053684A](#)  
[SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV199E6433HTMA1](#) [BAS28-7](#)  
[BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [RGP30D-E3/73](#) [BAV99TQ-13-F](#) [BAS21DWA-7](#)  
[BAV99HDW-13](#) [NTE6250](#) [NTE582-4](#) [NTE582-6](#) [MMDB30-E28X](#)