


### Features


for switching and amplifier applications



SOT-323

1. BASE
2. EMITTER
3. COLLECTOR

### SOT-323

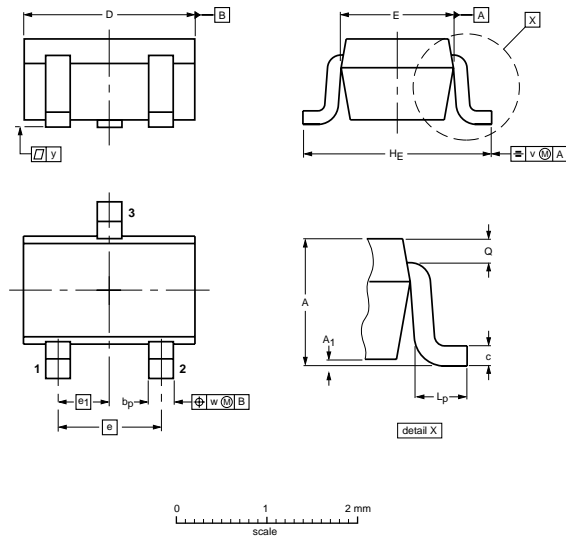

DIMENSIONS (mm are the original dimensions)

UNIT	A	A <sub>1</sub> max	b <sub>p</sub>	c	D	E	e	e <sub>1</sub>	H <sub>E</sub>	L <sub>p</sub>	Q	v	w
mm	1.1 0.8	0.1	0.4 0.3	0.25 0.10	2.2 1.8	1.35 1.15	1.3	0.65	2.2 2.0	0.45 0.15	0.23 0.13	0.2	0.2

### Absolute Maximum Ratings (T<sub>a</sub> = 25 °C)

Parameter	Symbol	Value	Unit
Collector Base Voltage	-V <sub>CBO</sub>	40	V
Collector Emitter Voltage	-V <sub>CEO</sub>	40	V
Emitter Base Voltage	-V <sub>EBO</sub>	5	V
Collector Current	-I <sub>C</sub>	200	mA
Total Power Dissipation	P <sub>tot</sub>	200	mW
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature Range	T <sub>stg</sub>	- 55 to +150	°C

# MMBT3906W

## Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
DC Current Gain at $-V_{CE} = 1\text{ V}$ , $-I_C = 1\text{ mA}$ at $-V_{CE} = 1\text{ V}$ , $-I_C = 10\text{ mA}$ at $-V_{CE} = 1\text{ V}$ , $-I_C = 50\text{ mA}$ at $-V_{CE} = 1\text{ V}$ , $-I_C = 100\text{ mA}$	$h_{FE}$	80 100 60 30	- 300 - -	- - - -
Collector Emitter Cutoff Current at $-V_{CE} = 30\text{ V}$	$-I_{CES}$	-	50	nA
Emitter Base Cutoff Current at $-V_{EB} = 3\text{ V}$	$-I_{EBO}$	-	50	nA
Collector Base Breakdown Voltage at $-I_C = 10\text{ }\mu\text{A}$	$-V_{(BR)CBO}$	40	-	V
Collector Emitter Breakdown Voltage at $-I_C = 1\text{ mA}$	$-V_{(BR)CEO}$	40	-	V
Emitter Base Breakdown Voltage at $-I_E = 10\text{ }\mu\text{A}$	$-V_{(BR)EBO}$	5	-	V
Collector Emitter Saturation Voltage at $-I_C = 10\text{ mA}$ , $-I_B = 1\text{ mA}$ at $-I_C = 50\text{ mA}$ , $-I_B = 5\text{ mA}$	$-V_{CE(sat)}$	- -	0.25 0.4	V
Base Emitter Saturation Voltage at $-I_C = 10\text{ mA}$ , $-I_B = 1\text{ mA}$ at $-I_C = 50\text{ mA}$ , $-I_B = 5\text{ mA}$	$-V_{BE(sat)}$	0.65 -	0.85 0.95	V
Transition Frequency at $-V_{CE} = 20\text{ V}$ , $I_E = 10\text{ mA}$ , $f = 100\text{ MHz}$	$f_T$	250	-	MHz
Collector Output Capacitance at $-V_{CB} = 10\text{ V}$ , $f = 100\text{ KHz}$	$C_{ob}$	-	4.5	pF
Delay Time at $-V_{CC} = 3\text{ V}$ , $-V_{BE(OFF)} = 0.5\text{ V}$ , $-I_C = 10\text{ mA}$ , $-I_{B1} = 1\text{ mA}$	$t_d$	-	35	ns
Rise Time at $-V_{CC} = 3\text{ V}$ , $-V_{BE(OFF)} = 0.5\text{ V}$ , $-I_C = 10\text{ mA}$ , $-I_{B1} = 1\text{ mA}$	$t_r$	-	35	ns
Storage Time at $-V_{CC} = 3\text{ V}$ , $-I_C = 10\text{ mA}$ , $I_{B1} = -I_{B2} = -1\text{ mA}$	$t_{stg}$	-	225	ns
Fall Time at $-V_{CC} = 3\text{ V}$ , $-I_C = 10\text{ mA}$ , $I_{B1} = -I_{B2} = -1\text{ mA}$	$t_f$	-	75	ns

## RATING AND CHARACTERISTIC CURVES (MMBT3906W)

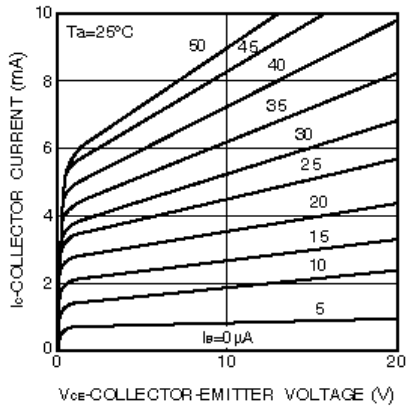


Fig. 1 Grounded emitter output characteristics

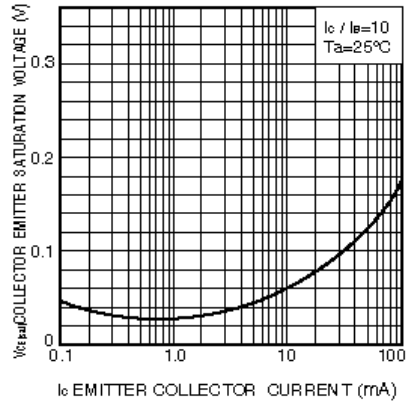


Fig. 2 Collector-emitter saturation voltage vs. collector current

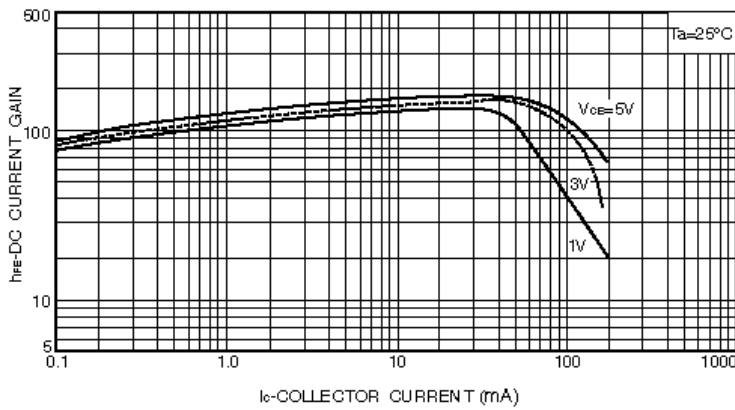


Fig. 3 DC current gain vs. collector current (I)

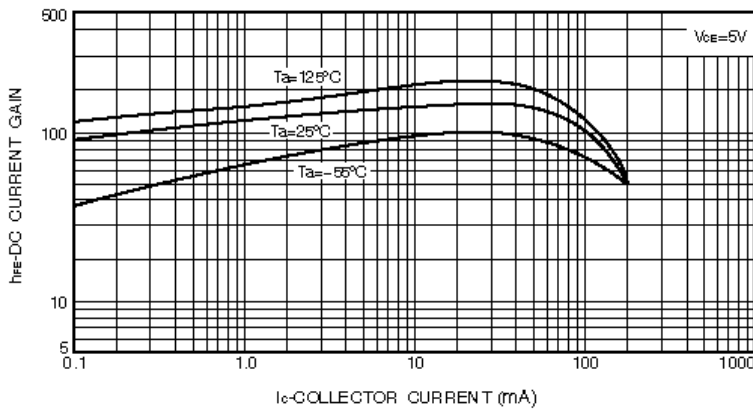


Fig. 4 DC current gain vs. collector current (II)

## RATING AND CHARACTERISTIC CURVES (MMBT3906W)

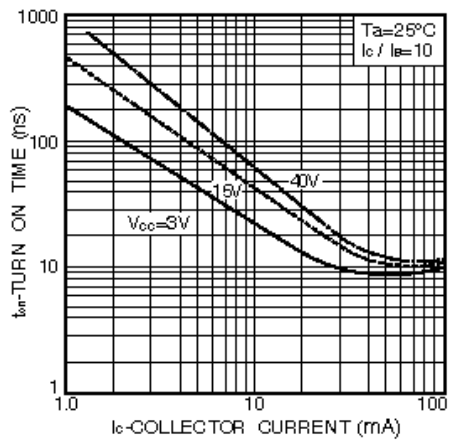


Fig. 8 Turn-on time vs. collector current

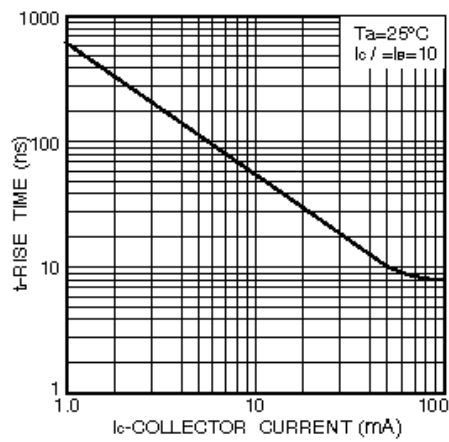


Fig. 9 Rise time vs. collector current

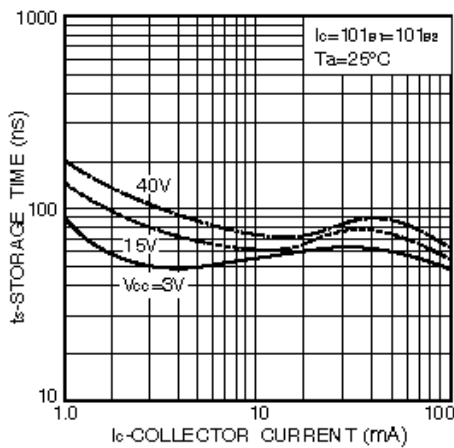


Fig. 10 Storage time vs. collector current

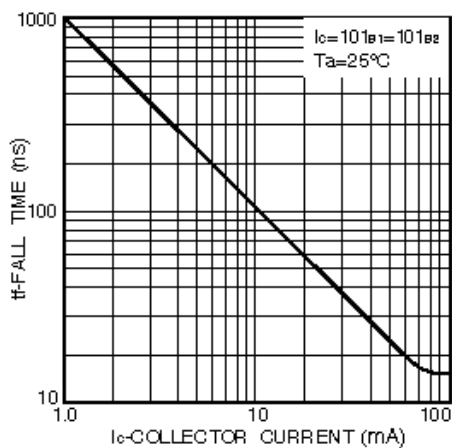


Fig. 11 Fall time vs. collector current

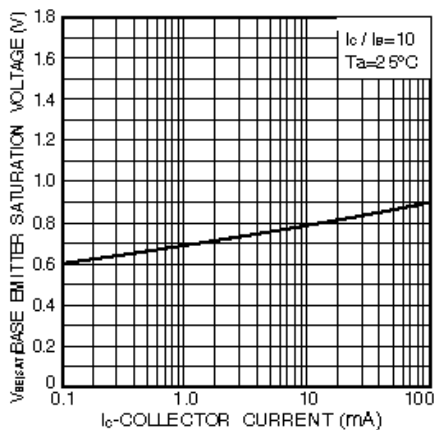


Fig. 6 Base-emitter saturation voltage vs. collector current

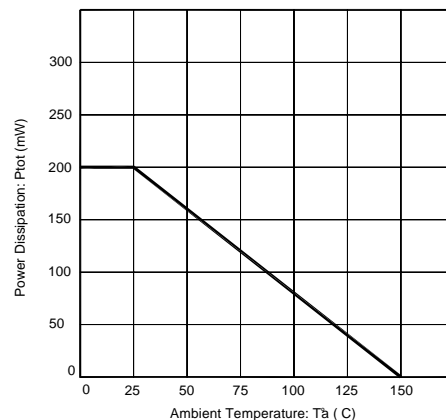


Fig. 10 Power Dissipation vs Ambient Temperature

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [GOODWORK manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [BC856BW-13-F](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#)