

(2.54 mm) .100"

MMSD, MMSDT, MMSS, MMSST SERIES

MINI MATE® CABLE ASSEMBLY

SPECIFICATIONS

For complete specifications see www.samtec.com?MMSD, www.samtec.com?MMSDT, www.samtec.com?MMSS or www.samtec.com?MMSST

Insulator Material:
Nylon 66

Contact Material:
Phosphor Bronze

Plating:

Au or Sn over
50µ" (1.27 µm) Ni

Operating Temp Range:

-10°C to +105°C (PVC)

for 20, 22, 24, 26 AWG

-10°C to +80°C (PVC)

for 28, 30 AWG

-40°C to +125°C (*Teflon®)

Voltage Rating:

300 VAC

Wire:

20 to 30 AWG

RoHS Compliant:

Yes

Mates with:


IPL1

(Does not mate with IPT1)

*DuPont™ Teflon® is a registered trademark of the E.I. du Pont de Nemours and Company or its affiliates.

Note: Teflon® cable is intended for crimp only. Contact Samtec for solderable cable applications.

MMSD/IPL1	
WIRE GAUGE	CURRENT RATING (PER PIN)
20	5.4 A
22	4.3 A
24	3.9 A
26	3.5 A
28	2.6 A
30	2.1 A
1 PIN POWERED	

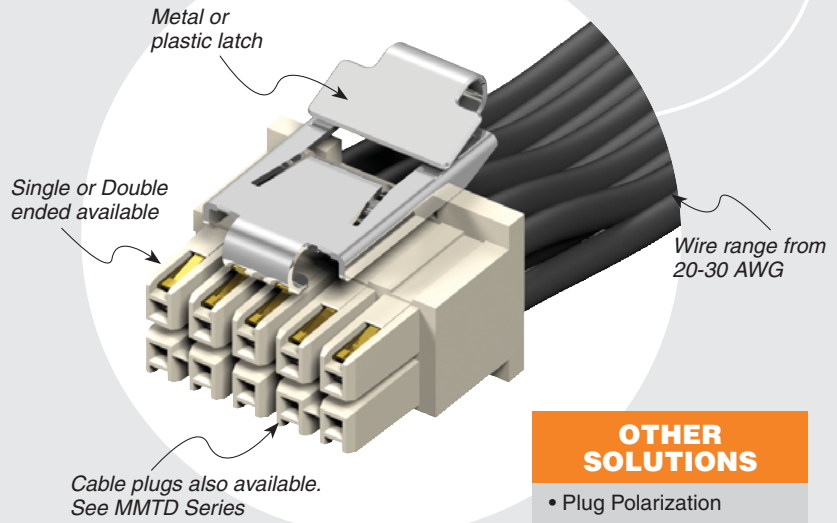

OTHER SOLUTIONS

• Plug Polarization

For specification, see www.samtec.com?PK-79.

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



ALSO AVAILABLE (MOQ Required)

- Other color coded cables (*Teflon® N/A)
 - Other sizes/pin counts.
 - Other Gold platings
 - Guide post
- Contact Samtec.

APPLICATION

-20C, -24C, -28C CABLE COLOR CODING	
PIN	COLOR
1	BROWN
2	RED
3	ORANGE
4	YELLOW
5	GREEN
6	BLUE
7	VIOLET
8	GRAY
9	WHITE
10	BLACK
ETC	REPEAT

Notes:
For wiring option information refer to drawing on web.
Some lengths, styles and options are non-standard, non-returnable.

TYPE	PINS PER ROW	WIRE GAUGE	PLATING OPTION	ASSEMBLY LENGTH	END OPTION	K	LATCH OPTION
MMSD = Double Row PVC Cable	-02, -03, -04, -05, -06, -08,	-20 = Color Coded Cable	-L = 10µ" (0.25 µm) Gold on contact, Tin on tail	- "XX.XX" = Assembly Length in Inches (82.55 mm) 03.25" min.	-S = Single End -D = Double End (Latch Required)	-K = Keyed Polarization	
MMSDT = Double Row *Teflon® Cable (20, 24, 28 & 30 AWG only)	-10, -12, -15, -16, -20, -25 (Standard sizes)	-22 -24 -24C = Color Coded Cable					
MMSS = Single Row PVC Cable		-26 -28 -28C = Color Coded Cable					
MMSST = Single Row *Teflon® Cable (20, 24, 28 & 30 AWG only)		-30					

-M & -MXX (MMSD/MMSDT)

Assembly Length ± (3.18) .125

(Metal latches for more rugged environments; -02, -05 & -10 positions only)

- M = Single Ended, Metal Latches (Leave blank for plastic)
- Double Ended (-D) Crossed requires MMSD/MMSDT
- LUS = Plastic Latch up, straight
- LDS = Plastic Latch down, straight
- LUX = Plastic Latch up, crossed
- LDX = Plastic Latch down, crossed
- MUS = Metal Latch up, straight
- MDS = Metal Latch down, straight
- MUX = Metal Latch up, crossed
- MDX = Metal Latch down, crossed

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[0152660053](#) [603020002](#) [73-7797-25](#) [73-8890-10](#) [73-8890-14](#) [73-8891-14](#) [73-8891-25](#) [73-8892-50](#) [73-8894-10](#) [73-8894-3](#) [73-8895-14](#) [73-8896-7](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [9QA0-111-12-3.00](#) [1200650742](#) [1200700174](#) [1200860368](#) [1200650013](#) [1201080008](#) [1-21919-1](#) [1300500373](#) [1300101844](#) [1300101845](#) [130050-0004](#) [1300500014](#) [1410147](#) [E16A06002M030](#) [E200102-009-S1](#) [MT14-187L](#) [17-103530](#) [NK5EPC18RDY](#) [NK5EPC18VLY](#) [NK5EPC18YLY](#) [NK5EPC1GRY](#) [NK5EPC30BLY](#) [NK5EPC30VLY](#) [NK5EPC30YLY](#) [NK5EPC4Y](#) [NK5EPC6YLY](#) [NK5EPC8BLY](#) [NK5EPC9YLY](#) [NK6PC30BUY](#) [NK6PC30GRY](#) [NK6PC30RDY](#) [NK6PC30Y](#) [NK6PC30YLY](#) [1969343-6](#) [C501100010](#) [C501106002](#)