
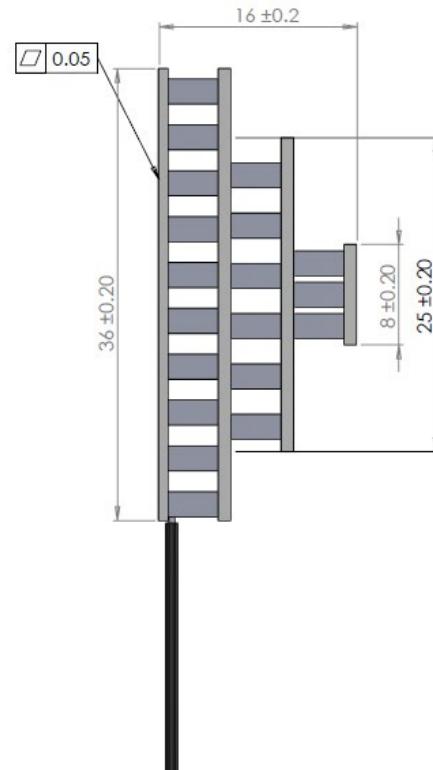


# AP3-070-20-25

## 3-stage, Peltier cooler module

### Data sheet

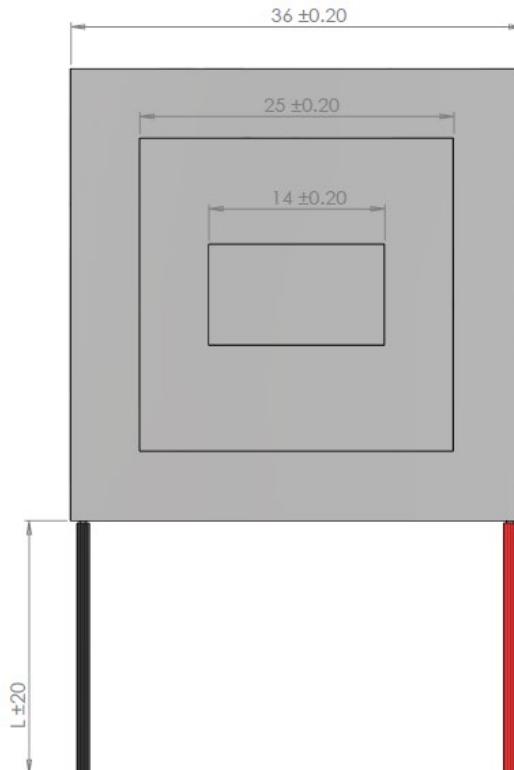

I <sub>max</sub>	[A]	6.5
V <sub>max</sub>	[Vdc]	6.5
0P <sub>c</sub> max	[W]	3
ΔT <sub>max</sub>	[°C]	117
A	[mm]	36
A <sub>1</sub>	[mm]	36
B	[mm]	8
B <sub>1</sub>	[mm]	14
H	[mm]	16
L	[mm]	100





- (At hot side temperature Th = 25°C / 298K, under dry N<sub>2</sub>)
- P<sub>c</sub> max = Cooling power at ΔT = 0 and I = I<sub>max</sub>
- ΔT<sub>max</sub> = Temperature difference at I = I<sub>max</sub> and P<sub>c</sub> = 0
- Max hot side temperature Th = 90°C for best long term performance
- Max mounting pressure: 1.5MPa
- Wires: UL-style 1569, 105°C (Unstripped)
- Silicone sealed



# AP3-070-20-25

## 3 stage, Peltier cooler module

### Data sheet - At hot side temperature 27°C

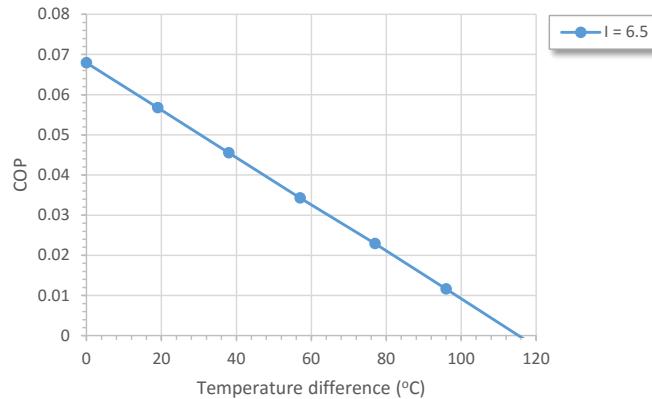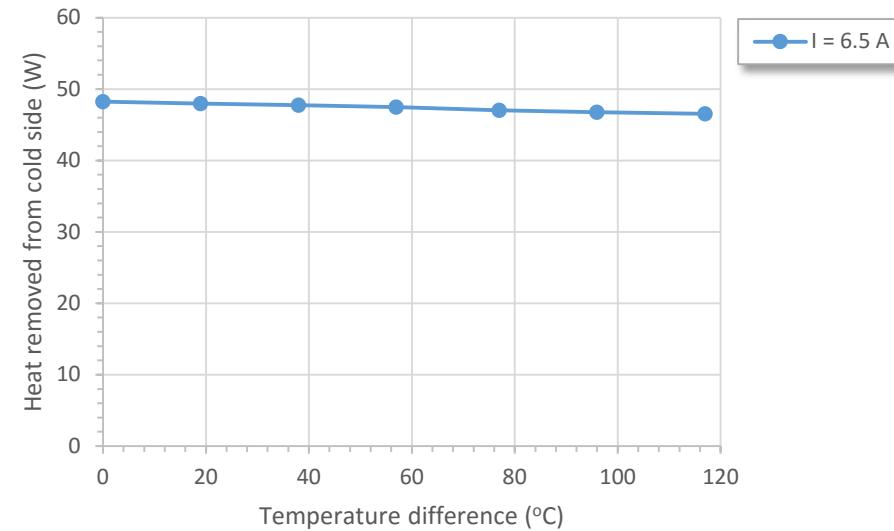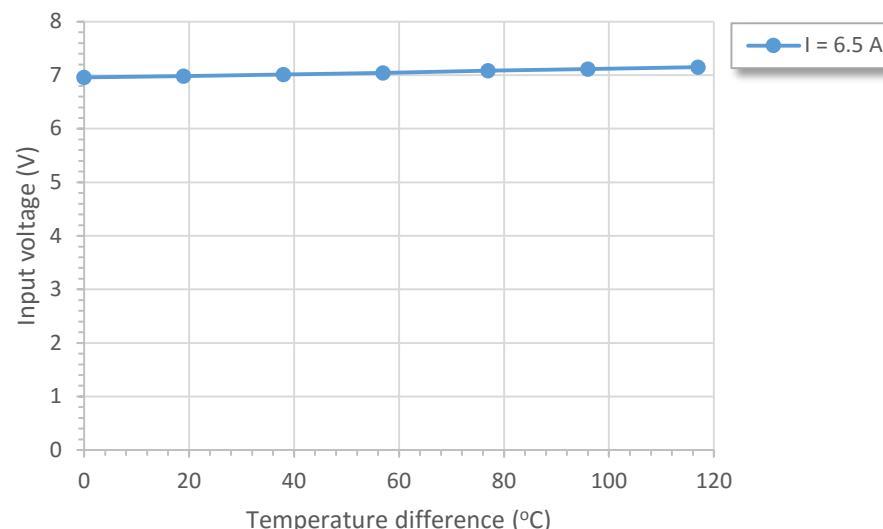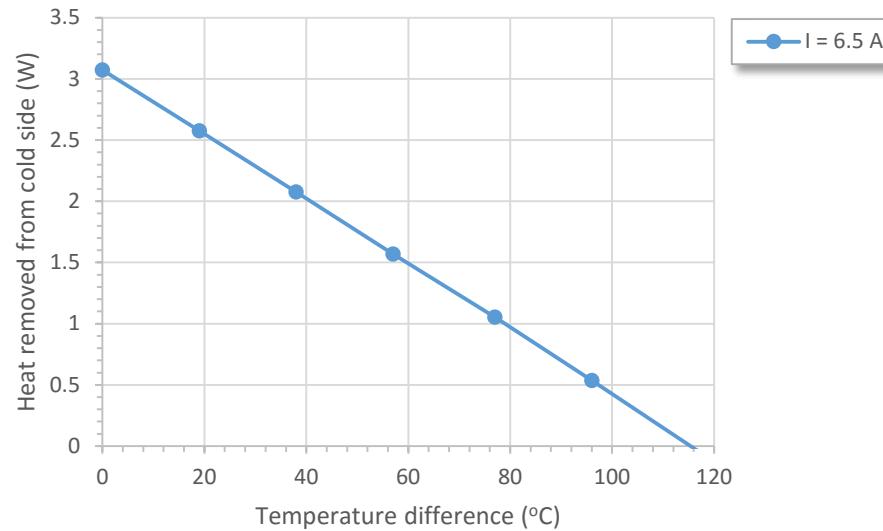

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for european thermodynamics manufacturer:***

Other Similar products are found below :

[AP3-070-20-25](#) [APHC-12706-S](#) [SF-06-150-S](#) [APH-031-10-13-S](#)