


ES2000

Flame-Retardant, High-Shrink-Ratio, Adhesive-Lined Semirigid Polyolefin Tubing

Product Facts

- 4:1 shrink ratio allows a few sizes to cover a wide range of splice and component diameters
- Flame-retardant and mechanically tough, the tubing provides strain relief and abrasion protection of wire splices, terminals, and other components
- Thick adhesive liner forms an effective barrier against fluids and moisture and performs well at an extended temperature range
- UL recognized
- RoHS compliant

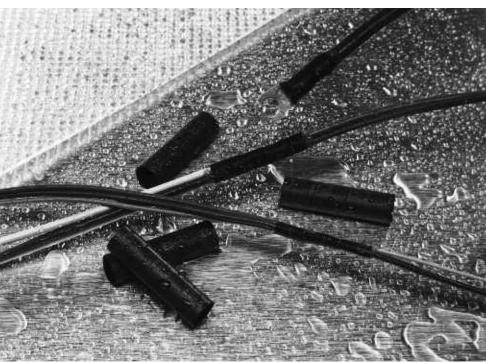

Applications

Specially designed for environmental sealing and electrical insulation of wire splices, terminations, and components.

Installation

Minimum shrink temperature: 110°C [230°F] Minimum full recovery temperature: 135°C [275°F]

Operating Temperature Range

-40°C to 130°C [-40°F to 266°F]

275°F]		

Heat-shrinkable Tubing

Specifications/Approvals

Series	UL* %	Raychem
ES2000	E85381 600 V, 125°C	RT-1112





ES2000 (Continued)

Product Dimensions

	Inside Diameter (Including Core)		Recovered Wall Thickness*		
Part Number	Minimum Expanded as Supplied	Maximum Recovered After Heating	Minimum Total Wall After Heating	Minimum Jacket Wall After Heating	Minimum Adhesive Wall After Heating
ES2000-No.1	5.72 [0.225]	1.27 [0.050]	1.20 [0.047]	0.64 [0.025]	0.56 [0.022]
ES2000-No.2	7.44 [0.293]	1.65 [0.065]	1.52 [0.060]	0.76 [0.030]	0.76 [0.030]
ES2000-No.3	10.85 [0.427]	2.41 [0.095]	1.91 [0.075]	0.89 [0.035]	1.02 [0.040]
ES2000-No.4	17.78 [0.700]	4.45 [0.175]	2.41 [0.095]	1.04 [0.041]	1.37 [0.054]

*Wall thickness will be less if tubing recovery is restricted during shrinkage.

Ordering Information

Color	Standard	Black (-0)
Size selection	Always order the largest size that will shrink snugly over the component to be covered.	
Standard packaging	Cut pieces.	
Marking	Tubing will be printed with its numbered size (such as ES-1, ES-2, ES-3, or ES-4).	
Ordering description	dering description Specify product name, numbered size, color, and cut length (for example, ES2000-NO. 2-B9-0-50MM).	

1-28

9-1773447-9 CIS WR 08/2011

te.com

Dimensions are in inches and millimeters unless otherwise specified. Values in brackets are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change. USA: 1-800-522-6752 Canada: 1-905-475-6222 Mexico: 52-55-1106-0800 L. & S. America: 54-11-4733-2200 Germany: 49-6251-133-1999 China: 86-400-820-6015 Japan: 81-44-844-8013 UK: 44-800-267-666

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Heat Shrink Tubing and Sleeves category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

 770-006S102
 5685710001
 CR8248-000
 CR9960-000
 603312-4
 607381P039
 617867N001
 6500750004
 D-306-38
 770-003S106W2
 770

 005S105W1
 770-005S106W1
 770-007A303
 770-010Y106W1
 770-010Y706W1
 7771210001
 MFP-1/4"-Clear
 MFP-3/64"-Clear
 790-3012

 MFT-MT2000-NO.14-0-SP
 MHHT-4-15K2-G-104
 MIL-LT-1-1/2-4-SP
 MIL-LT-1-1/2-9-STK
 MIL-LT-1/2-2-STK
 MIL-LT-3-0-SP
 MIL-LT-3/32-6-SP

 3/32-0-SP
 MIL-LT-3/32-6-SP
 MIL-LT-3/4-6-SP
 MIL-LT-3/8-0-SP
 8159270001
 839602-000
 8423-6
 FP301-116-6"-Black
 FP301-1/2-48"

 Black
 FP301-12-48"-Black-Hdr
 FP301-1/4-48"-Black
 FP301-1/4-48"-White-Hdr
 FP301-1-6"-Clear
 FP301-18-48"-Black-Hdr
 FP301-1/8-6"-

 Black
 FP301-18-6"-Black-Bulk
 FP301-316-48"-Blue-Hdr
 FP301-316-6"-Clear
 FP301-332-6"-Black
 912229N002
 120-126-16BL
 121-001-09

 121-018-32
 121-018-40
 121-123-1-1-32BTC
 S20-126-16BL
 121-001-09
 S20-126-16BL
 121-001-09