

AND262GCP

GaP Green Light Emission T-1 Package (3 mm)

Features

- High efficient green LED
- Peak wavelength (λp = 567 nm) high bright emission
- · All plastic mold type, clear colorless lens
- Low drive current: 10 to 20 mA recommended
- · Excellent On-Off contrast ratio
- · Fast response time, capable of pulse operation
- RoHS Compliant

Maximum Ratings ($T_a = 25$ °C)

Characteristics	Symbol	Rating	Unit
Forward Current	I _F	30	mA
Reverse Voltage	V _R	5	V
Power Dissipation	P _D	75	mW
Operating Temperature Range	T _{Opr}	-25 to 85	°C
Storage Temperature Range	T _{Stg}	-25 to 85	°C

Electro-Optical Characteristics ($T_a = 25$ °C)

Characteristics	Symbol	Test Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	V _F	I _F = 20 mA	_	2.2	2.6	V
Reverse Current	I _R	V _R = 4 V	_	-	50	μΑ
Luminous Intensity	I _V	I _F = 20 mA	70	110	-	mcd
Peak Emission Wavelength	Ι _P	I _F = 20 mA	_	567	_	nm
Spectral Line Half Width	Δλ	I _F = 20 mA	_	25	_	nm
Dominant Wavelength	λd	I _F = 20 mA	_	563	_	nm
Full Viewing Angle	θ	I _V = 1/2 Peak	_	36	_	degree

Precaution


Please be careful of the following:


- Soldering temperature: 260°C max Soldering time: 5 sec. max
 - Soldering portion of lead: up to 1.6 mm from the body of the device
- 2. The lead can be formed up to 5 mm from the body of the device without forming stress. Soldering should be performed after the lead forming.


Product specifications contained herein may be changed without prior notice.


It is therefore advisable to contact Purdy Electronics before proceeding with the design of equipment incorporating this product.




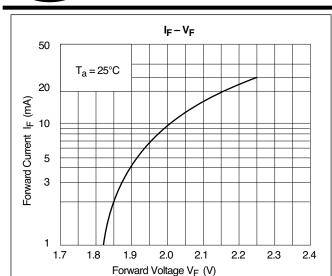


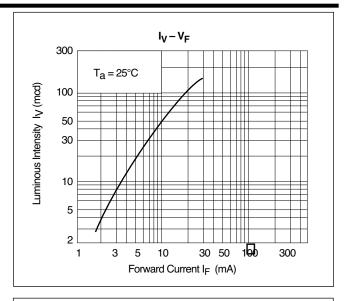

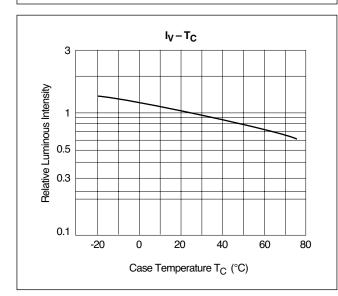

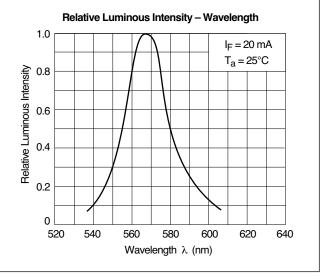

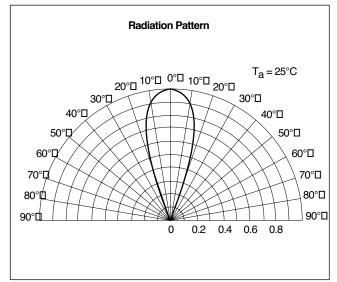

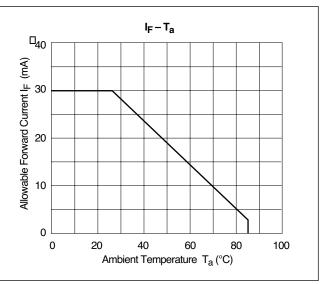

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for and manufacturer:

Other Similar products are found below:

EVB5.1 V5 ATMEGA32 AND241 AND113Y AVRPROG-MKII-ECO AND130CR AND113R AND180AYP AND721GST-LED
FE0203W-DU AND155CRP AND114YP FE0206W-DU AND262HBA AND113GP AND2451RGL AND114-R AND124R AND123R
AND120CRP AND240GCP