


- Very loud small horn with trumpet
- Suitable for indoor and outdoor mounting

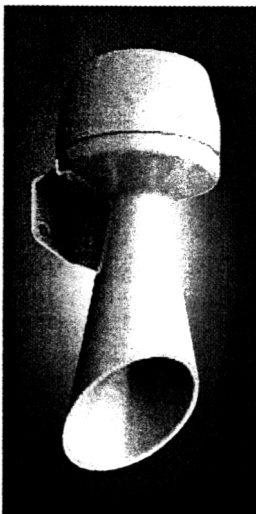

#### TECHNICAL SPECIFICATIONS:

Dimensions (Diam. x Height): 70 mm x 170 mm

Housing: ABS, high impact, grey

Connection: Screwable connection with wire protection,  
1mm<sup>2</sup> - 1.5 mm<sup>2</sup> fine strand, 1,0 mm<sup>2</sup> - 2.5 mm<sup>2</sup> single wire  
cable entry up to ø 9 mm

Duty cycle: 100 %

Fixing: Bracket mounting, Sound outlet facing downwards


#### ORDER SPECIFICATIONS:

	AC ~	Current consumption	DC =	Current consumption
12 V	-		582 052 54	150 mA
24 V	582 052 65	190 mA	582 052 55	70 mA
42 V	582 052 66	75 mA	-	
115 V	582 052 67	15 mA	-	
230 V	582 052 68	15 mA	-	

Other voltages available on request.

#### TECHNICAL DIAGRAMS

see page 117

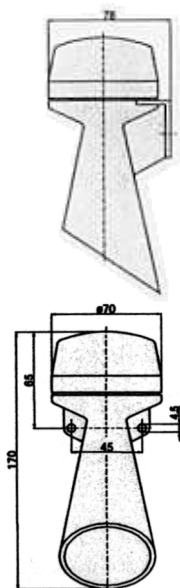

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Lighting Drivers](#) category:*

*Click to view products by [Werma](#) manufacturer:*

Other Similar products are found below :

[LV5235V-MPB-H](#) [MB39C602PNF-G-JNEFE1](#) [FAN5701UMP20X](#) [FAN5702UMP30X](#) [MIC2871YMK-T5](#) [MP1518DJ-LF-P](#) [MP3202DG-LF-P](#) [MP3304BDD-LF-P](#) [MP3306EG-LF-P](#) [MP3398AGY](#) [MP4033GK](#) [AL1676-10BS7-13](#) [AL1676-20AS7-13](#) [MX877RTR](#)  
[NCL30085BDR2G](#) [ICL8201](#) [IS31BL3506B-TTLS2-TR](#) [PAM2841GR](#) [A8519KLPTR-T](#) [FAN5701UMP08X](#) [FAN5702UMP20X](#) [AL3157F-7](#)  
[AL8807BQMP-13](#) [LV52204MTTBG](#) [MP2488DN-LF](#) [MP24893DQ-LF-P](#) [MP24894GJ-P](#) [MP24895GJ-P](#) [MP3308DL-LF-Z](#) [MP3393EF-LF](#)  
[MP3394SGF](#) [MP3802DQ-LF-P](#) [MP4008GS](#) [MP4031GS](#) [MP4032-1GS](#) [MP4034GS](#) [MP46885DN-LF](#) [SLG7NT4082V](#) [SLG7NT4082VTR](#)  
[PCA9955BTWQ900J](#) [TLD5095EL](#) [LED6001TR](#) [STP4CMPQTR](#) [BD1604MVV-E2](#) [MC10SX1130DG](#) [MAX16832CASAT](#)  
[MAX16814CATP+](#) [NCL30086BDR2G](#) [NCL30088BDR2G](#) [IS31LT3350-V1SDLS2-EB3CH](#)