



Quality Products. Service Excellence.

Universal Single Ended Tube Output 125SE Series

Audio


Features



- Designed for general purpose or replacement use (not Hi-Fi), in single ended, tube output circuits.
- Frequency response: 100 Hz. - 15 KHz at full rated power (+/- 1db max. - ref. 1 KHz).
- For full frequency response (20 Hz. to 20 KHz.) - see our **1627-1642 Series**.
- For push-pull output use, see our **125 Series**.
- Open style with minimum 12" long primary & secondary leads.
- All sizes use butt stacked cores (using 29M6 steel) with an air gap, to reduce D.C. core saturation.
- Primary impedance range from 2,500 to 10,000 Ohms.
- Secondary impedance range from 4 to 32 Ohms.



Gallery

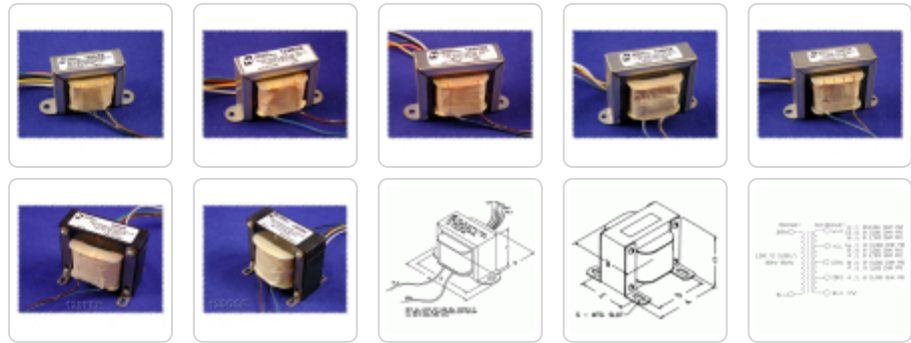

Part No.	Audio Power (Watts)	Max. D.C. Bias (ma)	Weight (lbs.)	Dimensions					Mounting Hole	
				A	B	C	D	E	G	
125ASE	3	25	0.5	2.81	1.35	1.69	2.38	-	0.19	
125BSE	5	45	1.1	3.25	1.63	2.00	2.81	-	0.19	
125CSE	8	60	1.3	3.69	1.86	2.31	3.13	-	0.19	
125DSE	10	70	2	4.00	2.10	2.63	3.56	-	0.19	
125ESE	15	80	3	4.50	2.36	2.94	4.00	-	0.19	
125FSE	20	90	4.5	3.76	2.52	3.15	3.13	2.25	0.20 x 0.38	
125GSE	25	100	6	4.15	2.88	3.46	3.45	2.50	0.20 x 0.38	

Part No.	Primary Winding Data	
	Inductance (Minimum)	DC Resistance (+/- 20%)
125ESE	5.43 H	103 Ohms

Data subject to change without notice

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:

Click to view products by [Hammond](#) manufacturer:

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#) [H5084FNLT](#)
[B78476A9558A003](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [HX5014FNL](#) [EX2024FNL](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#) [HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [P2004NLT](#) [T1142NL](#) [HX6101FNL](#) [HX5084FNL](#) [HX1148NL](#) [HX5020FNLT](#) [HX5014FNLT](#)
[T1124NL](#) [1879732-1](#)