




Quality Products. Service Excellence.


Low Profile Audio 141 Series

PC Board Mount

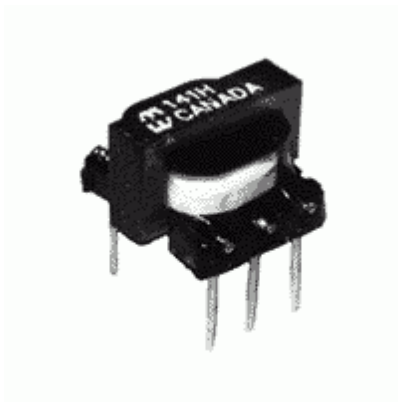

Features

- Pin type (0.25" length & 0.035" diameter), P.C. board mount
- Low profile, open type construction
- Frequency response 200 Hz. - 50 Khz. (+/- 1 db, ref. @ 1 Khz.)
- Net weight 0.6 oz.

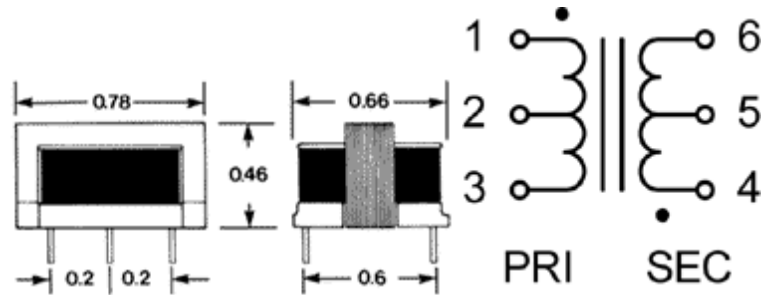

Part No.	Nominal Impedance (Ohms)		Max. Pri. D.C. current (ma.)	D.C. Resistance (Ohms)		Output (Milliwatts)
	Primary	Secondary		Primary	Secondary	
141B	200 K	1000	0	3775	85	4
141D	3000 ct	1000 ct	1	120	51	150
141F	25 K	50	2	1645	65	100
141H	600 ct	600 ct	2	32	45	150
141M	30 K	1200 ct	2	1100	47	100
141P	1200 ct	8	2	50	0.45	150

Note: Part number 141M is incorrectly listed as having a 300K primary impedance in our latest catalogs, the primary is actually 30K as shown above.

Data subject to change without notice

© 2022. Hammond Manufacturing Ltd. All rights reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:

Click to view products by [Hammond](#) manufacturer:

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#) [H5084FNLT](#)
[B78476A9558A003](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [HX5014FNL](#) [EX2024FNL](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#) [HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [P2004NLT](#) [T1142NL](#) [HX6101FNL](#) [HX1148NL](#) [HX5020FNLT](#) [HX5014FNLT](#) [T1124NL](#) [1879732-1](#)
[2-1879391-5](#)