




Quality Products. Service Excellence.

# Isolation - Step Down (230VAC to 115VAC) 172 Series

Plug-In




## Features

- Primary 230VAC, 50/60 Hz. Secondary 115VAC
- Circuit breaker in primary.
- Provides circuit isolation & steps down primary voltage.
- Hi-pot tested to 2 KV RMS.
- Electrostatic shield between primary & secondary.
- Input (primary) connected to a 5 foot long cord & European (Schuko) grounded plug - NOTE: old inventory only.
- Input - due to U.L changes in 2007 - NEW production with the European (Shuko) parts would no longer be U.L. listed. Therefore, we have replaced this input plug with a standard North American 3-wire, 250V plug (NEMA 6-15P).
- Output (secondary) connected to a 1 foot long cord & standard North American 3-wire grounded receptacle (NEMA 5-15R).
- North American Mark of Safety - C UL & UL listed (File #E211544).
- Indoor use only.
- **Remember** - These units do NOT convert line frequency

## Accessories

- International Grounded Adaptor Plugs

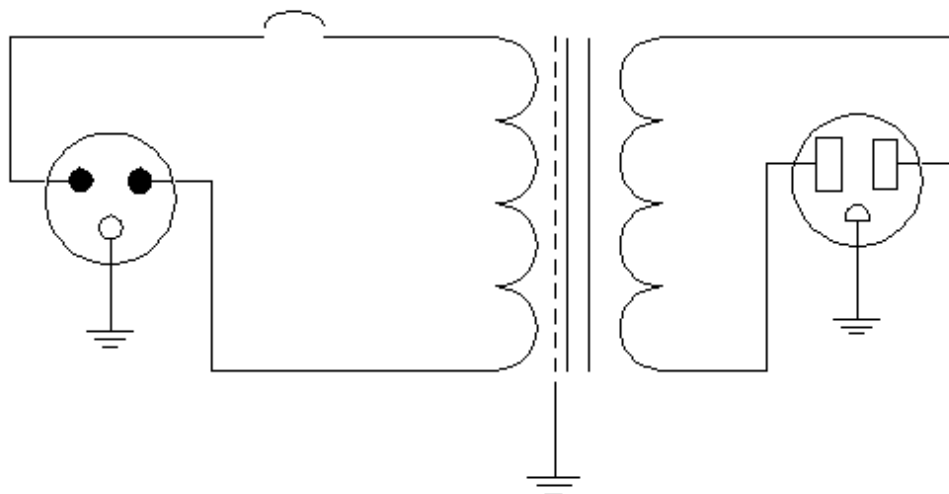

Part No.	VA	Capacity Leakage Current	Full Load Total			Surge / Noise Suppression	Capacitance		Overall Dimensions					Weight Lbs
			Efficiency	Harmonic Distortion			Between Windings at 1KHz	A	B	C	D	E		
172A	100	40.48 $\mu$ A	88%	0.19%		-35 dB	40 pF	3.80	5.06	4.68	3.00	3.38	6.5	

Part No.	Capacity		Full Load Total			Surge / Noise		Capacitance		Overall Dimensions					Weight Lbs
	VA	Leakage Current	Efficiency	Harmonic Distortion	Suppression	Between Windings at 1KHz		A	B	C	D	E			
	<b>172B</b>	200	41.97 $\mu$ A	91%	0.18%	-34.32 dB	20 pF		3.80	5.56	4.68	3.00	3.88	8.5	
<b>172D</b>	500	68.22 $\mu$ A	96%	0.23%	-37.69 dB	28 pF		3.80	7.06	4.68	3.00	5.38	18.5		
<b>172E</b>	750	79.58 $\mu$ A	94%	0.19%	-38.24 dB	20 pF		4.40	8.70	5.39	3.50	6.78	30		
<b>172F</b>	1000	94.08 $\mu$ A	96%	0.18%	-32.74 dB	40 pF		5.28	7.75	6.38	4.25	6.00	34.5		

*Data subject to change without notice*

© 2021. Hammond Manufacturing Ltd. All rights reserved.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power Transformers](#) category:*

*Click to view products by [Hammond](#) manufacturer:*

Other Similar products are found below :

[1-1672275-3](#) [A41-43-20A20](#) [DST5-120B39](#) [14A-56-36B42](#) [EN2997SE61808F8](#) [9-1611461-2](#) [29768](#) [1654308-1](#) [170R](#) [ST2-12B42](#) [ST3-12B5](#) [ST6118T-R](#) [PE-68421NL](#) [PL2.5-12-130B-C](#) [PoE4W3x5.0-R](#) [POE7W3X3.3-R](#) [4000-20C02K999](#) [4001-09W15AE777](#) [48RO-5000G-SIL](#) [TRA-0130-R](#) [XON7-15/2](#) [47045010](#) [1-1611760-0](#) [EN2997SE61808F9](#) [OPT110F-EAS00004AU](#) [XON25-9/24](#) [XON01349](#) [XON01200](#) [XDCA001/INER01](#) [PE-68414NL](#) [F-91X](#) [F-29U](#) [DST4-16B10](#) [P-8577](#) [T50-24M3](#) [1-1672277-2](#) [1-1672277-0](#) [1-1672275-5](#) [1-1672275-0](#) [PC-24-180B18](#) [750315125](#) [POE13W2VERS-R](#) [PA2380NL](#) [14A-10-12B9](#) [PE-68411NL](#) [DPC-28-160B50](#) [PA0803NL](#) [750315836](#) [20AMPS-CSTNLKIT](#) [PC-24-50 SIGNAL](#)