

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

| 孔位 | A-(mm) | B-(mm) | C-(mm) |
|-------|--------|--------|--------|
| 2P | 1.25 | 7.5 | — |
| 3P | 2.50 | 8.75 | — |
| 4P | 3.75 | 10.00 | 2.50 |
| 5P | 5.00 | 11.25 | 3.75 |
| 6P | 6.25 | 12.50 | 5.00 |
| 7P | 7.50 | 13.75 | 6.25 |
| 8P | 8.75 | 15.00 | 7.50 |
| 9P | 10.00 | 16.25 | 8.75 |
| 10P | 11.25 | 17.50 | 10.00 |
| 11P | 12.50 | 18.75 | 11.25 |
| 12P | 13.75 | 20.00 | 12.50 |
| 13P | 15.00 | 21.25 | 13.75 |
| 14P | 16.25 | 22.50 | 15.00 |
| | | | |
| 20P | 23.75 | 30.15 | 22.50 |

技术要求


1: 外观要求

- 1-1. 插针表面光洁、无损伤、锈蚀等缺陷。
- 1-2. 基座表面无脏污、飞边、排气不良等缺陷。

2: 电气性能:

- 2-1. 额定电流: 1.0A
- 2-2. 额定电压: 125V
- 2-3. 耐电压: 250V
- 2-4. 接触电阻: $\leq 20m\Omega$
- 2-5. 绝缘电阻: $\geq 100m\Omega$

3: 工作温度: $-25^{\circ}C \sim +85^{\circ}C$

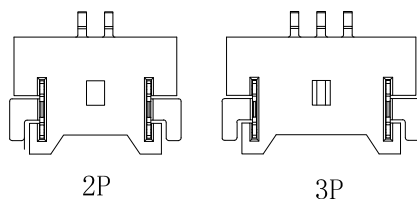

| | | | | | | |
|----------|---------|----------|----------------|------------------------|---------------------------------------|--------------------|
| new | | 2015/5/3 | | A | | 瀚源 |
| ECN BO. | | DATE. | | REV. | | |
| DESIGNED | CHECKED | APPROVAL | DRAWING NUMBER | SCALT: 1/2 | | SCALE: 3:1 |
| Mikey | Tom | Jerry | PART NAME | 9827WRS-XXP | UNLESS OTHERWISE SPECIFIED,TOLERANCE: | X. ±0.25 |
| | | | MODEL NAME | 9827WRS-XXP | | X.x ±0.20 |
| | | | 3RD ANGLE PROJ | HanElectricity Co.,LTD | | |
| | | | | FILE.NO. | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [HanElectricity](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)