

## H2TCM1-83X+



10-8000MHz

50Ω 1:1 Transmission Line Transformer

### Features





- DC Current: 30mA
- Input Power: 200mW
- 260°C Reflow Compatible
- RoHS compliant and lead free
- Operating temperature range: -40 C to +85 C
- Storage temperature range: -55 C to +100 C

### Applications


- For Motorola Walkie-talkie.
- For Car Streaming Media Rearview Mirror.
- For Broadband and Wireless Communications.
- For Wireless Microphone & Marine Communications.
- For Ideally Suited LTE, Cellular, UMTS, WiFi, WiMAX.
- For Differential Modulator/demodulator and Active Mixers.

Electrical Specifications: TA=25°C, 0dBm, Z0=50Ω


Parameter	Test Conditions	Units	Min	Typ	Max
Main line Loss (Pin3-4)	10-8000MHz	dB	—	2.0	3.0
Main line Loss (Pin3-5)	10-8000MHz	dB	—	2.5	3.0
Amplitude Balance	10-8000MHz	dB	0.0	1.5	2.5
Phase Balance	10-8000MHz	°	0.0	10.0	30.0
Input Return Loss(Pin3)	10-8000MHz	dB	10.0	16.0	—

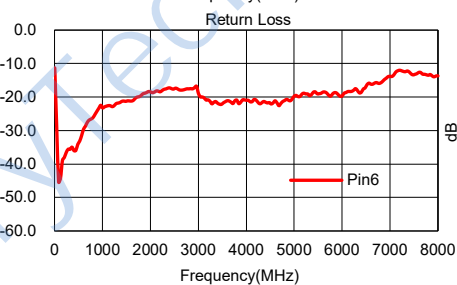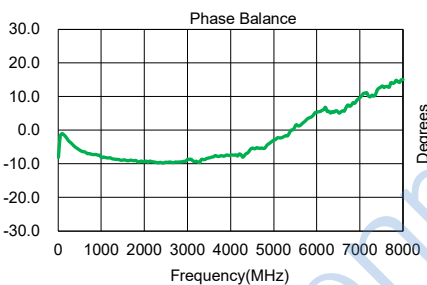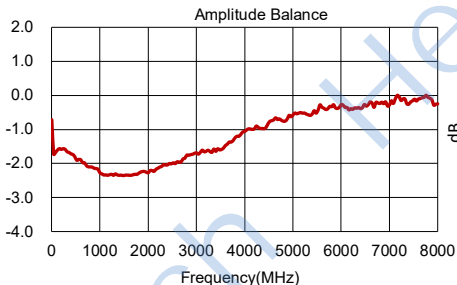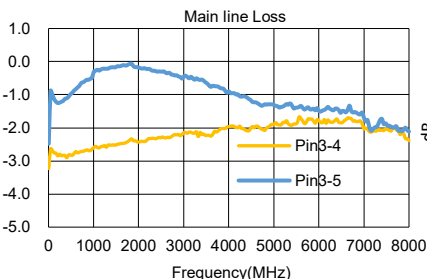


### Outline Drawing(mm)

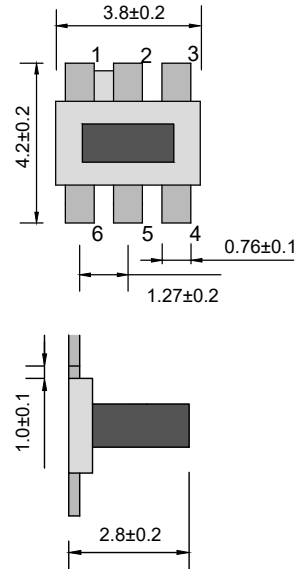

### Electrical structure

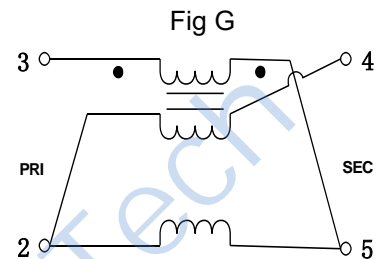

### Recommended layout(mm)



### Pin Connections

Input	3
Output 1	4
Output 2	5
Ground	2
Not Used	1, 6

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning](#) category:*

*Click to view products by [HenryTech](#) manufacturer:*

Other Similar products are found below :

[PD0409J5050S2HF](#) [HHS-109-PIN](#) [AFS14A35-1591.50-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [FM-104-PIN](#) [CER0813B](#)  
[MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#)  
[CDBLB455KCAX39-B0](#) [RF1353C](#) [051157-0000](#) [PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [TP-103-PIN](#)  
[BD1222J50200AHF](#) [BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [DS-327-PIN](#) [MACP-008125-](#)  
[CK07F0](#) [DS-329-PIN](#) [DS-313-PIN](#) [TP-104-PIN](#) [TP-101-PIN](#) [HH-128-PIN](#) [8594810000](#) [T-1000-N](#) [JP506S](#) [XC0900P-10S](#) [XC0900B-30S](#)  
[CHE1260-QAG](#) [11305-10](#) [5962-9091202MXA](#) [3A412S](#) [X3C06A4-03S](#) [B39000Z3410A4](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#)  
[B39242B4360P810](#) [B39781B8005P810](#)