

## H3-MABA-009210-CT1760

50-1200MHz 75Ω 1:1 Balun


### APPLICATIONS

- Ideally suitable for CATV broadband applications.

### FEATURES

- Surface mount
- Impedance ratio: 1:1
- Suitable for use in 50 Ohm and 75 Ohm systems
- RoHS compliant and Pb free
- Available on tape and reel

### DIMENSIONS

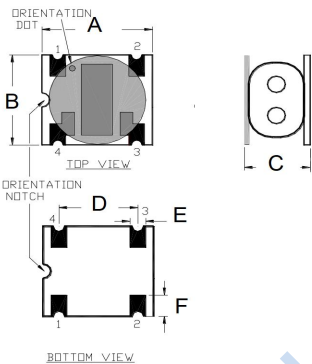


A	B	C
7.11±5%	6.35±5%	4.36±10%
D	E	F
5.08	1.00	1.50

Unless otherwise stated dimensions are in mm


Tolerance: .xx ± 0.25, .xxx ± 0.05

### Land Pattern



G	H	I
1.27	2.40	3.05
J		
5.08		

### FUNCTIONAL SCHEMATIC

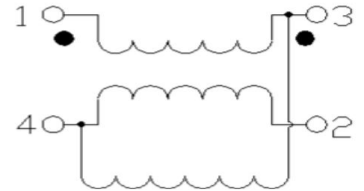

### PIN CONFIGURATION

Pin No.	Function
1	Primary Dot (input)
2	Secondary (o/p coupled)
3	Secondary Dot (o/p through)
4	Primary (ground)

### ELECTRICAL SPECIFICATIONS@25°C:

Parameters (P#: ENA PORT)	frequency band	Min.	Typ.	Max.	Unit
Port Impedance, Z0			75		Ohm
Insertion Loss 1 (pin3-pin1)	50MHz		0.1	0.33	dB
	870MHz		0.5	0.93	dB
	1002MHz		0.6	1.18	dB
	1200MHz		0.8	1.93	dB
Insertion Loss 2 (pin2-pin1)	50MHz		0.4	0.62	dB
	870MHz		0.3	0.63	dB
	1002MHz		0.4	0.78	dB
	1200MHz		0.6	1.33	dB
Phase Balance	50-1002MHz		1.3	4.0	Deg
	1002-1200MHz		3.3	8.0	Deg
Amplitude Balance	50MHz		0.3	0.6	dB
	870MHz		0.1	0.7	dB
	1002MHz		0.2	0.7	dB
	1200MHz		0.4	0.8	dB
Input Return Loss	50-500MHz	18.0	23.0		dB
	500-1002MHz	17.5	19.0		dB
	1002-1200MHz	11.0	18.0		dB

### ABSOLUTE MAXIMUM RATINGS

Parameter	Value
RF Power	500 mW
DC Current	500 mA
Operating Temperature Range	-40 to 85°C
Storage Temperature Range	-40 to 85°C






Tel: +86-28-85589664

E-mail: mr\_li@henglitaitech.com

Web: www.hltchips.com

Adress:No.198 Tianqin East Street, Gaoxin West District, Chengdu City

## TEST CURVE

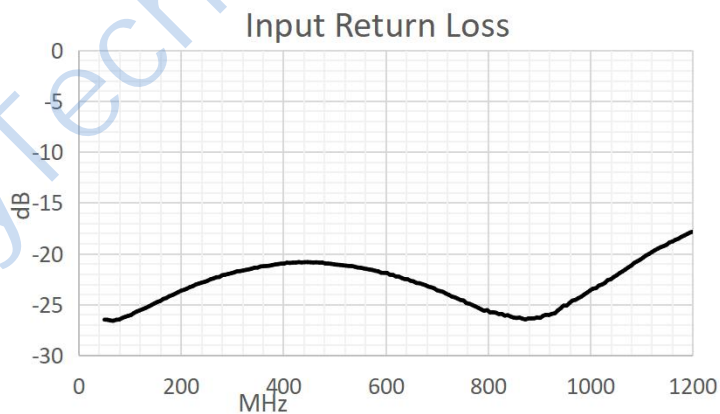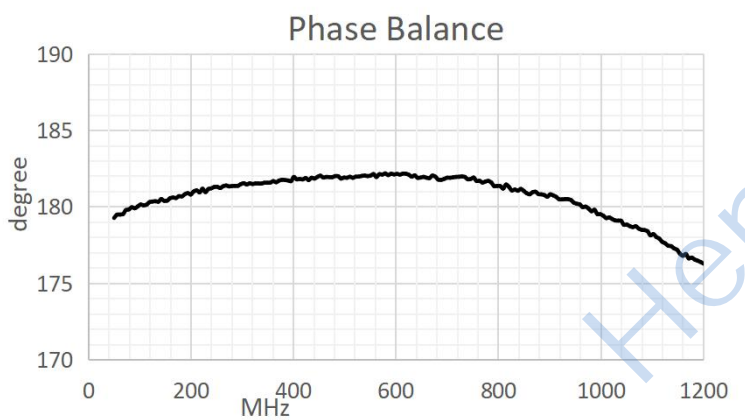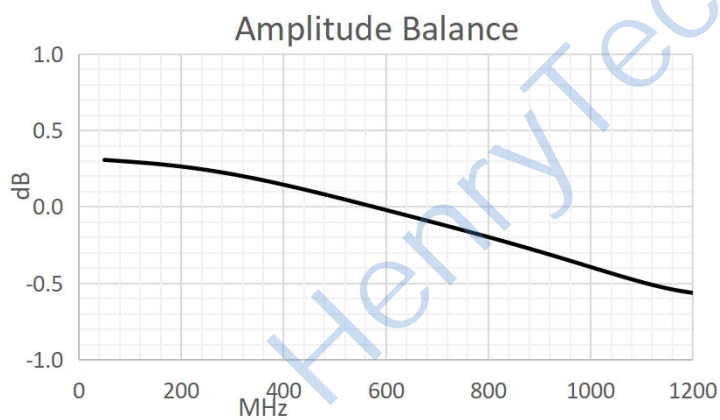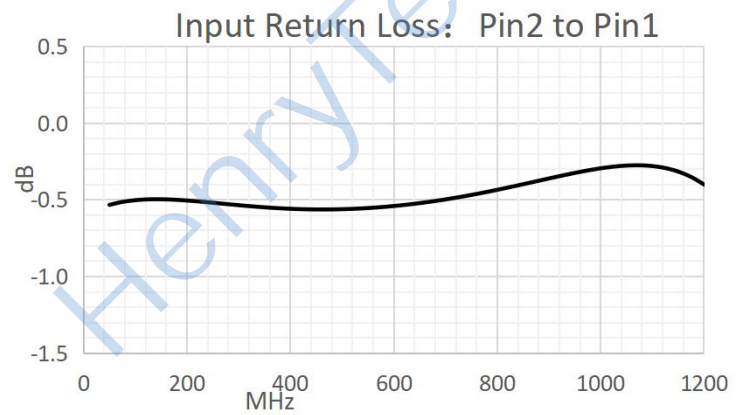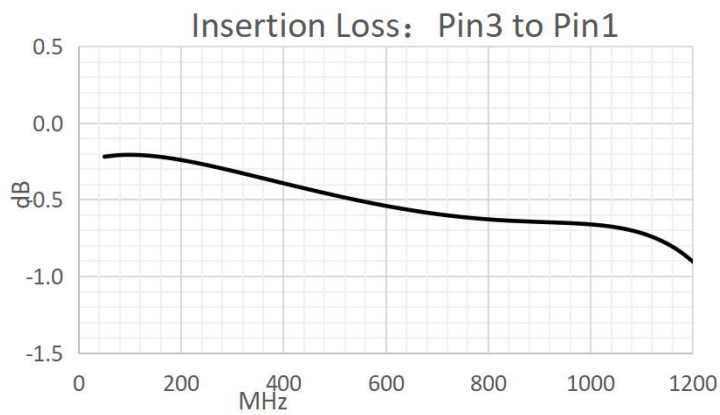

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning](#) category:*

*Click to view products by [HenryTech](#) manufacturer:*

Other Similar products are found below :

[PD0409J5050S2HF](#) [HHS-109-PIN](#) [AFS14A35-1591.50-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [FM-104-PIN](#) [CER0813B](#)  
[MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#)  
[CDBLB455KCAX39-B0](#) [RF1353C](#) [051157-0000](#) [PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [TP-103-PIN](#)  
[BD1222J50200AHF](#) [BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [DS-327-PIN](#) [MACP-008125-](#)  
[CK07F0](#) [DS-329-PIN](#) [DS-313-PIN](#) [TP-104-PIN](#) [TP-101-PIN](#) [HH-128-PIN](#) [8594810000](#) [T-1000-N](#) [JP506S](#) [XC0900P-10S](#) [XC0900B-30S](#)  
[CHE1260-QAG](#) [11305-10](#) [5962-9091202MXA](#) [3A412S](#) [X3C06A4-03S](#) [B39000Z3410A4](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#)  
[B39242B4360P810](#) [B39781B8005P810](#)