

## H3-MABACT0071

3-200MHz 75Ω 1:1 Balun


### • APPLICATIONS

• Ideally suitable for CATV broadband applications.

### • FEATURES


- Surface mount
- Impedance ratio: 1:1
- Centre tap on secondary
- RoHS compliant and Pb free
- Available on tape and reel

### DIMENSIONS

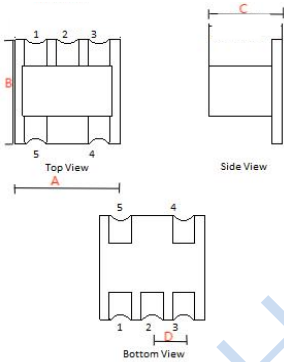

A	B	C
4.27	4.27	2.53
D		
1.27		

### Land Pattern



E	F	G
1.40	0.76	1.27
H		
4.83		


Unless otherwise stated dimensions are in mm

Tolerance: .xx ± 0.25, .xxx ± 0.05

### ELECTRICAL SPECIFICATIONS@25°C:

Parameters (P#: ENA PORT)	frequency band	Min.	Typ.	Max.	Unit
Port Impedance, Z0 (P1 / P2 / P3)			75 / 37.5 / 37.5		Ohm
Insertion Loss (pin 5-1)	3-5MHz		1.00	2.60	dB
	5-200MHz		0.50	0.90	dB
Insertion Loss (pin 5-3)	3-10MHz		1.00	2.60	dB
	10-200MHz		0.40	0.75	dB
Amplitude Balance	3-200MHz		0.10	±0.3	dB
Phase Balance	3-200MHz		0.30	±3	Deg
Input Return Loss	3-5MHz	5	13		dB
	5-120MHz	19	27		dB
	120-200MHz	15	21		dB


### FUNCTIONAL SCHEMATIC

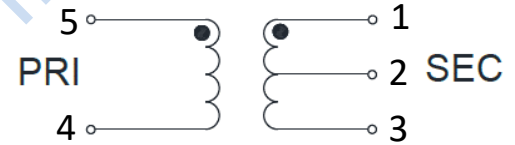

### PIN CONFIGURATION

Pin No.	Function
1	Secondary Dot
2	Secondary centre Tap
3	Secondary
4	Primary
5	Primary Dot

### APPLICATION & TEST CIRCUIT

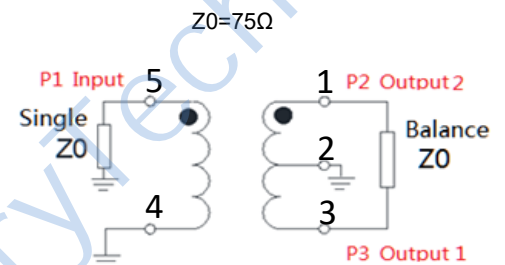


RF ports: P1/P2/P3

### ABSOLUTE MAXIMUM RATINGS


Parameter	Value
Input Power	250mW Max
DC Current	240mA Max
Operating Temperature Range	-40 to 85°C
Storage Temperature Range	-55 to 100°C

## TEST CURVE


Insertion Loss: Pin 5 to Pin 1

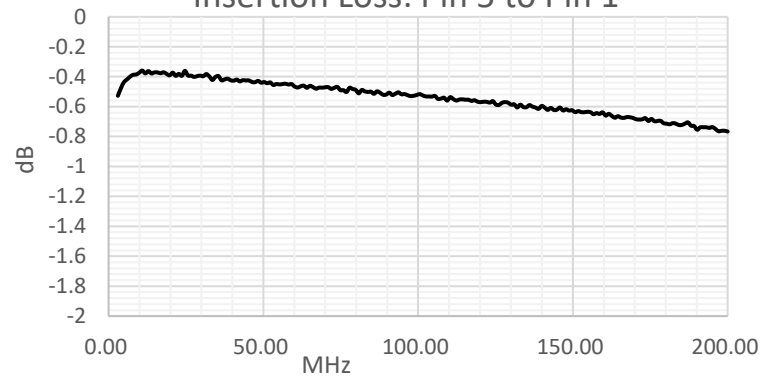

Insertion Loss: Pin 5 to Pin3

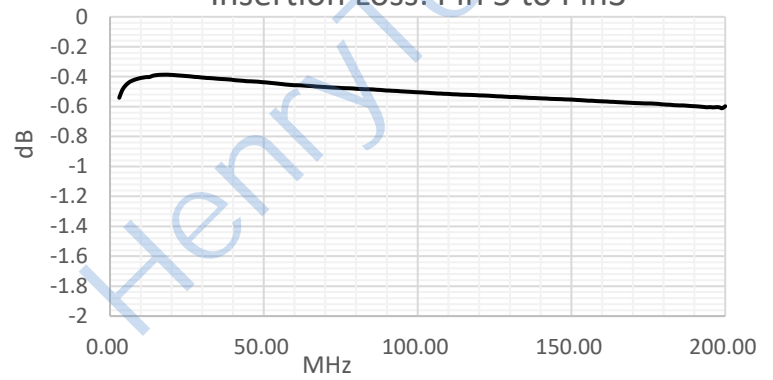


Amplitude Balance

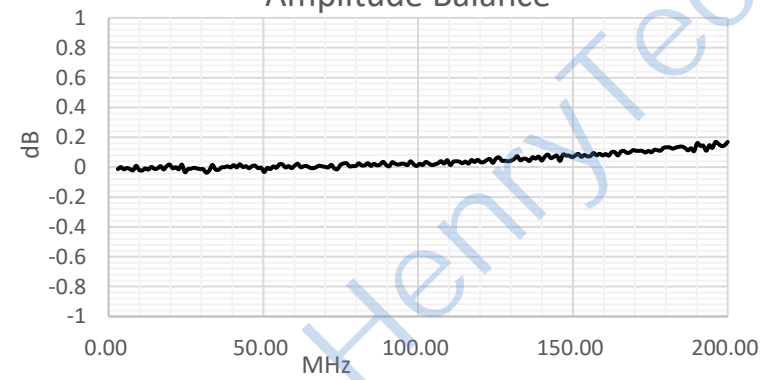

Phase Balance



Input Return Loss: Pin 1

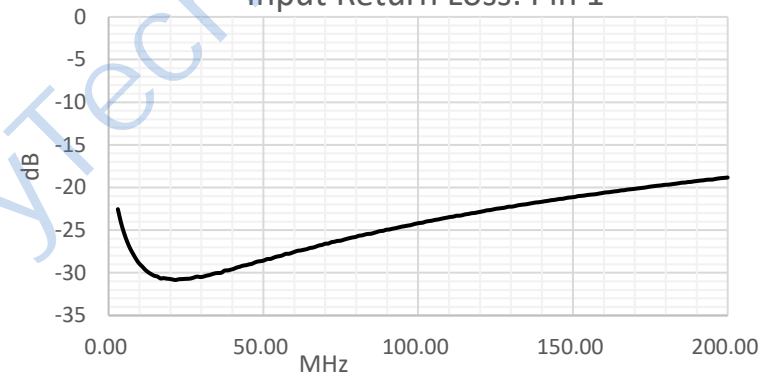

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning](#) category:*

*Click to view products by [HenryTech](#) manufacturer:*

Other Similar products are found below :

[PD0409J5050S2HF](#) [HHS-109-PIN](#) [AFS14A35-1591.50-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [FM-104-PIN](#) [CER0813B](#)

[MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#)

[CDBLB455KCAX39-B0](#) [RF1353C](#) [051157-0000](#) [PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [TP-103-PIN](#)

[BD1222J50200AHF](#) [BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [DS-327-PIN](#) [MACP-008125-](#)

[CK07F0](#) [DS-329-PIN](#) [DS-313-PIN](#) [TP-104-PIN](#) [TP-101-PIN](#) [HH-128-PIN](#) [8594810000](#) [T-1000-N](#) [JP506S](#) [XC0900P-10S](#) [XC0900B-30S](#)

[CHE1260-QAG](#) [11305-10](#) [5962-9091202MXA](#) [3A412S](#) [X3C06A4-03S](#) [B39000Z3410A4](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#)

[B39242B4360P810](#) [B39781B8005P810](#)