

H3-MACP-011051

5-1225MHz 75Ω 7.5dB Coupler

APPLICATIONS



Ideally suited for CATV Broadband applications.

FEATURES

- Surface mount
- 7.5dB Coupler
- RoHS compliant and Pb free
- Available on tape and reel

DIMENSIONS

Land Pattern

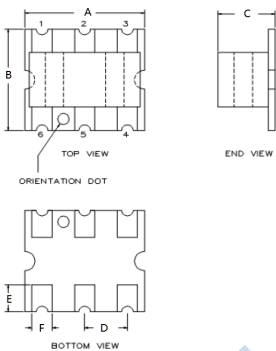

A	B	C
7.11	6.35	3.10
D	E	F
2.54	1.70	1.20

G	H	I
1.30	2.15	6.71
J		
2.54		


Unless otherwise stated dimensions are in mm

Tolerance: .xx ± 0.25, .xxx ± 0.05

ELECTRICAL SPECIFICATIONS@25°C:

Parameters (P#: ENA PORT)	frequency band	Min.	Typ.	Max.	Unit
Port Impedance, Z0(P1/P2/P3/P4)			75/75/75/75		Ohm
Coupling (pin1-3)	5 - 1225 MHz	7.0	7.5	8.5	dB
Main Line Loss (pin1-6)	5 - 1000 MHz		1.7	2.1	dB
	1000 - 1225 MHz		1.9	2.5	dB
Input Return Loss (pin1)	5 - 500 MHz	17	19		dB
	500 - 1225 MHz	12	15		dB
Output Return Loss (pin6)	5 - 500 MHz	17	20		dB
	500 - 1225 MHz	12	14		dB
Coupled Return Loss (pin3)	5 - 50 MHz	17	18		dB
	50 - 1225 MHz	15	17		dB
Isolation	5 - 500 MHz	30	34		dB
	500 - 1225 MHz	17	21		dB


FUNCTIONAL SCHEMATIC

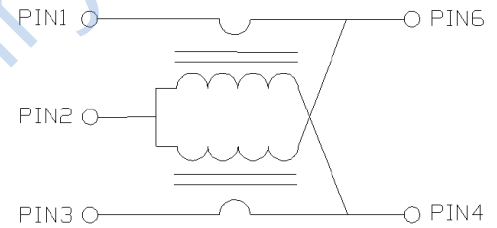

PIN CONFIGURATION

Pin No.	Function
1	Input
2	Ground
3	Coupled
4	Isolated
5	Not Connected
6	Output

APPLICATION & TEST CIRCUIT

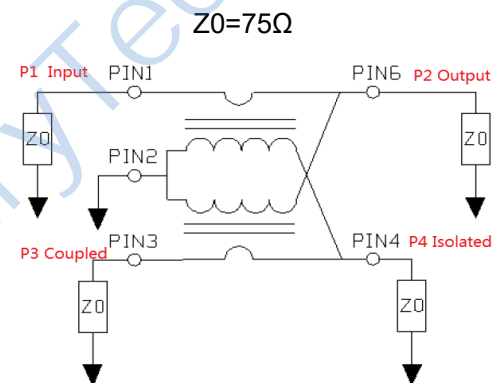

ABSOLUTE MAXIMUM RATINGS

Parameter	Value
Input RF Power	2W Max
DC Current	500mA Max
Operating Temperature Range	-40 to 95°C

Tel: +86-28-85589664


E-mail: mr_li@henglitaitech.com

Web: www.hltchips.com


Address: No.198 Tianqin East Street, Gaoxin West District, Chengdu City

TEST CURVE


Coupling (pin1-3)

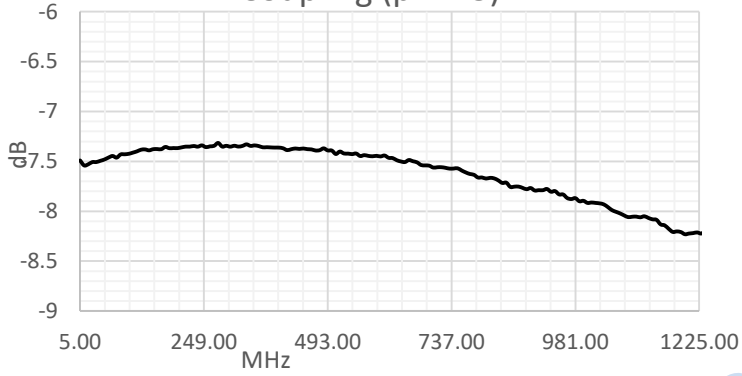


Main Line Loss (pin1-6)

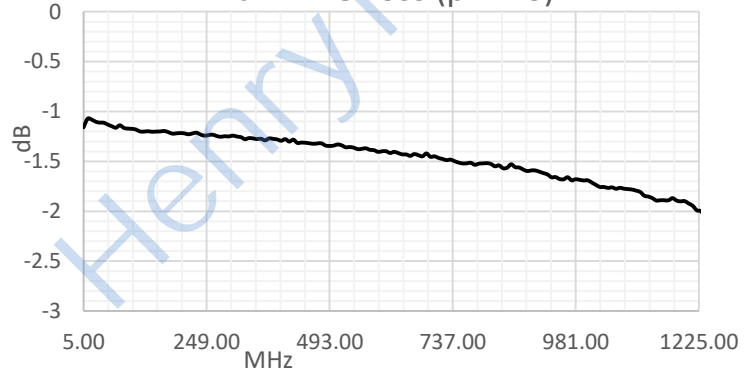


Input Return Loss (pin1)

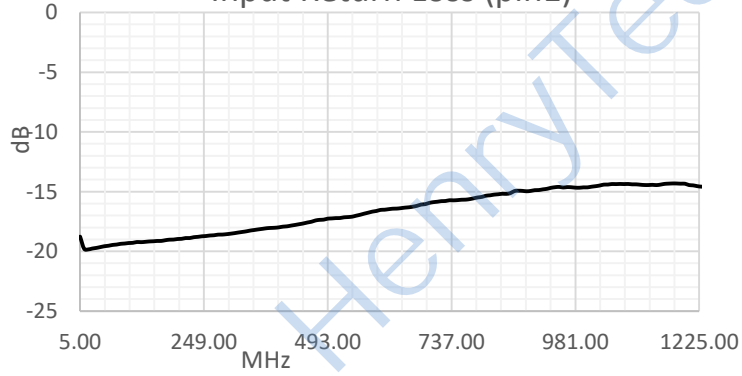


Output Return Loss (pin6)

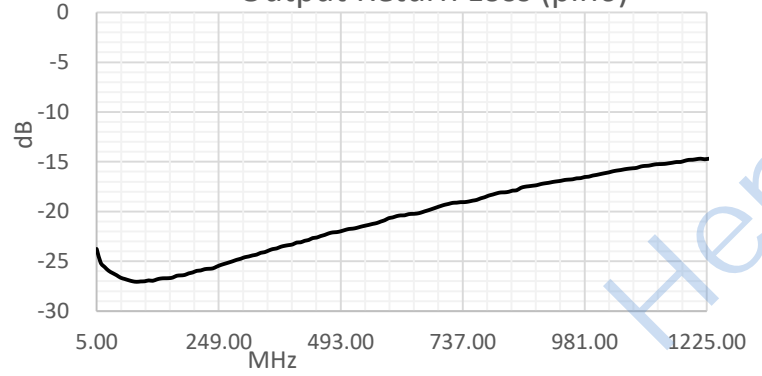

Coupled Return Loss (pin3)

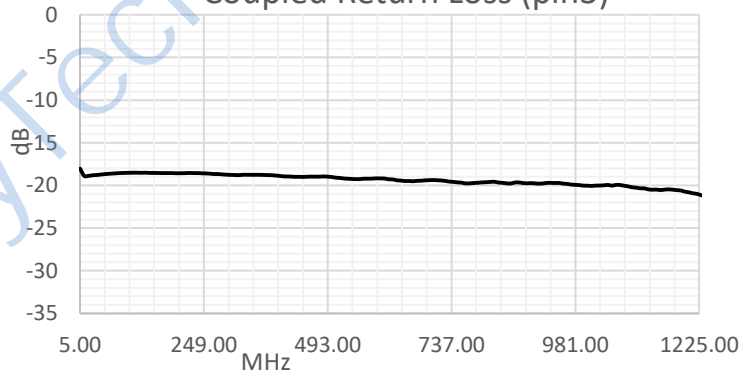

Isolation (pin1-4)

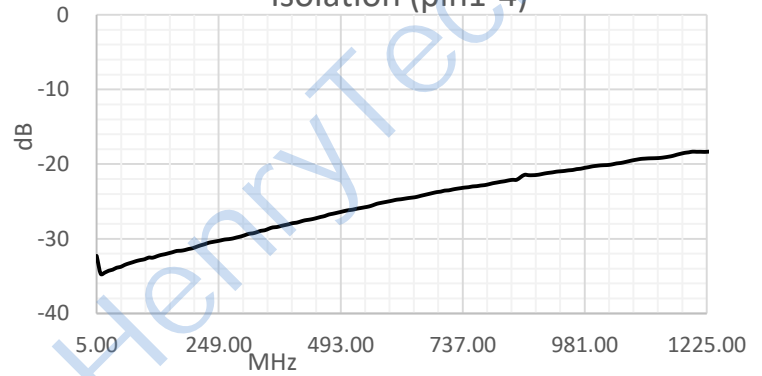

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [HenryTech](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [HHS-109-PIN](#) [AFS14A35-1591.50-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [FM-104-PIN](#) [CER0813B](#)

[MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#)

[CDBLB455KCAX39-B0](#) [RF1353C](#) [051157-0000](#) [PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [TP-103-PIN](#)

[BD1222J50200AHF](#) [BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [DS-327-PIN](#) [MACP-008125-](#)

[CK07F0](#) [DS-329-PIN](#) [DS-313-PIN](#) [TP-104-PIN](#) [TP-101-PIN](#) [HH-128-PIN](#) [8594810000](#) [T-1000-N](#) [JP506S](#) [XC0900P-10S](#) [XC0900B-30S](#)

[CHE1260-QAG](#) [11305-10](#) [5962-9091202MXA](#) [3A412S](#) [X3C06A4-03S](#) [B39000Z3410A4](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#)

[B39242B4360P810](#) [B39781B8005P810](#)