

DUAL OPERATIONAL AMPLIFIER


DESCRIPTION

The RC4580 is the dual operational amplifier, specially designed for improving the tone control, which is most suitable for the audio application.


Featuring noiseless, higher gain bandwidth, high output current and low distortion ratio, and it is most suitable not only for acoustic electronic parts of audio pre-amp and active filter, but also for the industrial measurement tools. It is also suitable for the head phone amp at higher output current, and further more, it can be applied for the handy type set operational amplifier of general purpose in application of low voltage single supply type which is properly biased of the input low voltage source.

FEATURES


- *Operating Voltage ($\pm 2V$ to $\pm 16V$)
- *Low Input Noise Voltage ($0.8 \mu V_{rms}$ typ.)
- *Wide Gain Bandwidth Product ($15MHz$ typ.)
- *Low Distortion (0.0005% typ.)
- *Slew Rate ($5V/\mu s$ typ.)
- *Bipolar Technology

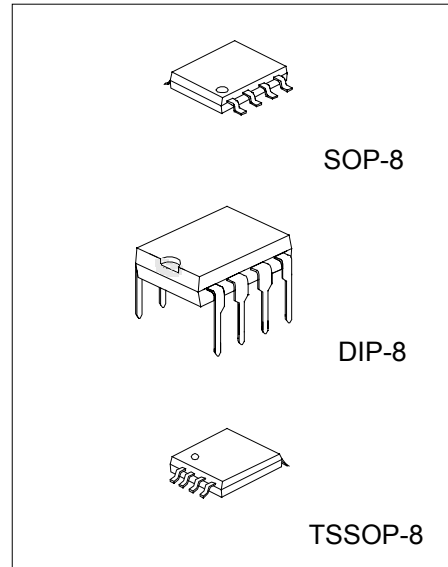

PIN CONFIGURATION

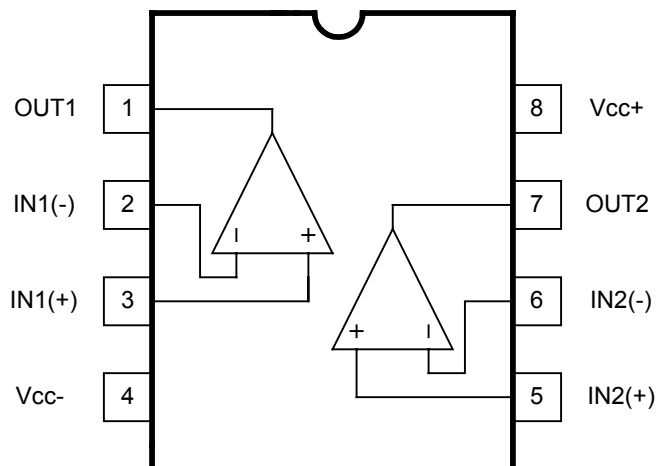

TEST CIRCUIT

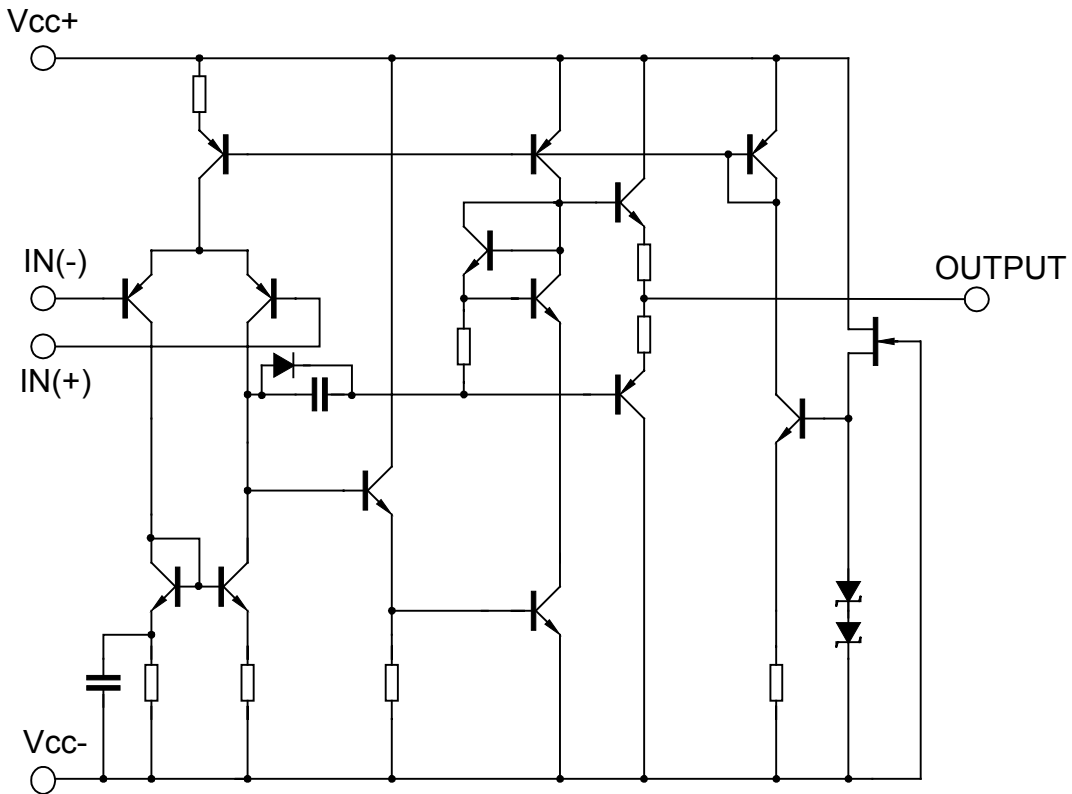

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)


PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+V^-	± 16	V
Input Voltage	V_{IC}	± 15	V
Differential Input Voltage	V_{ID}	± 30	V
Output Current	I_o	± 50	mA
Power Dissipation	P_D	300 (SOP-8) 800 (DIP-8) 250(TSSOP-8)	mW
Operating Temperature Range	T_{opr}	-40 to +85	°C
Storage Temperature Range	T_{stg}	-40 to +125	°C

ELECTRICAL CHARACTERISTICS ($V^+/V^- = \pm 15V, T_a = 25^\circ C$)


PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Input Offset Voltage	V_{IO}	$R_S \leq 10k\Omega$	-	0.5	3	mV
Input Offset Current	I_{IO}		-	5	200	nA
Input Bias Current	I_B		-	100	500	nA
Large Signal Voltage Gain	A_V	$V_o = \pm 10V, R_L \geq 2k\Omega$	90	110	-	dB
Output Voltage Swing	V_{OM}	$R_L >= 2k\Omega$	± 12	± 13.5	-	V
Input Common Mode Voltage Range	V_{ICM}		± 12	± 13.5	-	V
Common Mode Rejection Ratio	CMR	$R_S \leq 10k\Omega$	80	110	-	dB
Supply Voltage Rejection Ratio	SVR	$R_S \leq 10k\Omega$	80	110	-	dB
Operating Current	I_{CC}		-	6	9	mA
Slew Rate	SR	$R_L \geq 2k\Omega$	-	5	-	V/ μs
Gain bandwidth Product	GB	$f = 10KHz$	-	15	-	MHz
Total Harmonic Distortion	THD	$A_v = 20dB, V_o = 5V, R_L = 2k\Omega, f = 1KHz$	-	0.0005	-	%
Input Noise Voltage	V_{NI}	RIAA $R_s = 2.2 k\Omega, 30kHz LPF$	-	0.8	-	μV_{rms}

TYPICAL CHARACTERISTICS


Maximum Output Voltage Swing vs. Load Resistance

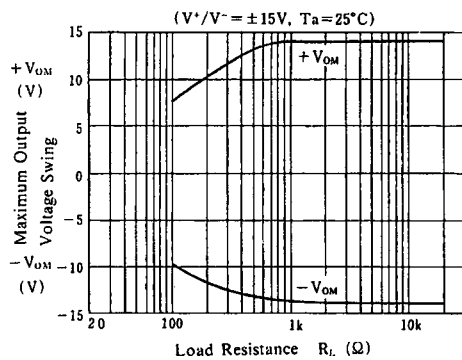


Maximum Output Voltage Swing vs. Frequency

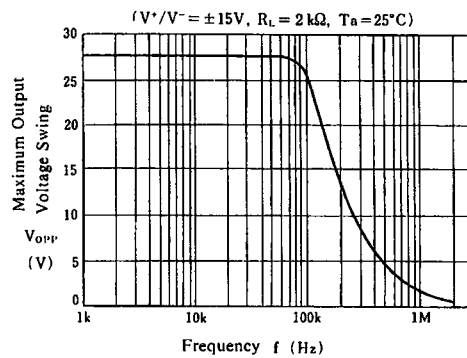


Output Voltage Swing vs. Output Current

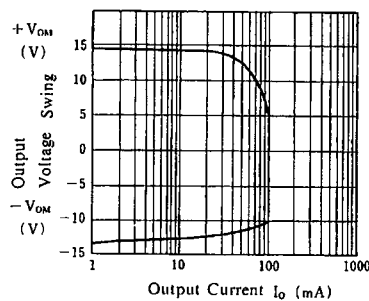


Equivalent Input Noise Voltage vs. Frequency

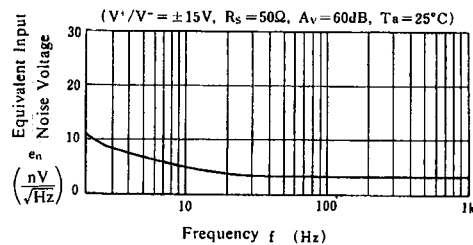


Operating Current vs. Temperature

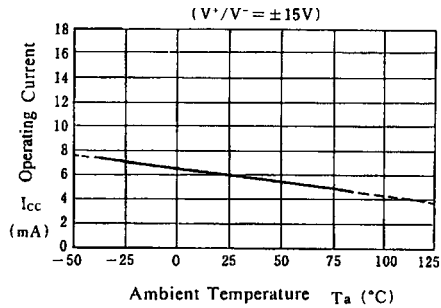


Output Voltage Swing vs. Temperature

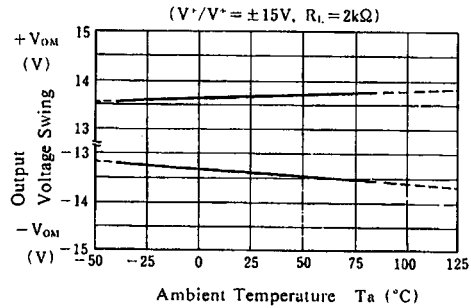


Input Offset Voltage vs. Temperature

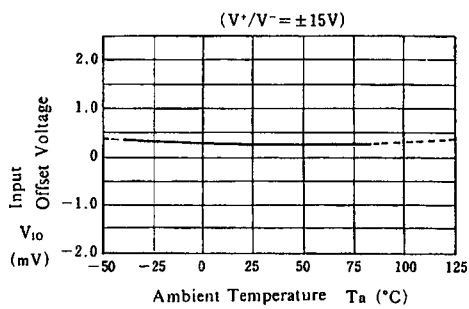


Input Bias Current vs. Temperature

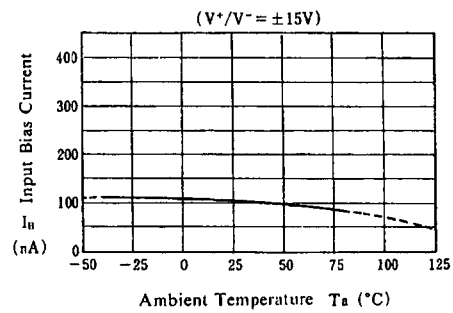


Maximum Output Voltage Swing vs. Operating Voltage

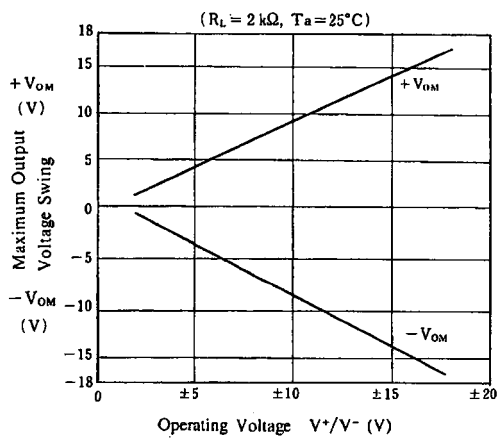


Operating Current vs. Operating Voltage

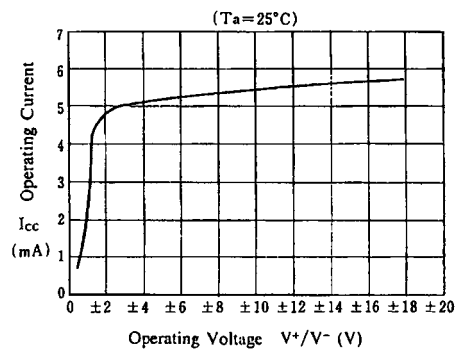

Total Harmonic Distortion vs. Output Voltage

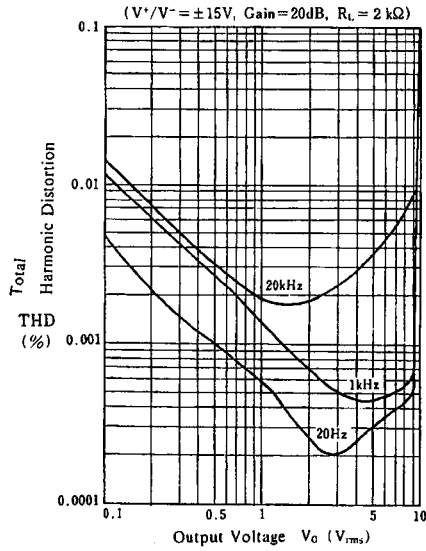

Voltage Gain, Phase vs. Frequency

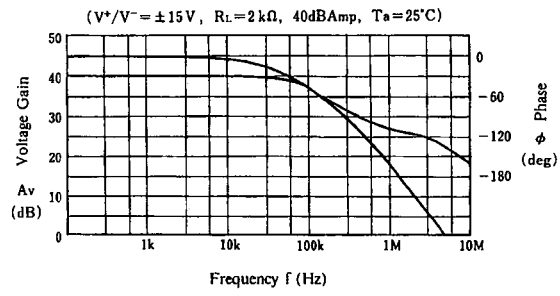

Important statement:

Huaguan Semiconductor Co,Ltd. reserves the right to change the products and services provided without notice. Customers should obtain the latest relevant information before ordering, and verify the timeliness and accuracy of this information.

Customers are responsible for complying with safety standards and taking safety measures when using our products for system design and machine manufacturing to avoid potential risks that may result in personal injury or property damage.

Our products are not licensed for applications in life support, military, aerospace, etc., so we do not bear the consequences of the application of these products in these fields.

Our documentation is only permitted to be copied without any tampering with the content, so we do not accept any responsibility or liability for the altered documents.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Operational Amplifiers - Op Amps](#) category:

Click to view products by [HGSEMI](#) manufacturer:

Other Similar products are found below :

[OPA2991IDSGR](#) [OPA607IDCKT](#) [007614D](#) [633773R](#) [635798C](#) [635801A](#) [702115D](#) [709228FB](#) [741528D](#) [NCV33072ADR2G](#)
[SC2902DTBR2G](#) [SC2903DR2G](#) [SC2903VDR2G](#) [LM258AYDT](#) [LM358SNG](#) [430227FB](#) [430228DB](#) [460932C](#) [AZV831KTR-G1](#) [409256CB](#)
[430232AB](#) [LM2904DR2GH](#) [LM358YDT](#) [LT1678IS8](#) [042225DB](#) [058184EB](#) [070530X](#) [SC224DR2G](#) [SC239DR2G](#) [SC2902DG](#)
[SCYA5230DR2G](#) [714228XB](#) [714846BB](#) [873836HB](#) [MIC918YC5-TR](#) [TS912BIYDT](#) [NCS2004MUTAG](#) [NCV33202DMR2G](#)
[M38510/13101BPA](#) [NTE925](#) [SC2904DR2G](#) [SC358DR2G](#) [LM358EDR2G](#) [AZV358MTR-G1](#) [AP4310AUMTR-AG1](#) [HA1630D02MMEL-E](#)
[NJM358CG-TE2](#) [HA1630S01LPEL-E](#) [LM324AWPT](#) [HA1630Q06TELL-E](#)