


# Sta-Kon®



**T&B Catalog Number:** F4006  
**UPC Number:** 78621072964  
**Description:** Insulated Nylon Ferrule for Wire Size 24, Wire Size 0.25 mm<sup>2</sup>, Length 0.413 inches, Yellow  
**Status:** Active

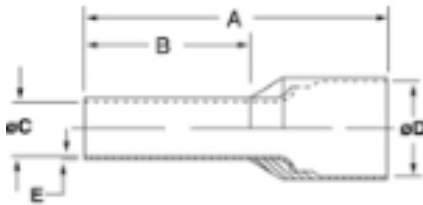

### WEB\_USE

|                               |   |
|-------------------------------|---|
| -T&B Product Line             | 029   |
| -US Cutsheet PDF Catalog Link | <a href="http://www-public.tnb.com/contractor/docs/stakon.pdf">http://www-public.tnb.com/contractor/docs/stakon.pdf</a> |

### Features

|   |   |
|---|---|
| - | Ferrules ensure reliable electrical connections when terminating conductors in screw clamp terminal blocks. |
|---|---|

### General

|                               |                     |
|-------------------------------|---------------------|
| -Ferrule Type                 | Insulated           |
| -Insulation Type              | Insulated Nylon     |
| -Material                     | Copper              |
| -Finish                       | Electro -Tin Plated |
| -Color                        | Yellow              |
| -Wire Range                   | 24                  |
| -Wire Size (mm <sup>2</sup> ) | .25                 |

### Dimension Information

|                      |      |
|----------------------|------|
| -A (mm)              | 10.5 |
| -B (mm)              | 6.0  |
| -Diameter C (inches) | .031 |
| -Diameter C (mm)     | 0.8  |
| -Diameter D (inches) | .079 |
| -Diameter D (mm)     | 2.0  |
| -E (mm)              | .25  |
| -A (inches)          | .413 |
| -B (inches)          | .236 |
| -E (inches)          | .010 |

### Specifications

|                      |           |
|----------------------|-----------|
| -Temperature Rating  | 105°C     |
| -Voltage Rating      | 300V      |
| -Flammability Rating | UL 94 V-2 |

### Tooling

|                    |          |
|--------------------|----------|
| -Application Tools | T3, ERG2 |
| -Recommended Tool  | T3, ERG4 |

### Packaging

|                     |                   |
|---------------------|-------------------|
| -T&B Order Multiple | 500               |
| -T&B Inner Pack     | 500               |
| -Package in Units   | 10000             |
| -T&B Sold in UOM    | Each              |
| -T&B Weight Per UOM | 0.2 lbs. per 1000 |

### Application Support

|                     |                      |
|---------------------|----------------------|
| -T&B Sales Drawings | wsd-000402           |
| -Overview           | Available on Website |

-Wire Guide Tables

Available on Website

### Notes

-

Ferrule dimensions conform to DIN 46228, Part 4.

### Certifications

-RoHS Compliance

Yes

#### For further technical assistance, please contact us...

Thomas & Betts - USA  
8155 T&B Blvd.  
Memphis, TN 38125  
www.tnb.com

T&B Technical Support  
MS 3B-50  
8155 T&B Blvd.  
Memphis, TN 38125

Hours: 7AM - 6PM CDT  
Monday-Friday  
Phone: (888) 862-3289  
Fax: (901) 252-1321  
Email:techsupport@tnb.com

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [abb manufacturer](#):*

Other Similar products are found below :

[TV10-516R](#) [017667013](#) [RF727](#) [2CMA100178R1000](#) [5SDD 92Z0401](#) [ESV14-BS](#) [EZS-21-250](#) [F204AC-40/0.03](#) [F204AC-40/0.1](#) [F362-25/0.03](#) [GJL1211001R0011](#) [GJL1211201R8000](#) [GJL1211501R8000](#) [GJL1213001R0017](#) [GJL1213001R0101](#) [GJL1311001R0101](#) [GJL1311001R8010](#) [GJL1311201R0001](#) [GJL1313001R0011](#) [GJL1313001R0101](#) [GJL1317201R0001](#) [AF09-30-01-11](#) [AF460-30-11-68](#) [1455](#) [EF45-30](#) [ERG297](#) [HSC2-20](#) [1SAM201904R1001](#) [1SAM350000R1003](#) [1SAZ721201R1009](#) [1SAZ721201R1014](#) [1SAZ721201R1025](#) [1SFA611101R1002](#) [1SFA611130R1103](#) [1SFA611131R1101](#) [1SFA611143R1101](#) [1SFA611202R1108](#) [1SFA611203R1108](#) [1SFA611215R1001](#) [1SFA611216R1108](#) [1SFA611285R1002](#) [1SFA611702R6006](#) [1SFA616162R1025](#) [1SFA619100R3015](#) [1SVR730020R0200](#) [IPC4111](#) [OS30FACC12](#) [OS60GJ03](#) [OVR1N160277PS](#) [OXC1L48](#)