


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1					2					3					4				
COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE				
△								△											
△								△											
△								△											

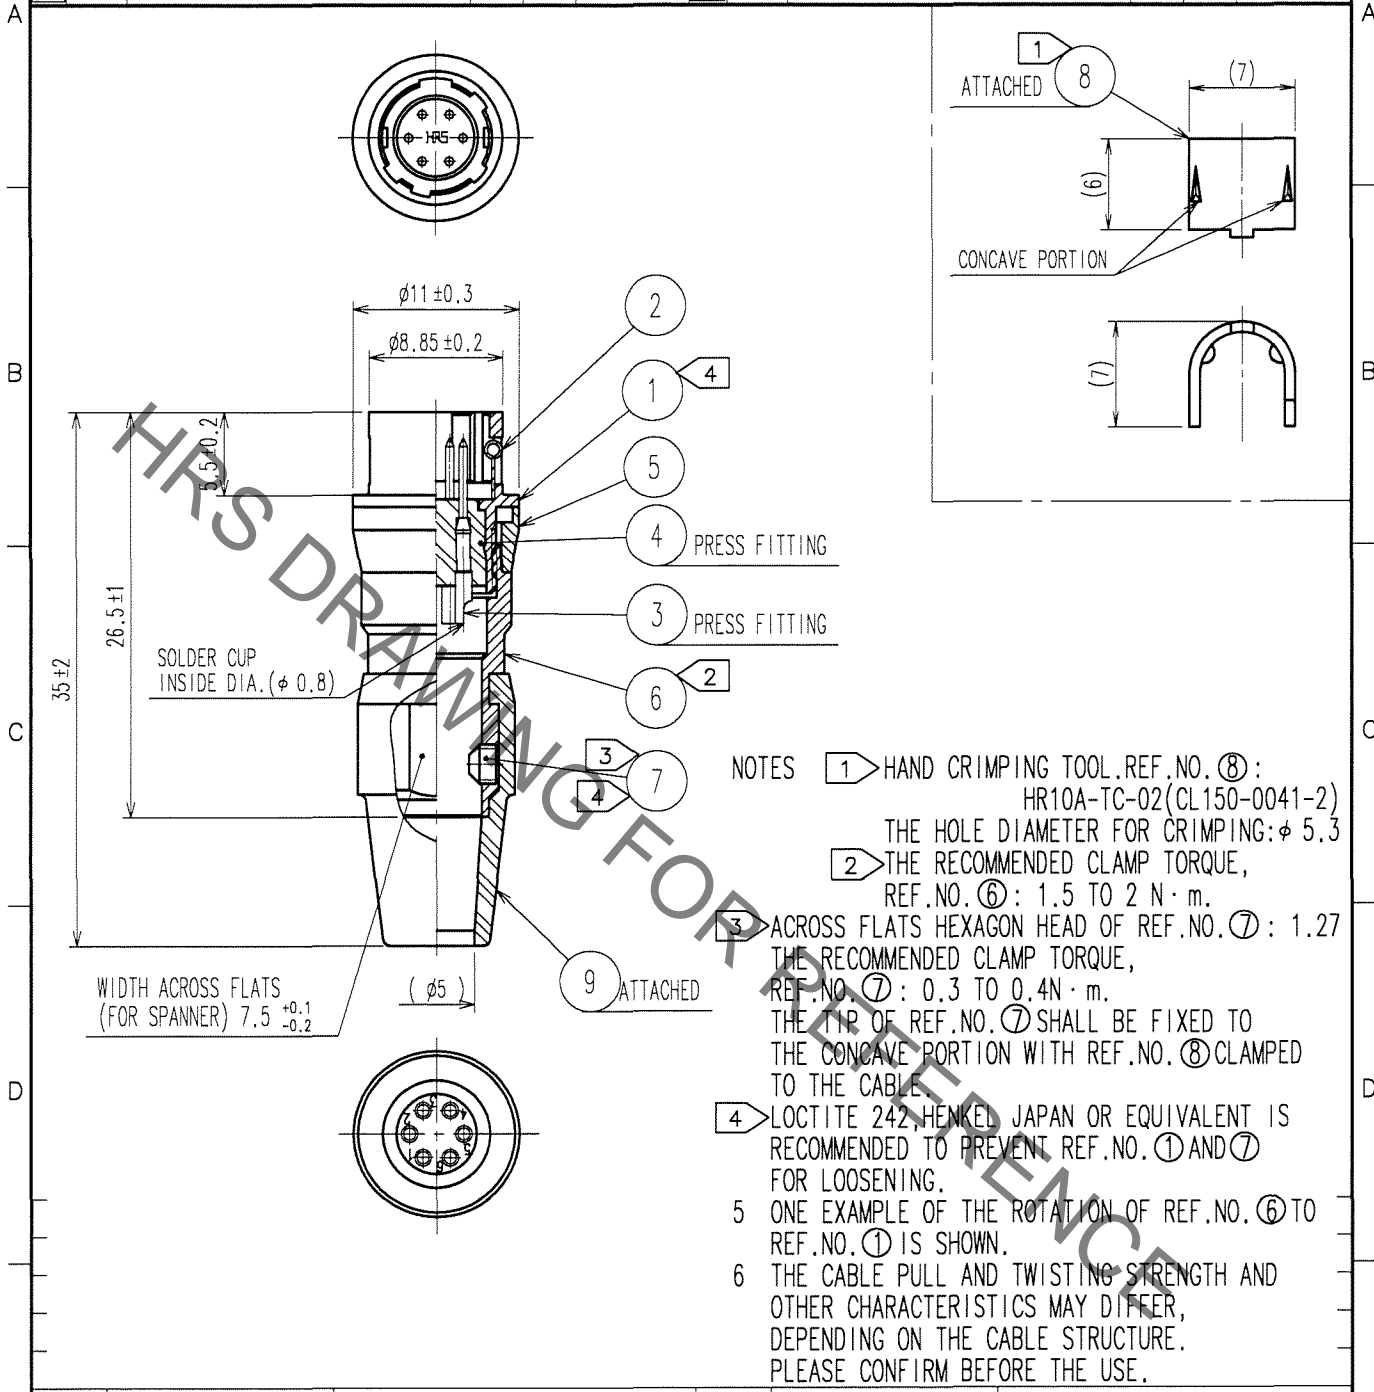

NOTES  
 ① HAND CRIMPING TOOL, REF. NO. ⑧ :  
 HR10A-TC-02 (CL150-0041-2)  
 THE HOLE DIAMETER FOR CRIMPING:  $\phi 5.3$   
 ② THE RECOMMENDED CLAMP TORQUE,  
 REF. NO. ⑥ : 1.5 TO 2 N·m.  
 ③ ACROSS FLATS HEXAGON HEAD OF REF. NO. ⑦ : 1.27  
 THE RECOMMENDED CLAMP TORQUE,  
 REF. NO. ⑦ : 0.3 TO 0.4 N·m.  
 THE TIP OF REF. NO. ⑦ SHALL BE FIXED TO  
 THE CONCAVE PORTION WITH REF. NO. ⑧ CLAMPED  
 TO THE CABLE.  
 ④ LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS  
 RECOMMENDED TO PREVENT REF. NO. ① AND ⑦  
 FOR LOOSENING.  
 5 ONE EXAMPLE OF THE ROTATION OF REF. NO. ⑥ TO  
 REF. NO. ① IS SHOWN.  
 6 THE CABLE PULL AND TWISTING STRENGTH AND  
 OTHER CHARACTERISTICS MAY DIFFER,  
 DEPENDING ON THE CABLE STRUCTURE.  
 PLEASE CONFIRM BEFORE THE USE.

4	POLYAMIDE	(BLACK) UL94V-0	9	CHLOROPRENE RUBBER	(BLACK)
3	BRASS	OVER PLATING: GOLD 0.2μ m min. UNDER PLATING: NICKEL 2μ m min.	8	BRASS	
2	STAINLESS STEEL		7	STEEL	NICKEL PLATING M2.6×0.45×2
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	6	BRASS	MATTE FINISH NICKEL PLATED
			5	BRASS	MATTE FINISH NICKEL PLATED
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL		DRAWN <i>M. Sato</i> 07.03.06	DESIGNED <i>T. Horii</i> 07.03.06	CHECKED <i>M. Sato</i> 07.03.07	APPROVED <i>M. Sato</i> 07.03.07	RELEASED
DRAWING NO. EDC4-020545-74		PART NO. HR10A-7J-6P(74)				
SCALE 2 : 1		CODE NO. CL110-0312-9-74				1/1
UNITS mm		HRS HIROSE ELECTRIC CO., LTD.				

TO
R

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circular Push Pull Connectors](#) category:*

*Click to view products by [Hirose](#) manufacturer:*

Other Similar products are found below :

[6407-249V-11273P](#) [6408-201V-13273](#) [6408-202V-13343](#) [6408-202V-17343](#) [EZG.0B.309.CLN](#) [FFA.2S.310.ZLA](#) [FGA.1B.307.CYCD72Z](#)  
[FGJ.1B.304.CLLD76](#) [FGJ.1B.306.CWLD72](#) [FGJ.3B.304.CYMD10Z](#) [FGJ.3B.304.CYMD82Z](#) [PCS.01.250.DLLE24](#) [PHG.0K.305.CYMC40Z](#)  
[PHG.1K.308.CLLK85](#) [PKG.M0.6BL.LZ](#) [PLC.M1.0SL.LA](#) [GMA.10.290.DN](#) [GMA.3B.090.DA](#) [PRG.M0.6GL.LC52GZ](#) [PSA.1S.275.CTLC66](#)  
[ABF.1S.250.NTA](#) [133020F](#) [1331ER193MZ](#) [1332M107MZ](#) [DTS26Z19-32JA-LC](#) [DTS26Z19-32SA](#) [DTS26Z19-32SA-LC](#) [DTS26Z23-55HA](#)  
[DTS26Z23-55HA-LC](#) [DTS26Z23-55JA-LC](#) [EAJ.1B.306.CWA](#) [ECG.XB.312.CLL](#) [1589430-2](#) [EEA.0B.305.CLN](#) [EEA.0B.309.CLL](#)  
[ELF.00.250.NTL](#) [ERA.01.250.DLL](#) [BRD.0B.200.PCSG](#) [BRR.2S.200.PZVG](#) [HR10A-P](#) [CAH.M34.SLL.C72GZ](#) [CAJ.M34.SLL.C72GZ](#)  
[300500](#) [ESB.00.303.NLL](#) [EXG.0B.309.HLN](#) [FFB.1S.250.CLAC27](#) [FGA.2B.306.CYCD92](#) [FGA.2B.306.CYCD92Z](#) [FGA.XB.312.CLAD72](#)  
[FGJ.1B.302.CYMD62](#)