


NOTE

- 1 IT3D receptacle to be mated and unmated with IT3-300P-\*\*\*H(\*\*).
- 2 Lot no. is marked on top of the connector.
- 3 Minimum clearance for all devices.
- 4 Minimum clearance for sensitive devices.
- 5 More information of this product is available in HIROSE document : ETAD-F0347 "IT3 Design Guideline".
- 6 Maximum coplanarity of the ball field is 0.18mm.
- 7 Please remove the pick up cap (part No.6) from the IT3 connector after reflow soldering.
- 8 The removed pick up cap (part No.6) should not be reused.
- 9 Standard package of 48pcs are packaged in a carton box.
- 10 This product is categorized in the MSL2A of IPC/JEDEC J-STD-020B. It is recommended to use within four weeks, defined by JEDEC, in the office environment after unpacked.
- 11 This product is a solder ball locations and co planarity sensitive BGA connector. It is recommended to handle this product with the automated machine. Solder ball locations and co planarity might be damaged accidentally when it is manually handled by assembly workers.

3	Copper alloy	Contact area : Nickel(1.5µm) + Gold(0.76µm) Other area : Nickel(1.5µm)	6	SUS	PICK UP CAP		
2	LCP	BLACK . UL94V-0	5	HIPS	TRAY, BLACK		
1	LCP	BLACK . UL94V-0	4	TIN	Sn(96.5)-Ag(3)-Cu(0.5)		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
UNITS	mm	SCALE 2:1	REV/COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
			1	REVISED CAP SHAPE	TS. KIKUCHI	TS. MATSUO	09.10.15
APPROVED : T. Matsuo		07/26/2007	DRAWING NO.		EDC3-157108-03		
CHECKED : T. Matsuo		07/26/2007	PART NO.		IT3D-300S-BGA(37)		
DESIGNED : T. Takada		07/26/2007	CODE NO.		CL636-0007-9-37		
DRAWN : T. Takada		07/26/2007					

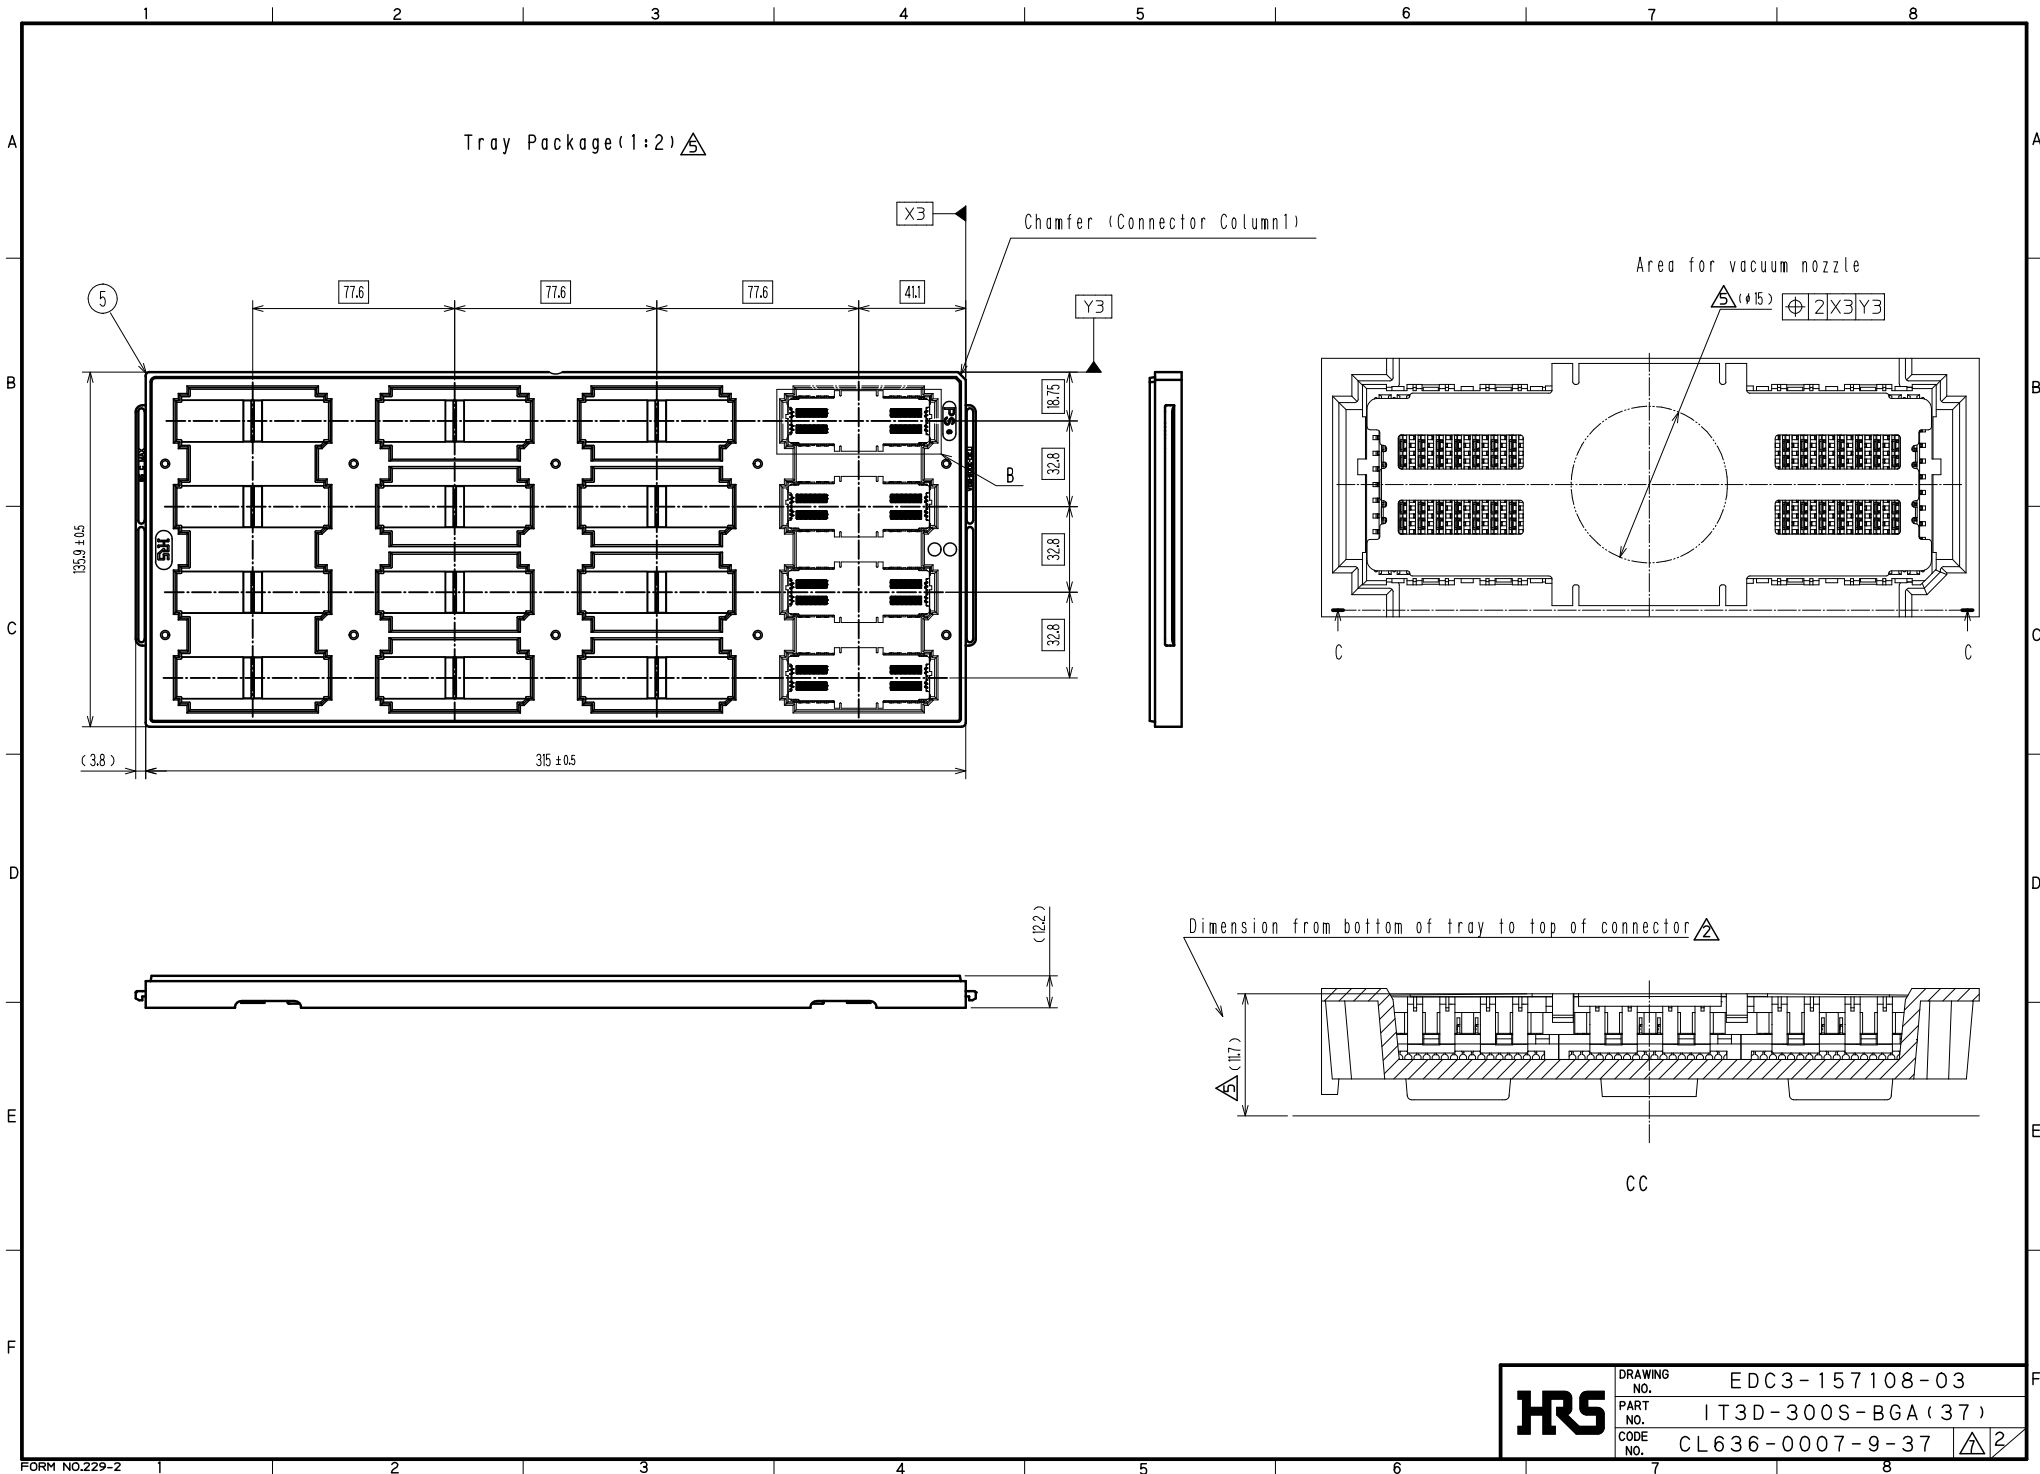

<b>HRS</b>	DRAWING NO.	EDC3-157108-03	$\triangle$ 2
	PART NO.	IT3D-300S-BGA(37)	
	CODE NO.	CL636-0007-9-37	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:*

*Click to view products by [Hirose](#) manufacturer:*

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68682-310LF](#) [68684-306](#) [75140-7012](#) [87471-650](#) [YTW-30-07-H-Q-410-140](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [FCN-268M024-G/3D](#) [FCN-268M036-G/BD](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [AXE816124](#) [AXE720127](#) [354184](#)