


Jun.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

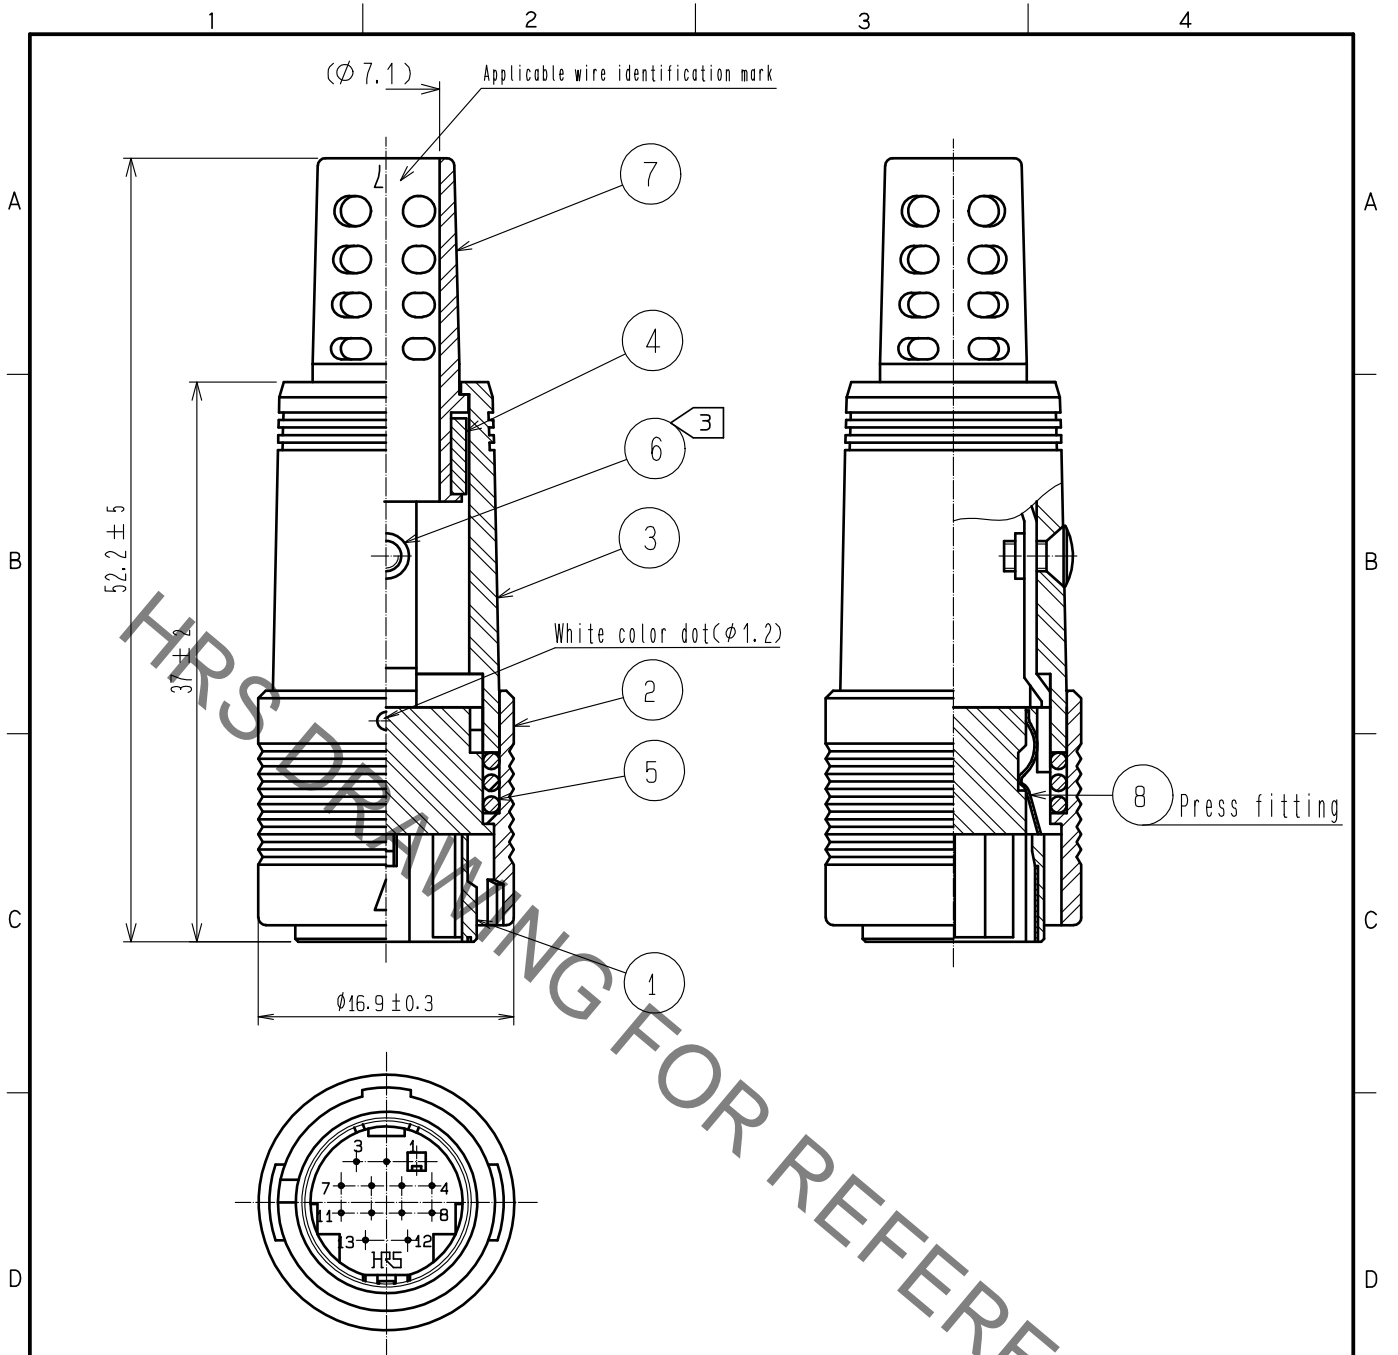

- Notes
- 1 Applicable crimp contact:  
 Contact No.1 to 11 : RP19-PC-222(CL113-0264-7)  
 (Wire range, AWG #24 to 28 , Jacket diameter  $\phi$ 1.15Max.)  
 Contact No.12 to 13 : RP19-PC-212(CL113-0263-4)  
 (Wire range, AWG #18 TO 22 , Jacket diameter  $\phi$ 1.79Max.)
  - 2 Applicable crimp contact crimping tool: RP13A-TC-01(CL150-0070-0)  
 Applicable crimp contact extraction tool: RP6-SC-TP(CL150-0039-0)
  - 3 The recommended clamp torque of Ref.No. ③ to 0.2 N·m.
  - 4 This product is delivered disassembled.
  - 5 The cable clamp strength, rotation strength and other  
 Please confirm before the use.

4	BRASS		8	Stainless steel	
3	POLYCARBONATE	(BLACK) UL94V-0	7	Flexible polyvinylchloride	(BLACK) UL94V-0
2	POLYCARBONATE	(BLACK) UL94V-0	6	BRASS	ZINC PLATING BLACK CHROMETE TREATMENT (TRIVALENT CHROMIUM) JIS B 1111 M2X0.4X4
1	POLYCARBONATE	(BLACK) UL94V-0	5	STEEL	NICKEL PLATING
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm	SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
<b>HRS</b> HIROSE ELECTRIC CO., LTD.			APPROVED :EJ. KUNII 16.03.23 CHECKED :EJ. KUNII 16.03.23 DESIGNED :MM. ISHII 16.03.23 DRAWN :MM. ISHII 16.03.23	DRAWING NO. EDC-028107-71-00 PART NO. RP13A-12PK-13PC(71) CODE NO. CL113-4006-3-71	1/1	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circular Push Pull Connectors](#) category:*

*Click to view products by [Hirose](#) manufacturer:*

Other Similar products are found below :

[6407-249V-11273P](#) [6408-201V-13273](#) [6408-202V-13343](#) [6408-202V-17343](#) [EZG.0B.309.CLN](#) [FFA.2S.310.ZLA](#) [FGA.1B.307.CYCD72Z](#)  
[FGJ.1B.304.CLLD76](#) [FGJ.1B.306.CWLD72](#) [FGJ.2B.302.CYMD82Z](#) [FGJ.2B.310.CYMD72Z](#) [FGJ.3B.304.CYMD10Z](#)  
[FGJ.3B.304.CYMD82Z](#) [FHJ.2B.310.CLLD72](#) [PCS.01.250.DLLE24](#) [PHG.0K.305.CYMC40Z](#) [PHG.1K.308.CLLK85](#) [PKG.M0.6BL.LZ](#)  
[PLC.M1.0SL.LA](#) [GMA.10.290.DN](#) [GMA.3B.090.DA](#) [PRG.M0.6GL.LC52GZ](#) [PSA.1S.275.CTLC66](#) [ABF.1S.250.NTA](#) [133020F](#)  
[1331ER193MZ](#) [1332M107MZ](#) [DTS26Z19-32JA-LC](#) [DTS26Z19-32SA](#) [DTS26Z19-32SA-LC](#) [DTS26Z23-55HA](#) [DTS26Z23-55HA-LC](#)  
[DTS26Z23-55JA-LC](#) [EAJ.1B.306.CWA](#) [ECG.XB.312.CLL](#) [1589430-2](#) [EEA.0B.305.CLN](#) [EEA.0B.309.CLL](#) [ELF.00.250.NTL](#)  
[ERA.01.250.DLL](#) [BRD.0B.200.PCSG](#) [BRR.2S.200.PZVG](#) [HR10A-P](#) [CAH.M34.SLL.C72GZ](#) [CAJ.M34.SLL.C72GZ](#) [300500](#)  
[ESB.00.303.NLL](#) [EXG.0B.309.HLN](#) [FFB.1S.250.CLAC27](#) [FFG.1B.306.CLAZ](#)