
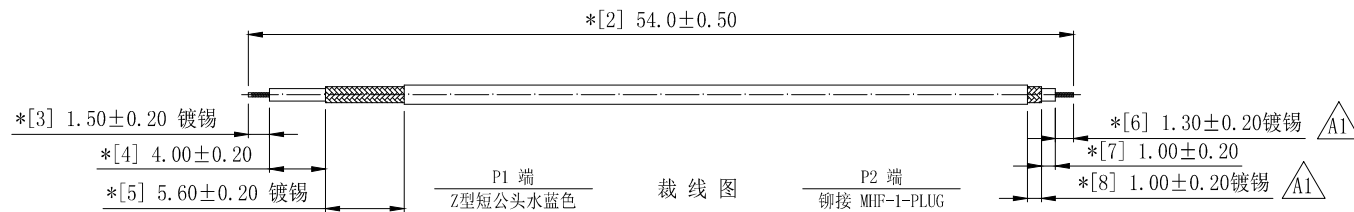


REVISION	DESCRIPTION	DATE	DRAFTER
A0	FIRST RELEASED	19. 10. 11	Mark
A1	打端子处的线端要沾锡	20. 10. 16	S. He

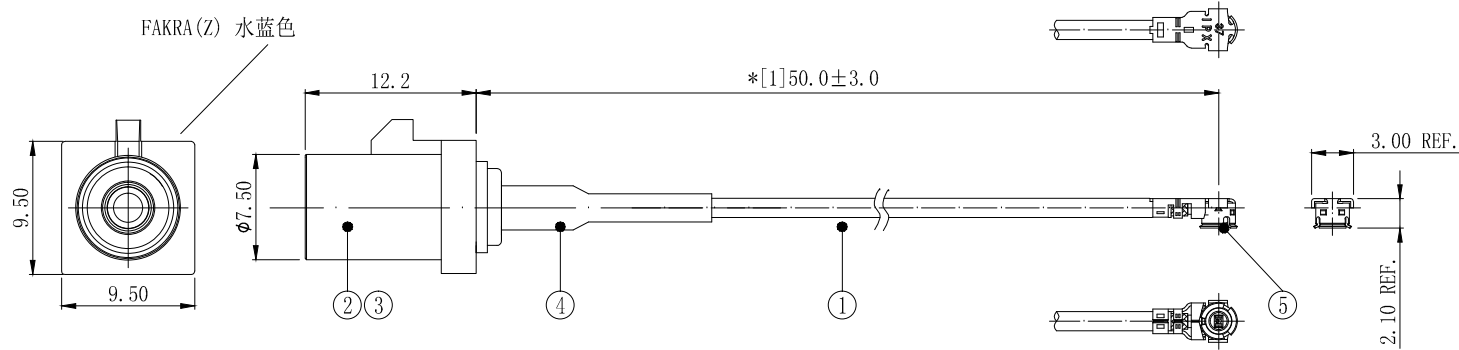

技术要求:

- 方向要求: 无方向要求。  
工艺要求: 编织与尾管环焊。
- 电气特性: 特性阻抗: 50Ω, 适用频率范围: DC-6GHz;
- 断短路与高压测试: 100%使用线材综合测试仪测试。  
测试条件: 断短路判定值: 2kΩ; 直流导通电阻: 最大2.00Ω; 绝缘电阻: DC 300V, 0.05秒, 50MΩ。
- 拔出力测试: FAKRA端拉力>3.5Kgf/端子端拉力>1.8Kgf。  
测试方法: 沿电缆中心轴, 以25±3毫米/分钟的速度, 垂直将3.50kg砝码提高桌面即为合格, 反之不合格。
- 尺寸检验: [\*]为FAI检测项目; \*为重点检测项目; ■为CPK管制项目。
- 外观检验: 目视全检。产品表面不得有刮伤、破损和脏污; 镀层色泽光亮均匀, 不得有氧化。
- 包装规范: 25PCS/扎, 5扎/包, 即100PCS/包。
- 环保要求: 产品及其使用之物料皆需要符合RoHS要求。

5	2LM10P137010	1.37一代线端 (外购原厂)	1	---
4	2TA025BK1-015	黑色热缩套管, ∅2.5*15.0	1	---
3	2LC01PM601-5	公针 L=8.6*1.2.8*∅0.52+∅1.03*∅0.96*∅0.6	1	---
2	2LC01PM601-4	FAKRA Z型短体公头 水蓝色	1	---
1	2LM10P137114	∅1.37黑色银锡线-50 OHM	1	依裁线图裁线
No.	PART NUMBER	PART NAME & DESCRIPTION	Q' TY	REMARKS

GENERAL TOLERANCE:

LINEAR:	
X	±1.00
X.X	±0.50
X.XX	±0.30
X.XXX	±0.20
ANGLE:	
X°	±4.00°
X.X°	±3.00°
X.XX°	±2.00°
X.XXX°	±1.00°

HJ-Tech 东莞市皇捷通讯科技有限公司

FILE NAME:	产品图	TITLE:	射频电缆组件
ENG/DATE:	Mark/19. 10. 11	FAKRA Z短头公头公针 (水蓝色) TO MHF PLUG, 1.37黑色线 外露线长L=50mm	
CHE/DATE:		P/N:	HJ-FAKRA Z-1.37-IPEX-L=50mm
APP/DATE:		UNIT:	mm
SCALE:	1:1	REVISION:	A2
		SHEET:	1/1

COMPLIANCE WITH THE REQUIREMENT: ■RoHS; □ HF; □ SONY SS-00259; □ OTHERS  
\*NO USING ESTRICTED AND BANNED SUBSTANCE

H499

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Antenna Accessories](#) category:*

*Click to view products by [HJ Technology](#) manufacturer:*

Other Similar products are found below :

[AN102800V1](#) [HKIT-MTA9101-001](#) [YMST4](#) [CC.001](#) [NMOHPCN518](#) [MB830](#) [MB825](#) [MB820](#) [LBT3800](#) [GRO](#) [172-00006](#) [W9909](#) [HKIT-MTA9100-001](#) [MABT8UM9](#) [HKIT-LPx-001](#) [QWRCB](#) [GPS-17519](#) [76002093](#) [G8SMI](#) [MABT8M](#)  
[DELTA/MAGMOUNT/SMAFRP/SMAMRP/1M/19](#) [DELTA/MAGMOUNT/SMAFRP/SMAMRP/2M/19](#) [1.13-SMA-L=200mm](#) [1.13-SMA-L=300mm](#) [1.13-SMA-MHF-1](#) [PLUG-L=750mm](#) [FM2](#) [NS1535](#) [NS3035](#) [MB8](#) [HS34RB](#) [W9908](#) [SR4G031-150](#) [LBTB3400](#) [LBM9034](#)  
[GBR8PI](#) [GB8](#) [G8PI](#) [BPXPHK](#) [ALLPMTP](#) [ALLPMTA](#) [LTE Antenna Kit](#) [SR4W030-150](#) [GPSMBMM](#) [2740504](#) [SR4G031-100](#) [2702198](#)  
[SR4W030-100](#) [9091.99.0235](#) [LoRa Antenna](#) [EZ19](#)