


### General Description

The AOD3N50 & AOU3N50 have been fabricated using an advanced high voltage MOSFET process that is designed to deliver high levels of performance and robustness in popular AC-DC applications. By providing low  $R_{DS(on)}$ ,  $C_{iss}$  and  $C_{rss}$  along with guaranteed avalanche capability these parts can be adopted quickly into new and existing offline power supply designs.

### Product Summary

$V_{DS}$	600V@150°C
$I_D$ (at $V_{GS}=10V$ )	2.8A
$R_{DS(ON)}$ (at $V_{GS}=10V$ )	< 3Ω

100% UIS Tested!  
100%  $R_g$  Tested!

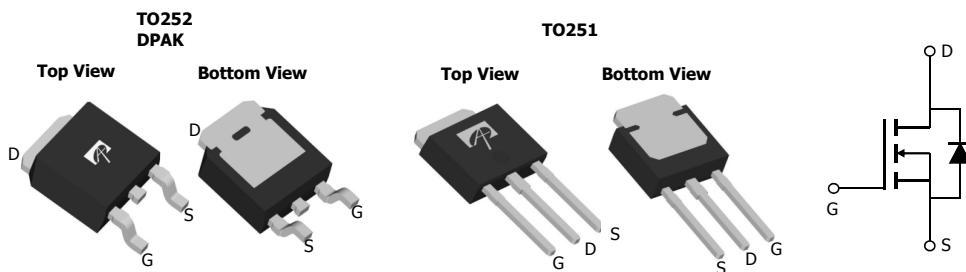

### Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Maximum	Units
Drain-Source Voltage	$V_{DS}$	500	V
Gate-Source Voltage	$V_{GS}$	$\pm 30$	V
Continuous Drain Current <sup>B</sup>	$I_D$	2.8	A
$T_C=100^\circ\text{C}$		1.8	
Pulsed Drain Current <sup>C</sup>	$I_{DM}$	9	
Avalanche Current <sup>C</sup>	$I_{AR}$	2	A
Repetitive avalanche energy <sup>C</sup>	$E_{AR}$	60	mJ
Single pulsed avalanche energy <sup>H</sup>	$E_{AS}$	120	mJ
MOSFET dv/dt ruggedness	dv/dt	50	V/ns
Peak diode recovery dv/dt		5	
Power Dissipation <sup>B</sup>	$P_D$	57	W
$T_C=25^\circ\text{C}$		0.45	W/ °C
Junction and Storage Temperature Range	$T_J, T_{STG}$	-50 to 150	°C
Maximum lead temperature for soldering purpose, 1/8" from case for 5 seconds	$T_L$	300	°C

### Thermal Characteristics

Parameter	Symbol	Typical	Maximum	Units
Maximum Junction-to-Ambient <sup>A,G</sup>	$R_{\theta JA}$	45	55	°C/W
Maximum Case-to-sink <sup>A</sup>	$R_{\theta CS}$	-	0.5	°C/W
Maximum Junction-to-Case <sup>D,F</sup>	$R_{\theta JC}$	1.8	2.2	°C/W

**Electrical Characteristics ( $T_J=25^\circ\text{C}$  unless otherwise noted)**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>STATIC PARAMETERS</b>						
$BV_{DSS}$	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}, V_{GS}=0\text{V}, T_J=25^\circ\text{C}$	500			V
		$I_D=250\mu\text{A}, V_{GS}=0\text{V}, T_J=150^\circ\text{C}$		600		
$BV_{DSS}/\Delta T_J$	Zero Gate Voltage Drain Current	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$		0.54		$\text{V}/^\circ\text{C}$
		$V_{DS}=500\text{V}, V_{GS}=0\text{V}$			1	
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS}=400\text{V}, T_J=125^\circ\text{C}$			10	$\mu\text{A}$
		$V_{DS}=0\text{V}, V_{GS}=\pm 30\text{V}$			$\pm 100$	
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{DS}=5\text{V}, I_D=250\mu\text{A}$	3.5	4.1	4.5	V
$R_{DS(\text{ON})}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}, I_D=1.5\text{A}$		2.3	3	$\Omega$
$g_{FS}$	Forward Transconductance	$V_{DS}=40\text{V}, I_D=1.5\text{A}$		2.8		S
$V_{SD}$	Diode Forward Voltage	$I_S=1\text{A}, V_{GS}=0\text{V}$		0.78	1	V
$I_S$	Maximum Body-Diode Continuous Current				3	A
$I_{SM}$	Maximum Body-Diode Pulsed Current				9	A
<b>DYNAMIC PARAMETERS</b>						
$C_{iss}$	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=25\text{V}, f=1\text{MHz}$	221	276	331	pF
$C_{oss}$	Output Capacitance		25	31.4	38	pF
$C_{rss}$	Reverse Transfer Capacitance		2.1	2.6	4.1	pF
$R_g$	Gate resistance	$V_{GS}=0\text{V}, V_{DS}=0\text{V}, f=1\text{MHz}$	1.9	3.9	5.9	$\Omega$
<b>SWITCHING PARAMETERS</b>						
$Q_g$	Total Gate Charge	$V_{GS}=10\text{V}, V_{DS}=400\text{V}, I_D=3\text{A}$		6.7	8.0	nC
$Q_{gs}$	Gate Source Charge			1.7	3.0	nC
$Q_{gd}$	Gate Drain Charge			2.7	3.2	nC
$t_{D(\text{on})}$	Turn-On Delay Time	$V_{GS}=10\text{V}, V_{DS}=250\text{V}, I_D=3\text{A}, R_G=25\Omega$		11	13.2	ns
$t_r$	Turn-On Rise Time			19	23.0	ns
$t_{D(\text{off})}$	Turn-Off Delay Time			20.5	24.6	ns
$t_f$	Turn-Off Fall Time			15	18.0	ns
$t_{rr}$	Body Diode Reverse Recovery Time	$I_F=3\text{A}, dI/dt=100\text{A}/\mu\text{s}, V_{DS}=100\text{V}$		134	161	ns
$Q_{rr}$	Body Diode Reverse Recovery Charge	$I_F=3\text{A}, dI/dt=100\text{A}/\mu\text{s}, V_{DS}=100\text{V}$		0.89	1.1	$\mu\text{C}$

- A. The value of  $R_{QJA}$  is measured with the device in a still air environment with  $T_A=25^\circ\text{C}$ .
- B. The power dissipation  $P_D$  is based on  $T_{J(\text{MAX})}=150^\circ\text{C}$  in a TO252 package, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.
- C. Repetitive rating, pulse width limited by junction temperature  $T_{J(\text{MAX})}=150^\circ\text{C}$ .
- D. The  $R_{QJA}$  is the sum of the thermal impedance from junction to case  $R_{QJC}$  and case to ambient.
- E. The static characteristics in Figures 1 to 6 are obtained using  $<300\ \mu\text{s}$  pulses, duty cycle 0.5% max.
- F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of  $T_{J(\text{MAX})}=150^\circ\text{C}$ .
- G. These tests are performed with the device mounted on 1 in<sup>2</sup> FR-4 board with 2oz. Copper, in a still air environment with  $T_A=25^\circ\text{C}$ .
- H. L=60mH,  $I_{AS}=2\text{A}$ ,  $V_{DD}=150\text{V}$ ,  $R_G=10\Omega$ , Starting  $T_J=25^\circ\text{C}$

APPLICATIONS OR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.



## TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

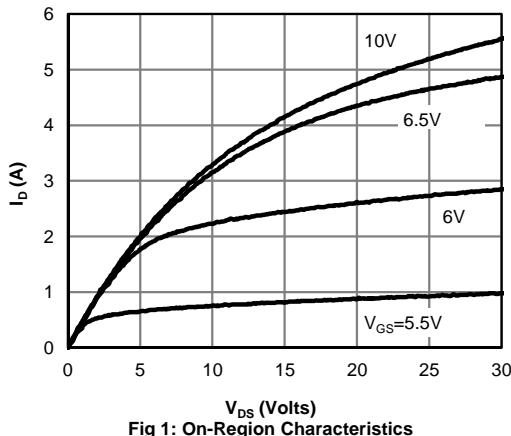


Fig 1: On-Region Characteristics

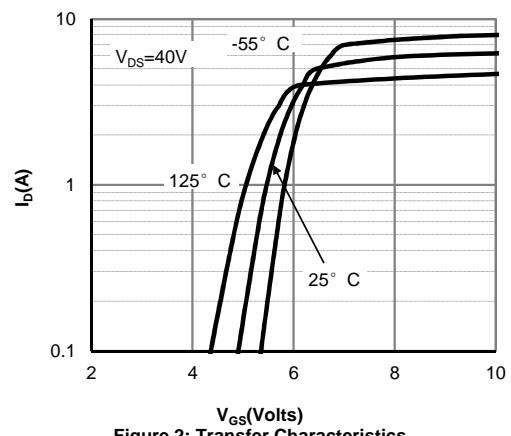


Figure 2: Transfer Characteristics

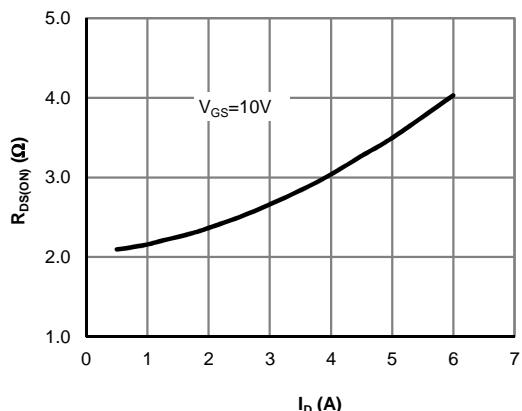


Figure 3: On-Resistance vs. Drain Current and Ga  
Voltage

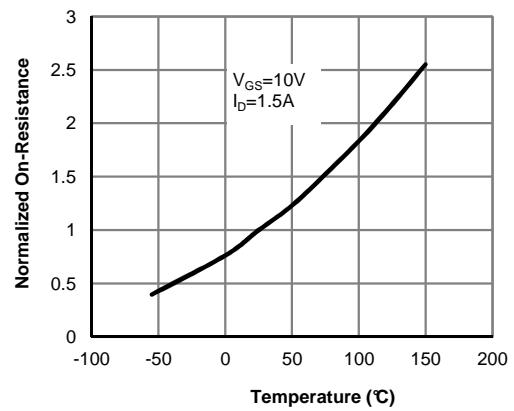


Figure 4: On-Resistance vs. Junction Temperature

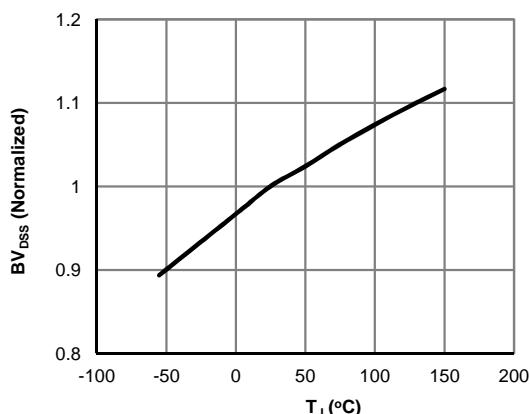


Figure 5: Break Down vs. Junction Temperature

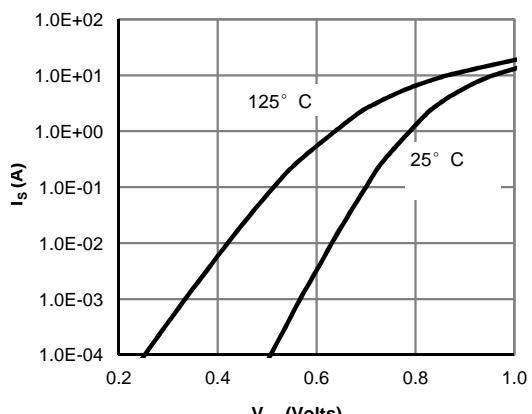


Figure 6: Body-Diode Characteristics

## TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

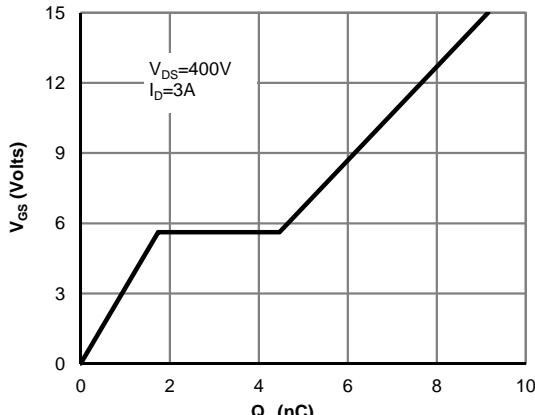


Figure 7: Gate-Charge Characteristics

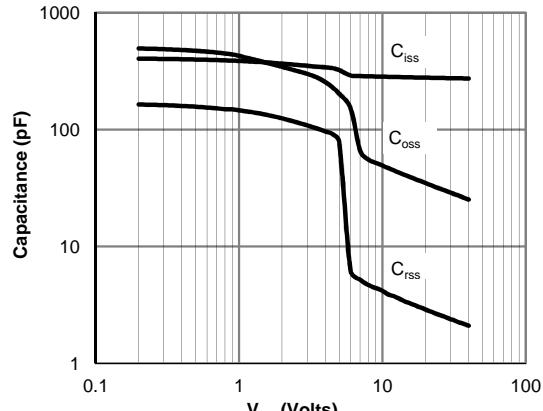


Figure 8: Capacitance Characteristics

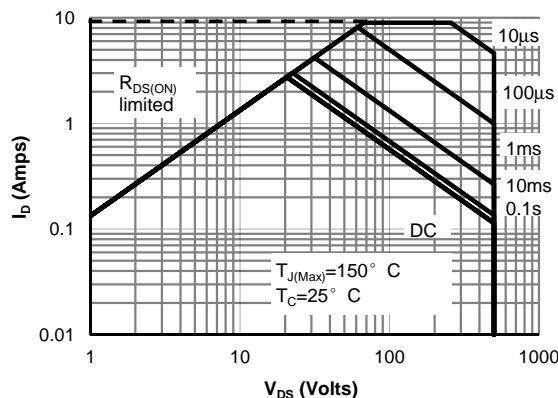


Figure 9: Maximum Forward Biased Safe Operating Area (Note F)

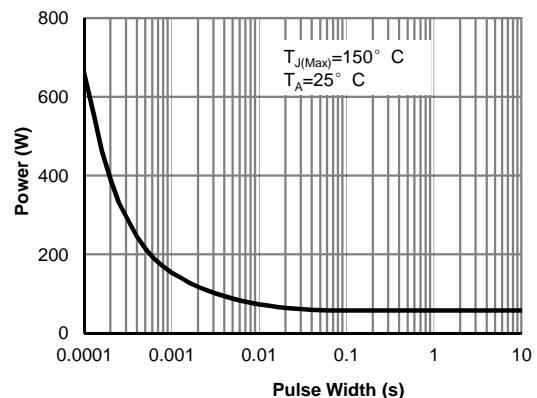


Figure 10: Single Pulse Power Rating Junction-to-Case (Note F)

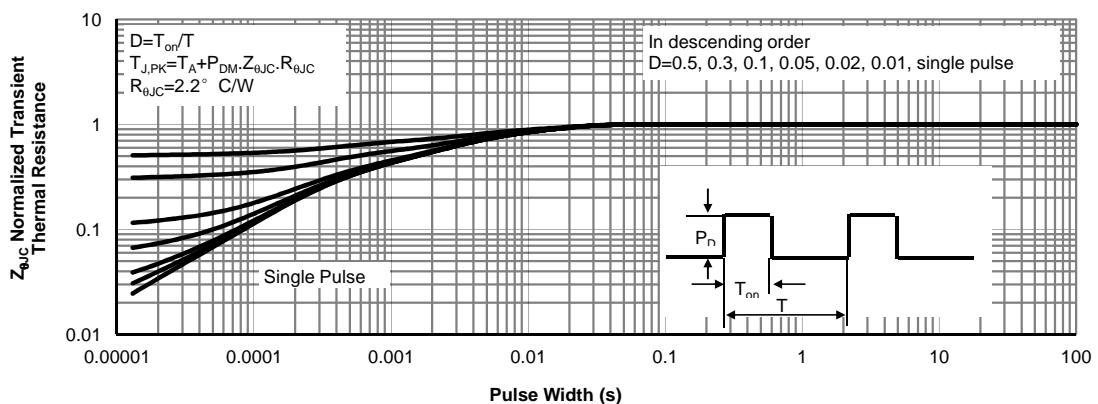


Figure 11: Normalized Maximum Transient Thermal Impedance (Note F)

## TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

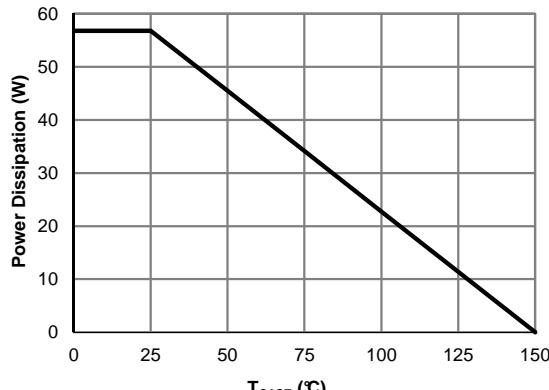


Figure 12: Power De-rating (Note B)

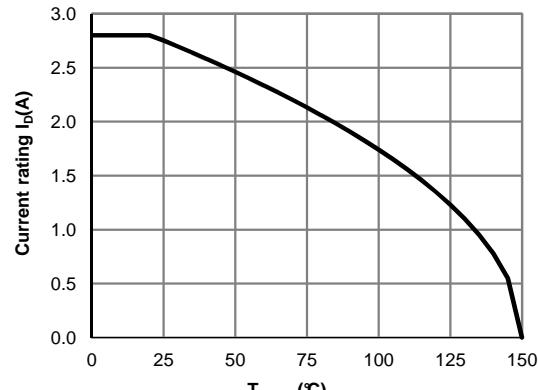


Figure 13: Current De-rating (Note B)

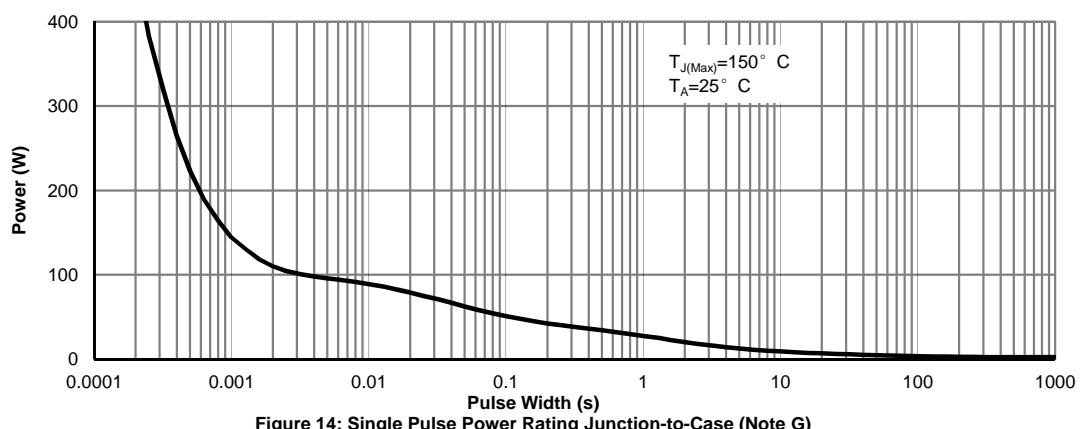


Figure 14: Single Pulse Power Rating Junction-to-Case (Note G)



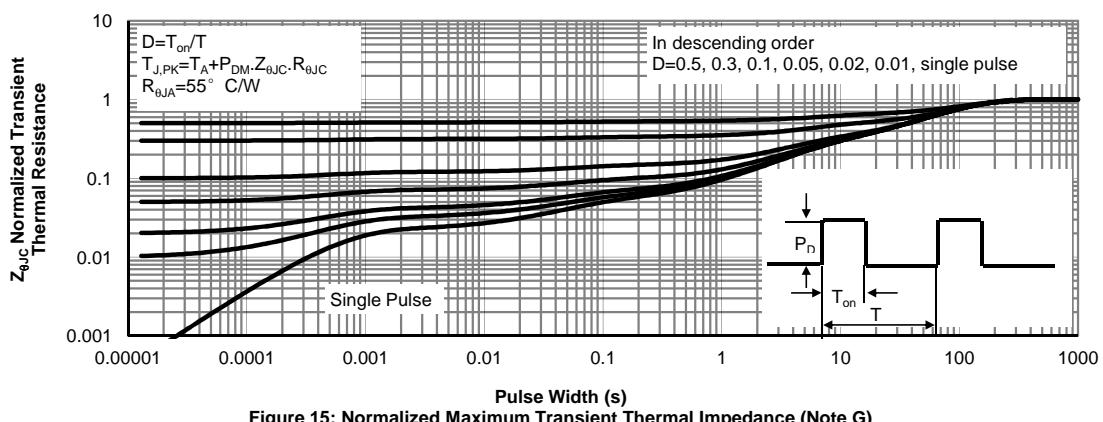


Figure 15: Normalized Maximum Transient Thermal Impedance (Note G)


Gate Charge Test Circuit & Waveform

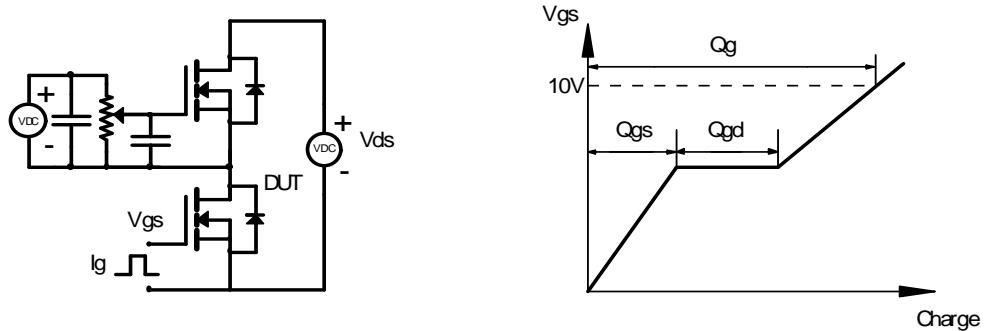


Resistive Switching Test Circuit & Waveforms

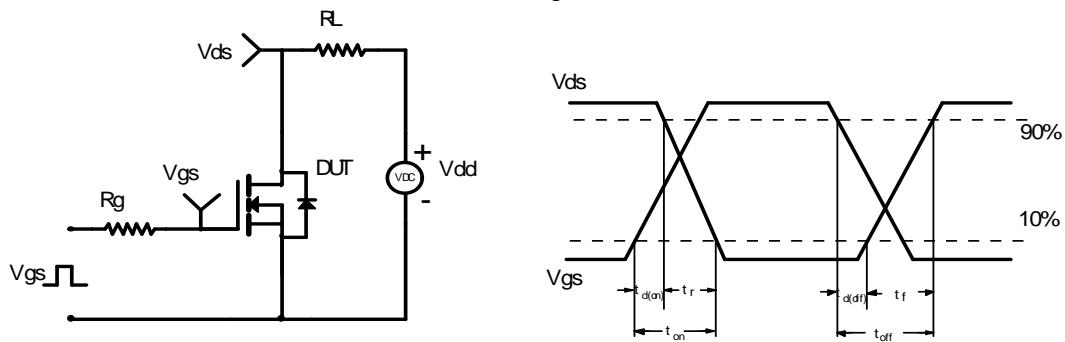

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

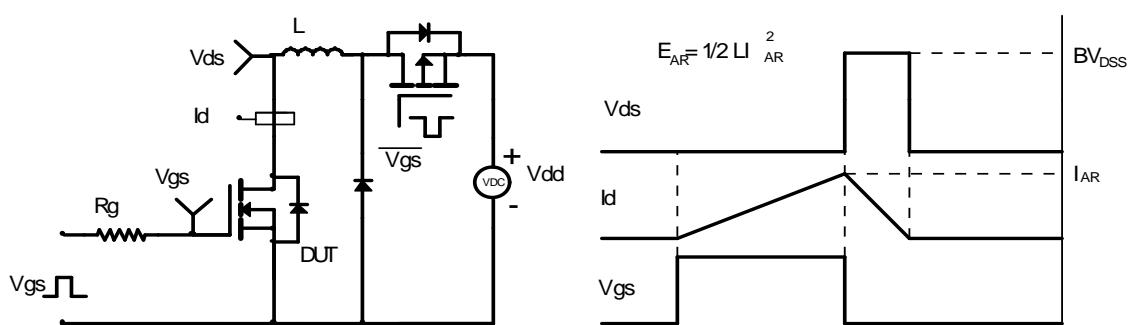

Diode Recovery Test Circuit & Waveforms

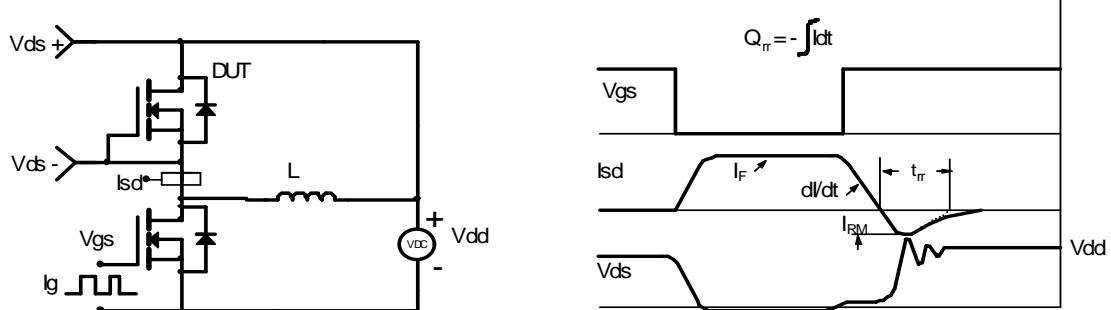

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for MOSFET category:***

***Click to view products by Alpha & Omega manufacturer:***

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)  
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)  
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)  
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)  
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)  
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)