



Interactive Catalog Replaces Catalog Pages

Honeywell Sensing and Control has replaced the PDF product catalog with the new [Interactive Catalog](#). The [Interactive Catalog](#) is a power search tool that makes it easier to find product information. It includes more installation, application, and technical information than ever before.



**Click this icon to try the new
Interactive Catalog.**

Sensing and Control
Honeywell Inc.
11 West Spring Street
Freeport, Illinois 61032




- HVAC – 100 mil, duct and refrigerant equipment
- Instrument and probe assemblies
- Electronic assemblies – temperature compensation
- Process control – temperature regulation

1170-1000-01, 0.050 alpha version, provides 10x greater sensitivity and signal-to-noise. The 0.050" lead space models are ideal for probes.

ORDER GUIDE

HEL-775-A	Ceramic SIP pkg. 0.100" lead spacing
HEL-775-B	Ceramic SIP pkg. 0.050" lead spacing
-U	1000 Ω , 0.00375 $\Omega/\Omega^{\circ}\text{C}$
-T	100 Ω , 0.00385 $\Omega/\Omega^{\circ}\text{C}$, DIN specification
-0	$\pm 0.2\%$ Resistance Trim (Standard)
-1	$\pm 0.1\%$ Resistance Trim (Optional)

MOUNTING DIMENSIONS (for reference only) mm/in.

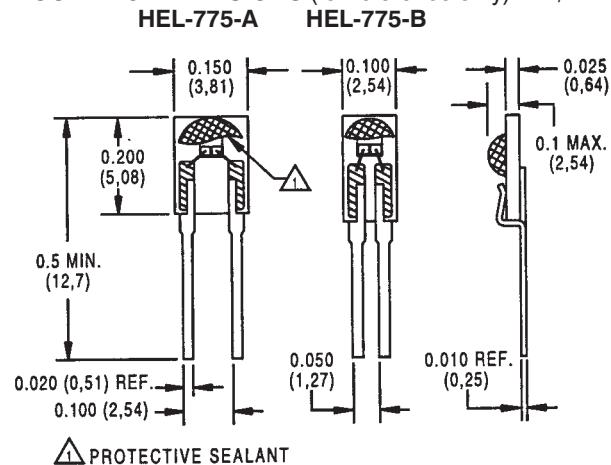

CAUTION PRODUCT DAMAGE

The inherent design of this component causes it to be sensitive to electrostatic discharge (ESD). To prevent ESD-induced damage and/or degradation, take normal ESD precautions when handling this product.

Fig. 1: Wheatstone Bridge 2-Wire Interface

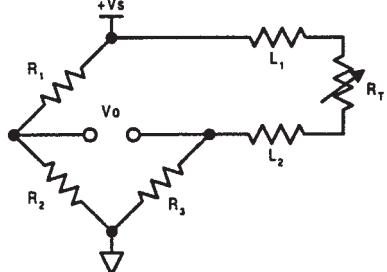


Fig. 2: Linear Output Voltage


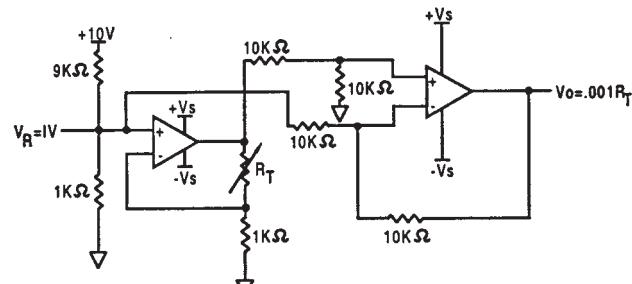


Fig. 3: Adjustable Point (Comparator) Interface

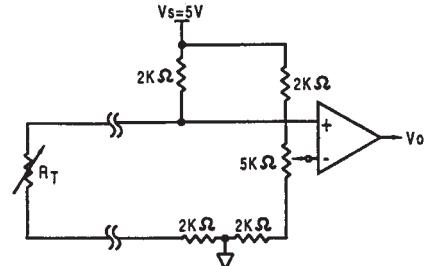

Temperature


	± 0.000025	± 0.000015
Delta, δ ($^{\circ}$C)	1.605 ± 0.009	1.4999 ± 0.007
Beta, β ($^{\circ}$C)	0.16	0.10863
A ($^{\circ}$C$^{-1}$)	3.81×10^{-3}	3.908×10^{-3}
B ($^{\circ}$C2)	-6.02×10^{-7}	-5.775×10^{-7}
C ($^{\circ}$C4)	-6.0×10^{-12}	-4.183×10^{-12}

Both $\beta = 0$ and $C = 0$ for $T > 0^{\circ}$ C

200	5.6	1.6	4.3	1.2
300	8.2	2.4	6.2	1.8
400	11.0	3.2	8.3	2.5
500	12.5	4.0	9.6	3.0
600	15.1	4.8	10.4	3.3

* 1000Ω RTD. Divide ΔR by 10 for 100Ω RTD.

RESISTANCE VS TEMPERATURE CURVE

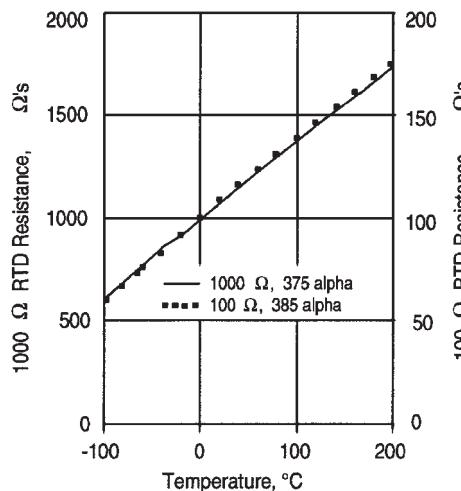

SPECIFICATIONS

Sensor Type	Thin film platinum RTD: $R_0 = 1000 \Omega$ @ 0° C; $\alpha = 0.00375 \Omega/\Omega/{}^{\circ}$ C $R_0 = 100 \Omega$ @ 0° C; $\alpha = 0.00385 \Omega/\Omega/{}^{\circ}$ C
Temperature Range	-55° to $+150^{\circ}$ C (-67° to $+302^{\circ}$ F)
Temperature Accuracy	$\pm 0.5^{\circ}$ C or 0.8% of temperature, $^{\circ}$ C ($R_0 \pm 0.2\%$ trim), whichever is greater $\pm 0.3^{\circ}$ C or 0.6% of temperature, $^{\circ}$ C ($R_0 \pm 0.1\%$ trim), whichever is greater (optional)
Base Resistance and Interchangeability, $R_0 \pm \Delta R_0$	$1000 \pm 2 \Omega$ ($\pm 0.2\%$) @ 0° C or $100 \pm 0.2 \Omega$ ($\pm 0.2\%$) @ 0° C $1000 \pm 1 \Omega$ ($\pm 0.1\%$) @ 0° C or $100 + 0.2 \Omega$ ($+0.2\%$) @ 0° C (optional)
Linearity	$\pm 0.15\%$ of full scale for temperatures spanning -55° to 150° C
Time Constant	<10 sec. in air at 10 ft./sec.
Operating Current	1 mA maximum in still air for $<0.3^{\circ}$ C (0.5°F) self heating
Stability	< 0.05° C per 5 years in occupied environments
Self Heating	
HEL-775-A	9.7mW/ $^{\circ}$ C nominal in air at 10ft/sec, 4.3mW/ $^{\circ}$ C nominal in enclosed still air
HEL-775-B	6.8mW/ $^{\circ}$ C nominal in air at 10ft/sec, 3.0mW/ $^{\circ}$ C nominal in enclosed still air
Insulation Resistance	>50 M Ω @ 50 VDC @ 25° C
Construction	Alumina substrate with epoxy protection
Lead Material	Phosphor bronze with bright tin lead 60/40 plating
Lead Configuration	2-wire

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Industrial Temperature Sensors category:

Click to view products by Honeywell manufacturer:

Other Similar products are found below :

[590-32AC34-103-WRI](#) [590-59CN02-103](#) [A1004SG22P0](#) [HEL-736-U-2-36](#) [G9864ST22F0](#) [HEL-717-U-0-24-00](#) [R-8203](#) [519-39AW09-245](#)
[519-39CH01-295](#) [521-43BC01-202](#) [535-34AE08-303](#) [512-32AQ01-503](#) [521-33AG04-303](#) [521-53BR01-503](#) [E52P6DY4M](#) [535-34AE09-222](#)
[590-32AC34-103](#) [590-32AD05-103](#) [E52-P6DY 2M](#) [A1004SX22P0](#) [E52-P20C-N D=8](#) [E52-THE5A 100-200 2M](#) [T200-C32-M14-C](#) [HRTS-5760-B-T-0-18](#) [IOT-9CLT](#) [IOT-9CLT-2](#) [IOT-9CLT-8](#) [LTPCTGA20MBSIBX01](#) [LTPCTFA30MBSITX01](#) [LTPCTFA20MBSIDX01](#)
[LTPCTAA20MDSIEX01](#) [BB-HS-104T2505402](#) [NCP81255MNTXG](#) [HEL-707-T-1-24-00](#) [HEL-716-U-0-24-00](#) [A-2142](#) [USW2247](#) [R-11614-1](#) [RP103ST22P2](#) [R-10331-3F6](#) [E52-P20AY-D32 4M](#) [89750186](#) [79696038](#) [79696039](#) [A1004AS20T1](#) [JS7352](#) [JI-F103WN-L301](#) [JI-F103WN-L252](#) [JI-103C1R2-L102](#) [JI-F103WN-L102](#)