

## SOT-23 Plastic-Encapsulate ESD Protection Diodes


### Features

- Low leakage current
- SOT-23 surface mount package
- IEC 61000-4-2 (ESD Air):  $\pm 30\text{kV}$
- IEC 61000-4-2 (ESD Contact):  $\pm 30\text{kV}$
- IEC 61000-4-5 (Lightning 8/20 $\mu\text{s}$ ): 8A


### Applications

- Automotive Applications
- CAN Bus
- Electronic Control Units
- Body Control Units
- ADAS Control Units
- PowerTrain Control Units

### Function Diagram

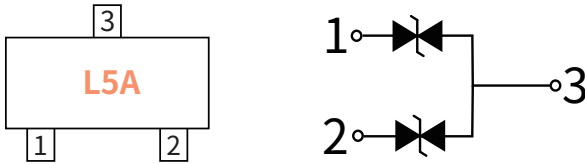

**Reverse Working Voltage**  
5V Max.  
**Normal capacitance**  
20pF(Max.)

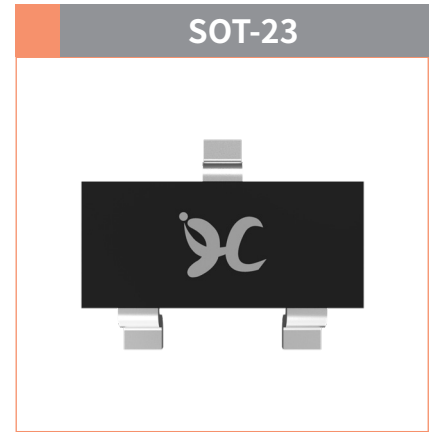


### Maximum Ratings (Ta=25°C Unless otherwise specified)

| SYMBOL           | PARAMETER                           | CONDITIONS                      | VALUE       | UNIT |
|------------------|-------------------------------------|---------------------------------|-------------|------|
| V <sub>ESD</sub> | Electrostatic Discharge Voltage     | ESD per IEC 61000-4-2( Air )    | $\pm 30$    | KV   |
|                  |                                     | ESD per IEC 61000-4-2( Contact) | $\pm 30$    | KV   |
| P <sub>PP</sub>  | Peak Pulse Power                    | tp = 8/20 $\mu\text{s}$         | 95          | W    |
| I <sub>PP</sub>  | Rated Peak Pulse Current            | tp = 8/20 $\mu\text{s}$         | 8.0         | A    |
| T <sub>J</sub>   | Operating JunctionTemperature Range | —                               | -55 to +125 | °C   |
| T <sub>STG</sub> | Operating JunctionTemperature Range | —                               | -55 to +150 | °C   |

### Electrical Parameter




| SYMBOL           | PARAMETER  |
|------------------|--|
| V <sub>C</sub>   | Clamping Voltage @ I <sub>PP</sub>               |
| V <sub>BR</sub>  | Breakdown Voltage @ I <sub>T</sub>               |
| I <sub>PP</sub>  | Peak Pulse Current                               |
| I <sub>T</sub>   | Test Current                                     |
| I <sub>R</sub>   | Reverse Leakage Current @ VRWM                   |
| V <sub>RWM</sub> | Peak Reverse Working Voltage                     |
| P <sub>PP</sub>  | Peak Pulse Power Dissipation                     |
| C <sub>J</sub>   | Junction Capacitance @ V <sub>R</sub> =0V,f=1MHz |
| I <sub>F</sub>   | Forward Current                                  |
| V <sub>F</sub>   | Forward Voltage @I <sub>F</sub>                  |

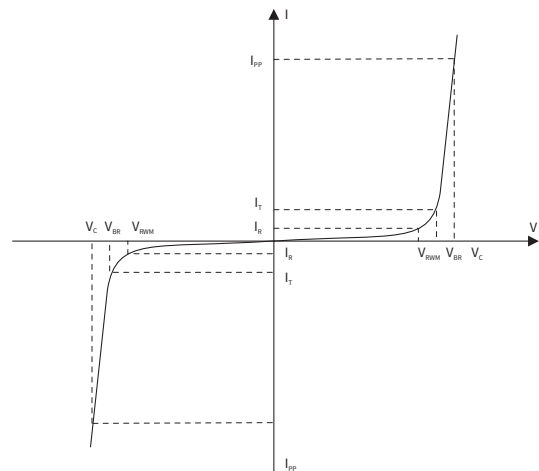

## Electrical Characteristics (Ta=25°C Unless otherwise specified)

| PARAMETER                    | SYMBOL    | CONDITION                                 | Min | Typ | Max | UNIT          |
|------------------------------|-----------|---|-----|-----|-----|---------------|
| Peak Reverse Working Voltage | $V_{RWM}$ | $T_a=25^\circ\text{C}$                    | —   | —   | 5.0 | V             |
| Breakdown Voltage            | $V_{BR}$  | $I_R=1.0\text{mA}, T_a=25^\circ\text{C}$  | 5.6 | —   | 8.0 | V             |
| Reverse Leakage Current      | $I_R$     | $V_R=5\text{V}, T_a=25^\circ\text{C}$     | —   | —   | 0.1 | $\mu\text{A}$ |
| Clamping Voltage             | $V_C$     | $I_{PP}=1.0\text{A}, t_p=8/20\mu\text{s}$ | —   | —   | 8.5 | V             |
|                              |           | $I_{PP}=8\text{A}, t_p=8/20\mu\text{s}$   | —   | —   | 12  |               |
| Junction Capacitance         | $C_J$     | $V_R=0\text{V}, f=1\text{MHz}$            | —   | —   | 20  | pF            |

## Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

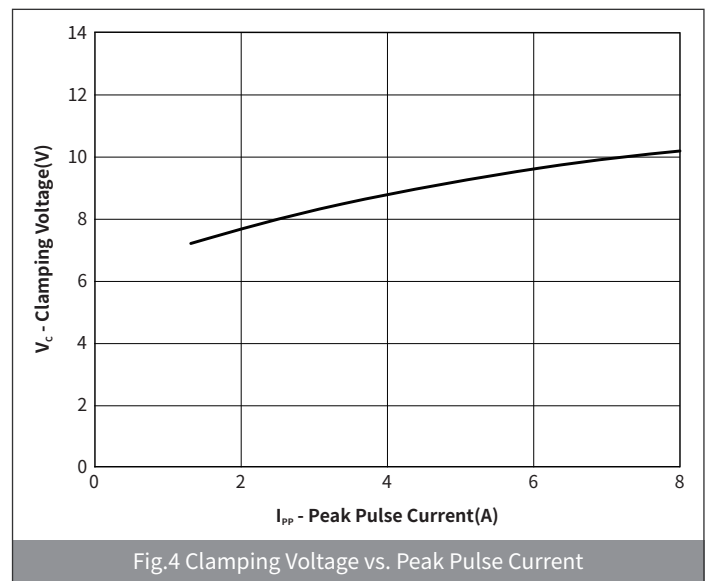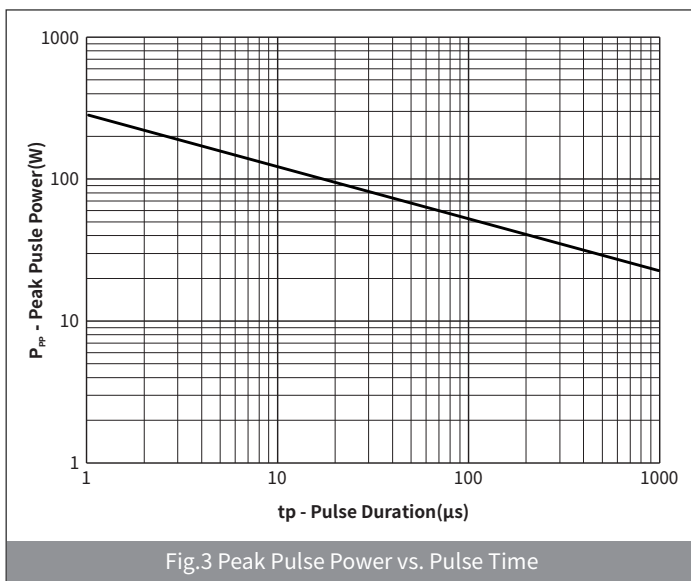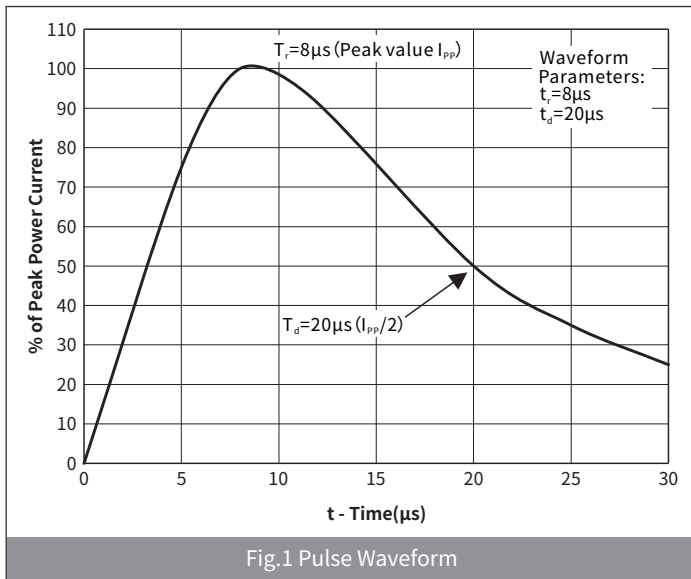


## Ordering Information

| PREFERED P/N | PACKAGE | SIZE(mm)        | DELIVERY MODE | MPQ(PCS) |
|--------------|---------|-----------------|---------------|----------|
| H5VNT2B      | SOT-23  | 2.90×2.40×1.025 | 7" REEL       | 3000     |


## Recommended Soldering Conditions



## Package Outline Dimensions (SOT-23)

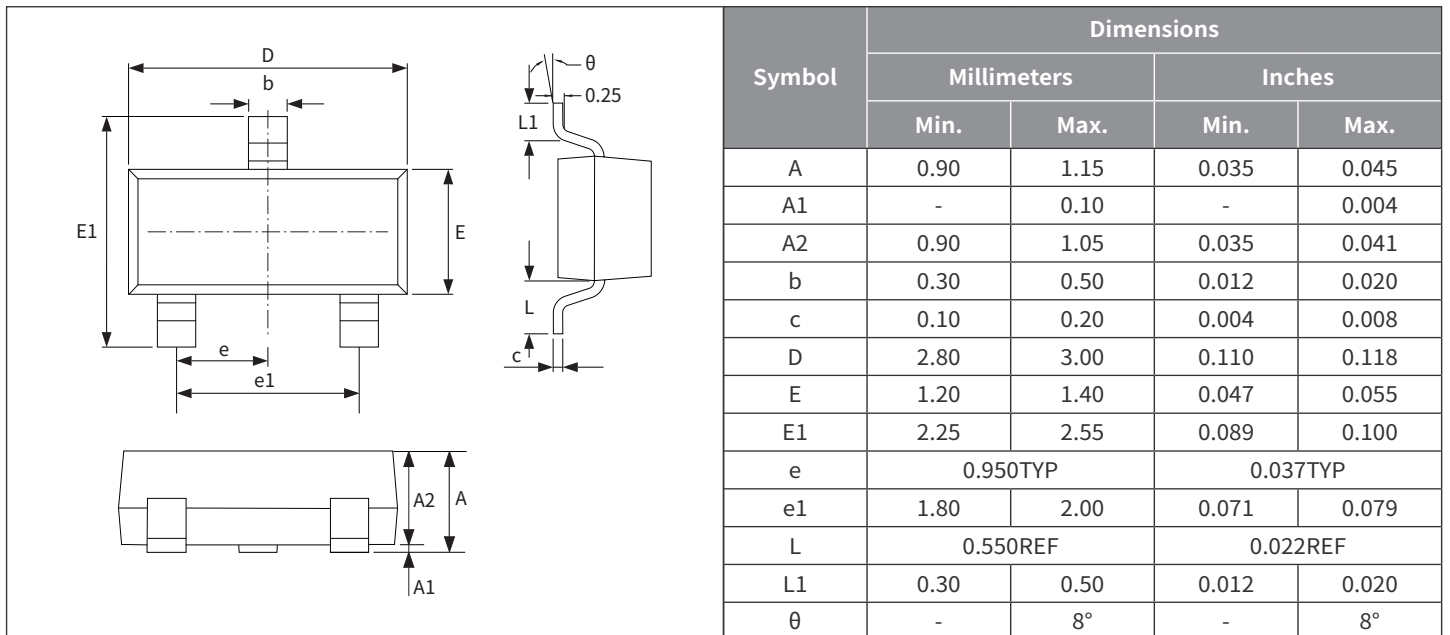

## Suggested Pad Layout

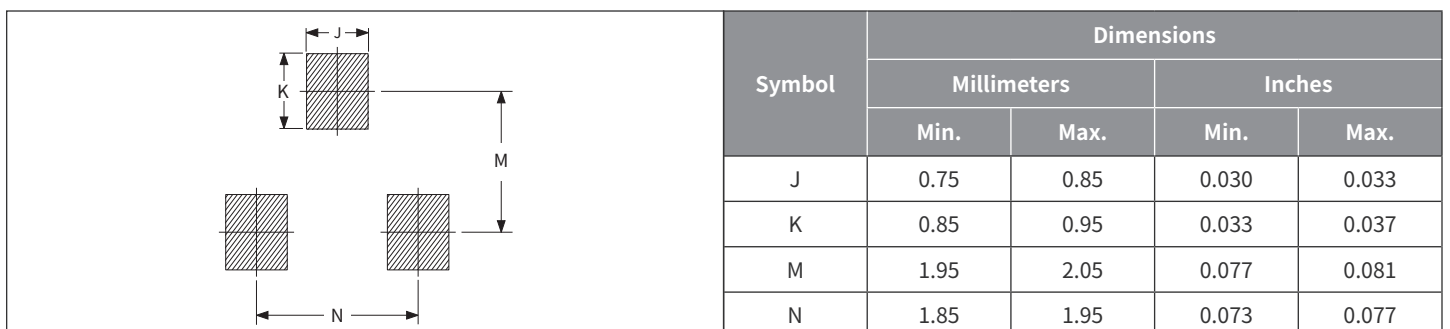

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [hongjiacheng](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)  
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)  
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)  
[ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)  
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)  
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)