



Wiha. Premium Tools
for Professionals.


Wiha SoftFinish® electric. The Safe & Comfortable Insulated VDE Screwdriver.



*Insulation moulded
directly onto blade
offers maximum safety.*



*Ergonomic handle
geometry with
SoftFinish® surface
gives highest
possible comfort.*

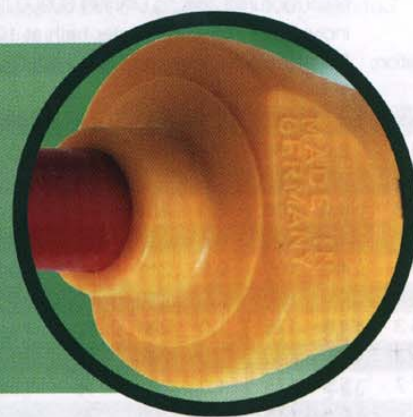


Applications on live equipment are subject to very special requirements. The focus is on absolute user safety and Wiha demonstrates this with a wealth of details.

The high quality blade insulation is moulded directly onto the blade and therefore guarantees safety when working on live equipment up to 1500 V DC or 1000 V AC. To maintain this safety, each screwdriver of the SoftFinish® electric series is individually tested in a water bath at 10.000 Volts according to DIN EN 60900.

The roll-off protection and the special handle geometry offer optimum handling and electrical safety, even in critical applications. Furthermore, the exclusive SoftFinish® handle shape allows maximum user comfort.

SoftFinish® electric Advantages:

- Insulation moulded directly onto blade
- Tested to the professional GS Standard
- Safety when working up to 1000 V AC and 1500 V DC
- Each screwdriver is individually tested in a water bath at 10.000 Volts according to DIN EN 60900 (IEC 900)
- Multi-component SoftFinish® handle provides maximum user comfort
- Ergonomically perfect handle design
- Imprinted screw symbol on handle end for fast identification

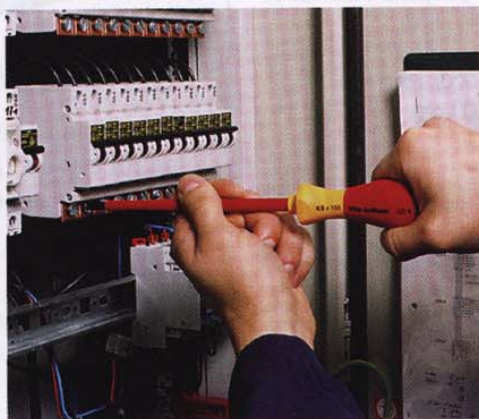



Wiha. Premium Tools
for Professionals.

Wiha SoftFinish® electric. The Safe & Comfortable Insulated VDE Screwdriver.

For Slotted & Phillips Screws.



320 N VDE Slotted Screwdriver.

Insulation up to 1000 V AC, GS-Mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® handle, multi-component with roll-off protection.

Standards: DIN 7437, DIN 5264, ISO 2380.
Manufactured acc. to DIN EN 60900 (IEC 900), each tool individually tested in a water bath at 10 000 Volts.

Application: For electrical applications up to 1000 V AC.

Order-No.	Ø	L	W	W	W	W
00819 2	2.0	60	0.4	164	23	10
00820 8	2.5	75	0.4	179	23	10
00821 5	3.0	100	0.5	204	23	10
00822 2	3.5	100	0.6	204	23	10
00823 9	4.0	100	0.8	211	30	10
00824 6	4.5	125	1.0	236	30	10
00825 3	4.5	175	1.0	286	30	10
00826 0	5.5	125	1.0	243	36	10
00827 7	5.5	175	1.0	293	36	10
00828 4	6.0	150	1.2	268	36	10
00829 1	6.5	150	1.2	268	36	10
00830 7	8.0	175	1.2	299	41	10
00831 4	8.0	175	1.6	299	41	10
00832 1	10.0	200	1.6	324	41	10

• Non-DIN sizes.



321 N VDE Phillips Screwdriver.

Insulation up to 1000 V AC, GS-Mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® handle, multi-component with roll-off protection.

Standards: DIN 7438, ISO 8764.
Manufactured acc. to DIN EN 60900 (IEC 900), each tool individually tested in a water bath at 10 000 Volts.

Application: For electrical applications up to 1000 V AC.

Order-No.	Ø	L	W	W	W	W
00846 8	0	60	164	23	10	
00847 5	1	80	191	30	10	
00848 2	2	100	218	36	10	
00849 9	3	150	274	41	10	
00850 5	4	200	324	41	5	

For Pozidriv Screws.



324 VDE Pozidriv Screwdriver.

Insulation up to 1000 V AC, GS-Mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® handle, multi-component with roll-off protection.

Standards: DIN 7438, ISO 8764.
Manufactured acc. to DIN EN 60900 (IEC 900), each tool individually tested in a water bath at 10 000 Volts.

Application: For electrical applications up to 1000 V AC.

Order-No.	Ø	L	W	W	W	W
00877 2	0	60	164	23	10	
00878 9	1	80	191	30	10	
00879 6	2	100	218	36	10	
00880 2	3	150	324	41	5	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [wiha](#) manufacturer:

Other Similar products are found below :

[56818](#) [00573](#) [01030](#) [75802](#) [21248](#) [26307](#) [27302](#) [27835](#) [28050](#) [28084](#) [28390](#) [28501](#) [28507](#) [26113](#) [26539](#) [26626](#) [26629](#) [26804](#) [28522](#)
[28882](#) [32573](#) [32705](#) [32712](#) [32752](#) [32954](#) [34700](#) [36268](#) [36791](#) [38043](#) [43618](#) [44506](#) [54095](#) [31705](#) [31890](#) [32090](#) [32093](#) [32714](#) [32793](#)
[36453](#) [37225](#) [39104](#) [41106](#) [44503](#) [45811](#) [46796](#) [09393](#) [66991](#) [74586](#) [74732](#) [27235](#)