

SOT-523 Plastic-Encapsulate Transistors

MMBT5401T TRANSISTOR (PNP)

FEATURES


- Complementary to MMBT5551W
- Small Surface Mount Package
- Ideal for Medium Power Amplificationand Switching

MARKING:K4M

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

| Symbol | Parameter | Value | Unit |
|-----------------|---|----------|------|
| V_{CBO} | Collector-Base Voltage | -160 | V |
| V_{CEO} | Collector-Emitter Voltage | -150 | V |
| V_{EBO} | Emitter-Base Voltage | -5 | V |
| I_c | Collector Current | -600 | mA |
| P_c | Collector Power Dissipation | 200 | mW |
| $R_{\theta JA}$ | Thermal Resistance From Junction To Ambient | 625 | °C/W |
| T_j | Junction Temperature | 150 | °C |
| T_{stg} | Storage Temperature | -55~+150 | °C |

SOT-523











1. BASE
2. Emitter
3. COLLECTOR


ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Test conditions | Min | Typ | Max | Unit |
|--------------------------------------|---------------|---|------|-----|------|------|
| Collector-base breakdown voltage | $V_{(BR)CBO}$ | $I_C=-100\mu\text{A}, I_E=0$ | -160 | | | V |
| Collector-emitter breakdown voltage | $V_{(BR)CEO}$ | $I_C=-1\text{mA}, I_B=0$ | -150 | | | V |
| Emitter-base breakdown voltage | $V_{(BR)EBO}$ | $I_E=-10\mu\text{A}, I_C=0$ | -5 | | | V |
| Collector cut-off current | I_{CBO} | $V_{CB}=-120\text{V}, I_E=0$ | | | -50 | nA |
| Emitter cut-off current | I_{EBO} | $V_{EB}=-3\text{V}, I_C=0$ | | | -50 | nA |
| DC current gain | h_{FE} | $V_{CE}=-5\text{V}, I_C=-1\text{mA}$ | 50 | | | |
| | | $V_{CE}=-5\text{V}, I_C=-10\text{mA}$ | 60 | | 300 | |
| | | $V_{CE}=-5\text{V}, I_C=-50\text{mA}$ | 50 | | | |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | $I_C=-50\text{mA}, I_B=-5\text{mA}$ | | | -0.5 | V |
| | | $I_C=-10\text{mA}, I_B=-1\text{mA}$ | | | -0.2 | V |
| Base-emitter saturation voltage | $V_{BE(sat)}$ | $I_C=-50\text{mA}, I_B=-5\text{mA}$ | | | -1 | V |
| | | $I_C=-10\text{mA}, I_B=-1\text{mA}$ | | | -1 | V |
| Transition frequency | f_T | $V_{CE}=-10\text{V}, I_C=-10\text{mA}, f=100\text{MHz}$ | 100 | | | MHz |
| Collector output capacitance | C_{ob} | $V_{CB}=-10\text{V}, I_E=0, f=1\text{MHz}$ | | | 6 | pF |

Typical Characteristics

Static Characteristic

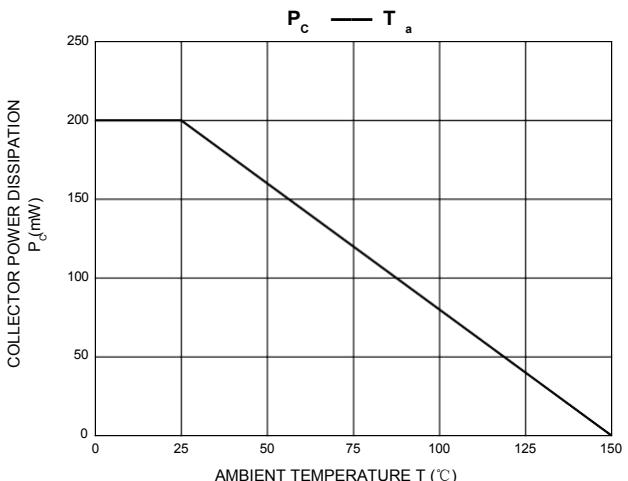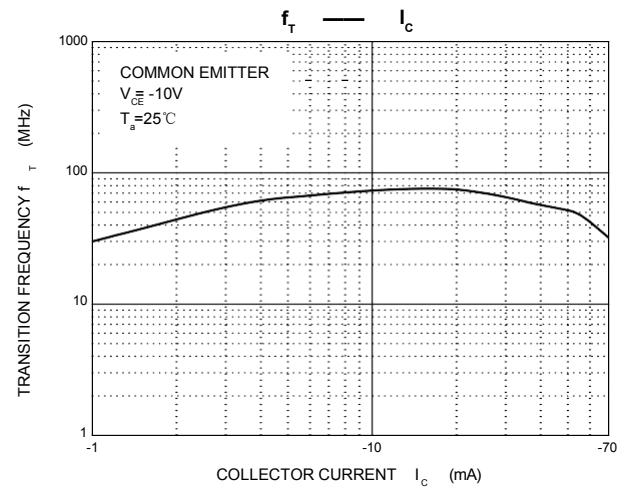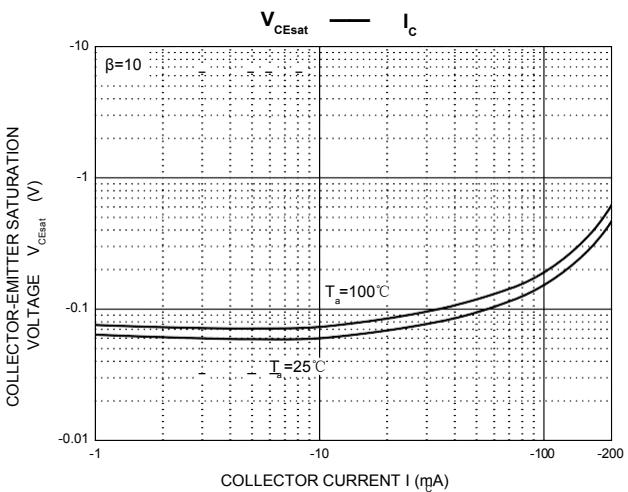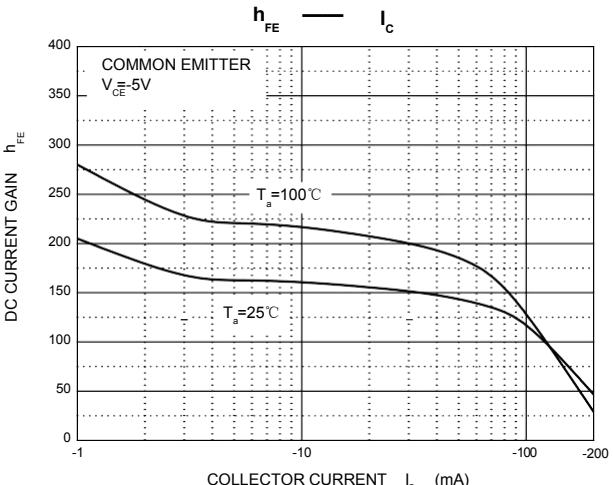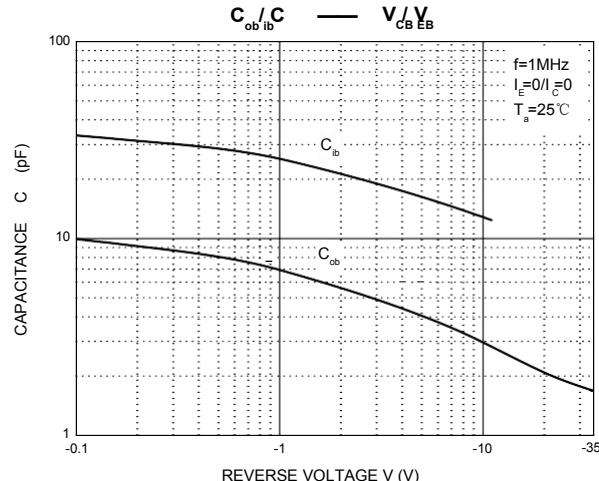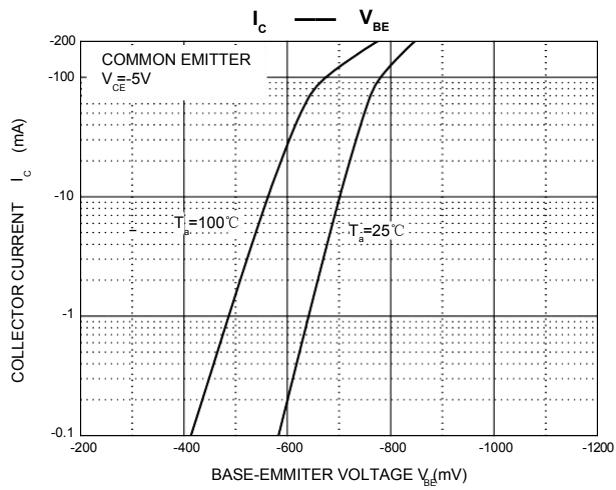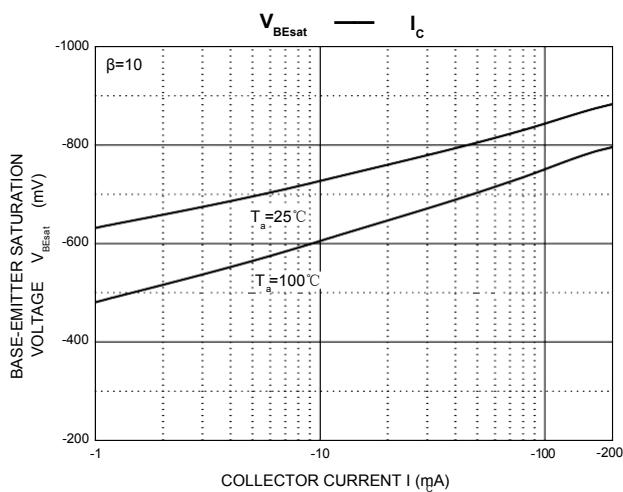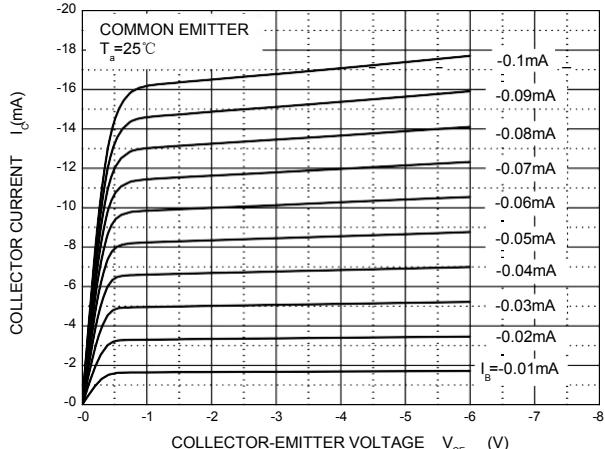

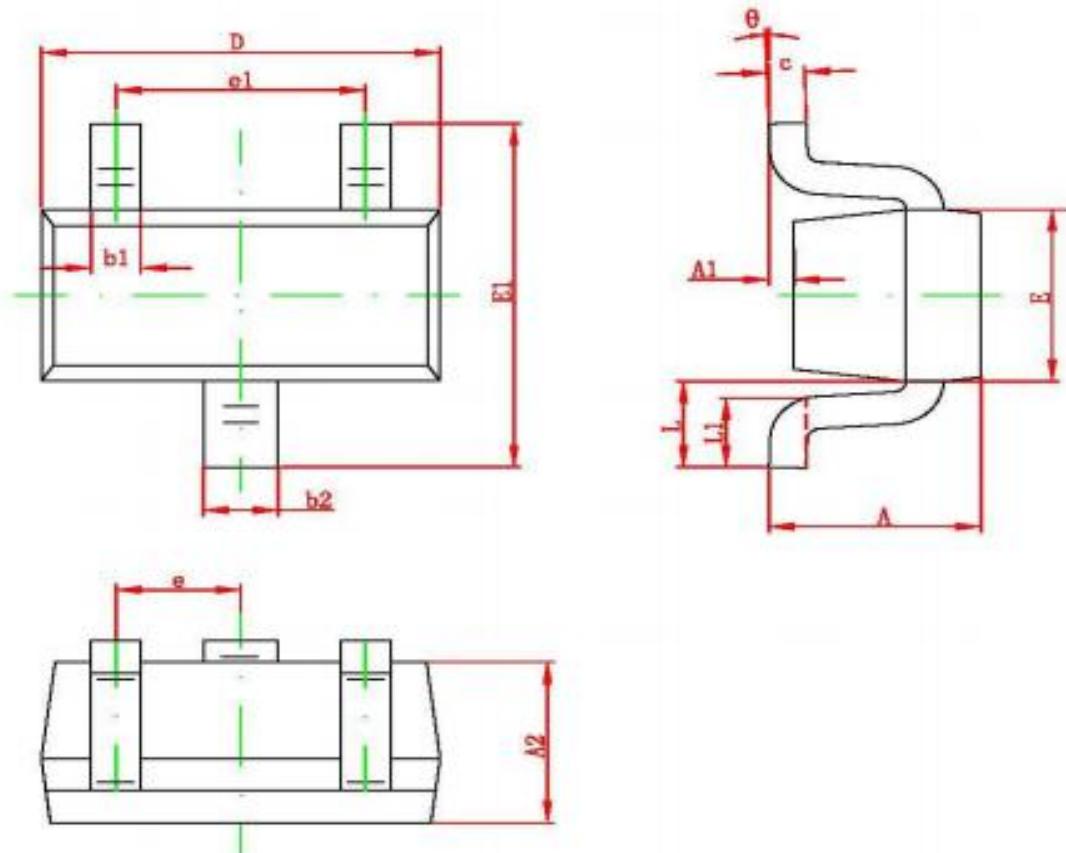SOT-523 PACKAGE OUTLINE DIMENSIONS


| Symbol | Dimensions in Millimeters | | Dimensions in Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 0.700 | 0.900 | 0.028 | 0.035 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 0.700 | 0.800 | 0.028 | 0.031 |
| b1 | 0.150 | 0.250 | 0.006 | 0.010 |
| b2 | 0.250 | 0.350 | 0.010 | 0.014 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 1.500 | 1.700 | 0.059 | 0.067 |
| E | 0.700 | 0.900 | 0.028 | 0.035 |
| E1 | 1.450 | 1.750 | 0.057 | 0.069 |
| e | 0.500 TYP. | | 0.020 TYP. | |
| e1 | 0.900 | 1.100 | 0.035 | 0.043 |
| L | 0.400 REF. | | 0.016 REF. | |
| L1 | 0.260 | 0.460 | 0.010 | 0.018 |
| θ | 0° | 8° | 0° | 8° |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by Hong Kong Chuangji manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [SP000011176](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC2412KT146S](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [MJE340](#) [Jantx2N5416](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#)
[CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#) [NJL0302DG](#) [30A02MH-TL-E](#) [NTE13](#) [NTE26](#)
[NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [STX83003-AP](#) [JANTX2N2920L](#) [JANSR2N2222AUB](#) [CMLT3946EG TR](#) [2SA1371D-AE](#)