


# NPN Silicon Epitaxial Planar Transistor

for microwave low noise amplifier at VHF, UHF and CATV band



The transistor is subdivided into three groups, Q, R and S, according to its DC current gain.

1.Base 2.Emitter 3.Collector  
SOT-323 Plastic Package

HFE	MARKING
Q	R23
R	R24
S	R25







## Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Collector Base Voltage	$V_{CB0}$	20	V
Collector Emitter Voltage	$V_{CEO}$	12	V
Emitter Base Voltage	$V_{EBO}$	3	V
Collector Current	$I_C$	100	mA
Power Dissipation	$P_{tot}$	200	mW
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_s$	- 65 to + 150	$^\circ\text{C}$

## Characteristics ( $T_a = 25\text{ }^\circ\text{C}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	
DC Current Gain at $V_{CE} = 10\text{ V}$ , $I_C = 20\text{ mA}$ Current Gain Group	Q	$h_{FE}$	50	-	100	-
	R	$h_{FE}$	80	-	160	-
	S	$h_{FE}$	125	-	250	-
Collector Cutoff Current at $V_{CB} = 10\text{ V}$	$I_{CB0}$	-	-	1	$\mu\text{A}$	
Emitter Cutoff Current at $V_{EB} = 1\text{ V}$	$I_{EBO}$	-	-	1	$\mu\text{A}$	
Gain Bandwidth Product at $V_{CE} = 10\text{ V}$ , $I_C = 20\text{ mA}$	$f_T$	-	3	-	GHz	
Feed-Back Capacitance at $V_{CB} = 10\text{ V}$ , $f = 1\text{ MHz}$	$C_{re}^{1)}$	-	0.55	1	pF	
Noise Figure at $V_{CE} = 10\text{ V}$ , $I_C = 7\text{ mA}$ , $f = 1\text{ GHz}$	NF	-	1.1	2	dB	

1) The emitter terminal and the case shall be connected to the guard terminal of the three-terminal capacitance bridge.

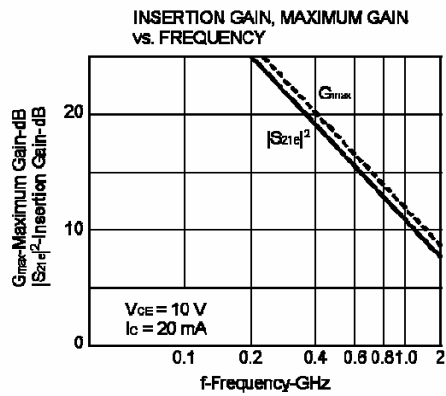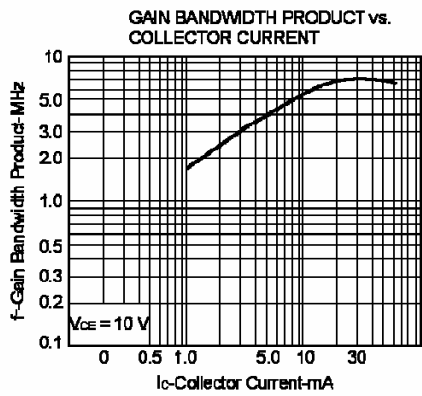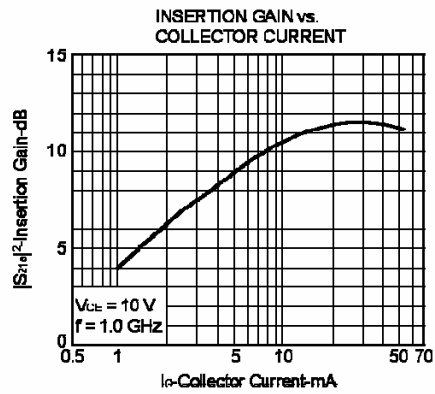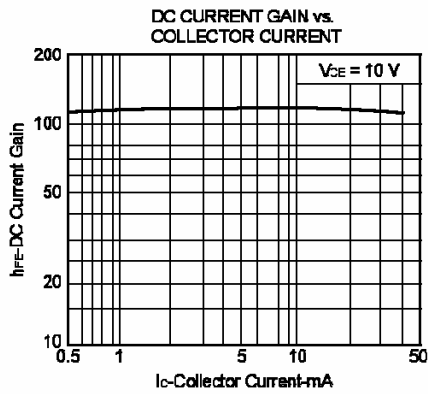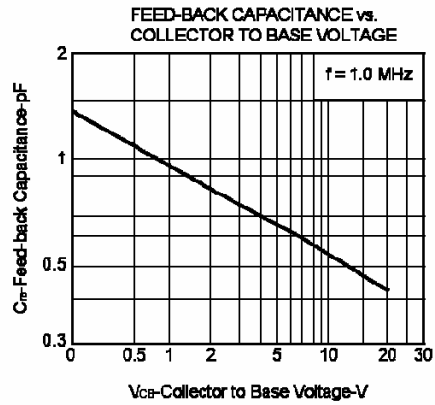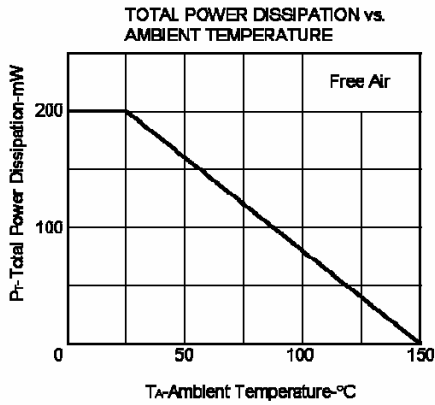

## SOT-323 Package Outline Dimensions

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [Hong Kong Chuangji manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#) [JAN2N3507](#)