



# Chip Inductors – 0603HL Series (1608)

- Higher inductance values than other 0603 inductors
- Inductance range: 330 nH – 3.3 μH

| Part number <sup>1</sup> | Inductance <sup>2</sup><br>±5% (nH) | Q typ <sup>3</sup> | SRF typ <sup>4</sup><br>(MHz) | DCR max <sup>5</sup><br>(Ohms) | Irms <sup>6</sup><br>(mA) | Color code <sup>7</sup> |
|--------------------------|-------------------------------------|--------------------|-------------------------------|--------------------------------|---------------------------|-------------------------|
| 0603HL-331XJR_           | 330 @ 25 MHz                        | 13 @ 25 MHz        | 420                           | 0.970                          | 330                       | Violet                  |
| 0603HL-391XJR_           | 390 @ 25 MHz                        | 13 @ 25 MHz        | 400                           | 1.05                           | 330                       | Gray                    |
| 0603HL-471XJR_           | 470 @ 25 MHz                        | 12 @ 25 MHz        | 200                           | 1.15                           | 300                       | White                   |
| 0603HL-511XJR_           | 510 @ 25 MHz                        | 12 @ 25 MHz        | 340                           | 1.20                           | 300                       | Black                   |
| 0603HL-561XJR_           | 560 @ 25 MHz                        | 12 @ 25 MHz        | 330                           | 1.35                           | 300                       | Brown                   |
| 0603HL-681XJR_           | 680 @ 25 MHz                        | 12 @ 25 MHz        | 310                           | 1.80                           | 260                       | Red                     |
| 0603HL-821XJR_           | 820 @ 25 MHz                        | 14 @ 25 MHz        | 290                           | 2.45                           | 190                       | Orange                  |
| 0603HL-102XJR_           | 1000 @ 25 MHz                       | 14 @ 25 MHz        | 250                           | 2.80                           | 190                       | Yellow                  |
| 0603HL-122XJR_           | 1200 @ 25 MHz                       | 14 @ 25 MHz        | 230                           | 3.20                           | 180                       | Green                   |
| 0603HL-152XJR_           | 1500 @ 25 MHz                       | 15 @ 25 MHz        | 190                           | 4.10                           | 150                       | Blue                    |
| 0603HL-182XJR_           | 1800 @ 25 MHz                       | 16 @ 25 MHz        | 180                           | 5.30                           | 140                       | Violet                  |
| 0603HL-222XJR_           | 2200 @ 25 MHz                       | 16 @ 25 MHz        | 165                           | 5.90                           | 130                       | Gray                    |
| 0603HL-272XJR_           | 2700 @ 25 MHz                       | 16 @ 25 MHz        | 150                           | 7.00                           | 120                       | White                   |
| 0603HL-332XJR_           | 3300 @ 25 MHz                       | 18 @ 25 MHz        | 135                           | 9.10                           | 110                       | Black                   |

1. When ordering, please specify **termination** and **packaging** code:

**0603HL-332XJRC**

**Termination:** **R** = RoHS compliant matte tin over nickel over silver-platinum-glass frit  
Special order: **Q** = RoHS tin-silver-copper (95.5/4/0.5) or **P** = non-RoHS tin-lead (63/37).

**Packaging:** **C** = 7" machine-ready reel. EIA-481 embossed plastic tape (2000 parts per full reel).

**B** = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.

- Inductance measured at 0.1 Vrms, using a Coilcraft SMD-A fixture in Agilent/HP 4287A impedance analyzer or equivalent with Coilcraft-provided correlation pieces.
  - Q measured using a Coilcraft SMD-A fixture in Agilent/HP 4287A impedance analyzer or equivalent.
  - SRF measured using Agilent/HP 8753D network analyzer with Coilcraft SMD-D test fixture.
  - DCR measured on Cambridge Technology Micro-ohmmeter or equivalent.
  - Current that causes a 15°C temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
  - Each part is marked with a single dot. The color dots are not unique identifiers and correspond to multiple inductance values.
  - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

**Designer's Kit C449** contains 10 of each value

**Core material** Ceramic

**Environmental** RoHS compliant without exemption, halogen free

**Terminations** RoHS compliant matte tin over nickel over silver-platinum-glass frit. Other terminations available at additional cost.

**Weight** 3.2 – 4.4 mg

**Ambient temperature** –40°C to +125°C with Irms current

**Maximum part temperature** +140°C (ambient + temp rise).

**Storage temperature** Component: –40°C to +140°C.

Tape & reel packaging: –40°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Temperature Coefficient of Inductance (TCL)** +50 to +150 ppm/°C

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

One per billion hours / one billion hours, calculated per Telcordia SR-332

**Packaging** 2000 per 7" reel. Plastic tape: 8 mm wide, 0.23 mm thick, 4 mm pocket spacing, 1.0 mm pocket depth

**PCB washing** Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787\\_PCB\\_Washing.pdf](#).



www.coilcraft.com

**US** +1-847-639-6400 sales@coilcraft.com  
**UK** +44-1236-730595 sales@coilcraft-europe.com  
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw  
**China** +86-21-6218 8074 sales@coilcraft.com.cn  
**Singapore** +65-6484 8412 sales@coilcraft.com.sg

Document 894-1 Revised 10/12/15


© Coilcraft Inc. 2017

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.




# Chip Inductors – 0603HL Series



## Typical L vs Frequency

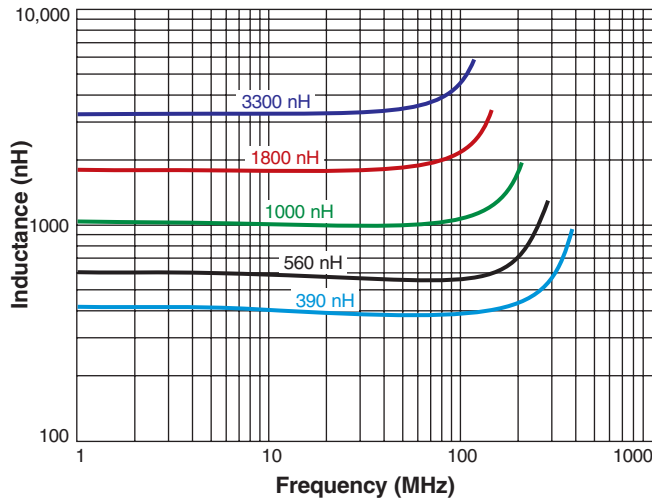

## Typical Q vs Frequency

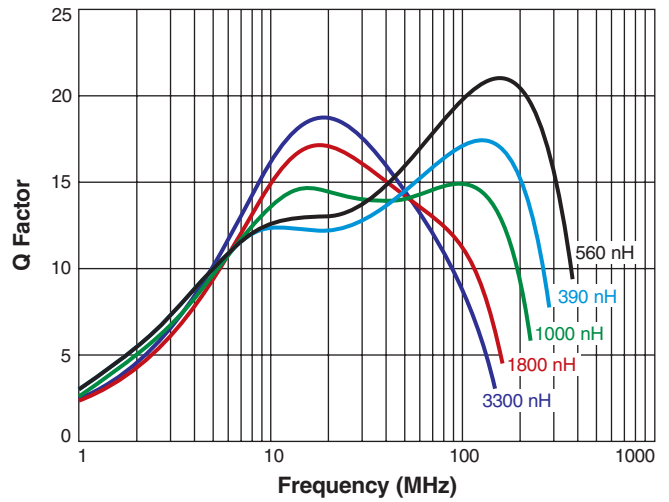

## Typical Impedance vs Frequency

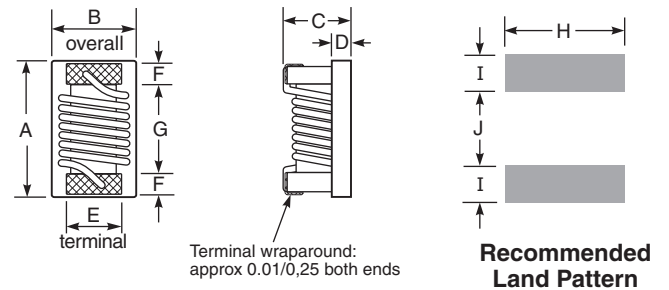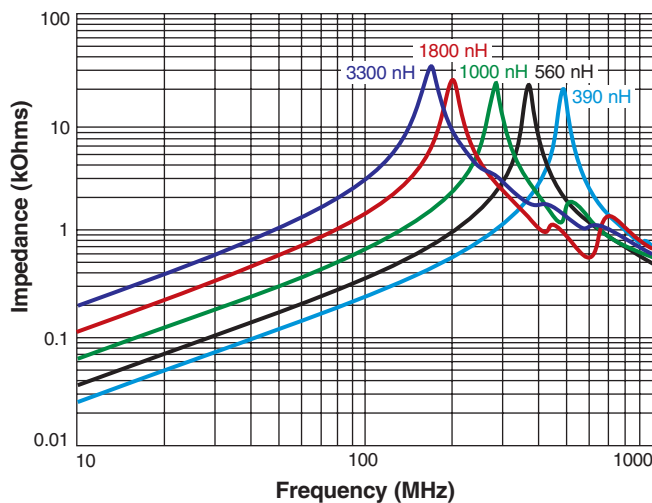

| A     | B     | C     | D     | E     | F     | G     | H     | I     | J     |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| max   | max   | max   |       |       |       |       |       |       |       |
| 0.071 | 0.047 | 0.037 | 0.010 | 0.030 | 0.011 | 0.038 | 0.040 | 0.025 | 0.025 |
| 1,80  | 1,19  | 0,94  | 0,25  | 0,76  | 0,28  | 0,97  | 1,02  | 0,64  | 0,64  |

**Note:** Height dimension (C) is before optional solder application. For maximum height dimension including solder, add 0.006 in / 0,152 mm.



**US** +1-847-639-6400 sales@coilcraft.com  
**UK** +44-1236-730595 sales@coilcraft-europe.com  
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw  
**China** +86-21-6218 8074 sales@coilcraft.com.cn  
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 894-2 Revised 10/12/15  
 © Coilcraft Inc. 2017  
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Coilcraft](#) manufacturer:*

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)