


FEATURES

- High breakdown voltage and high current. $BV_{CEO}=-80V, I_C=-1A$
- Good h_{FE} Linearity.
- Low $V_{CE(sat)}$.
- Complements the 2SD1898.

Marking: ZL

Maximum Ratings ($T_a=25\text{ }^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	V_{CBO}	-80	V
Collector-Emitter Voltage	V_{CEO}	-80	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current -Continuous	I_C	-1	A
Collector Power dissipation	P_C	500	mW
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-55to +150	$^{\circ}\text{C}$

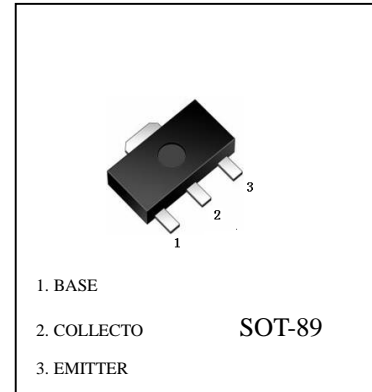2SB1260(PNP)


ELECTRICAL CHARACTERISTICS (@ $T_a=25\text{ }^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V_{CBO}	$I_C=-50\mu\text{A}$ $I_E=0$	-80			V
Collector-emitter breakdown voltage	V_{CEO}	$I_C=-1\text{mA}$ $I_B=0$	-80			V
Emitter-base breakdown voltage	V_{EBO}	$I_E=-50\mu\text{A}$ $I_C=0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB}=-60\text{V}$ $I_E=0$			-1	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=-4\text{V}, I_C=0$			-1	μA
DC current gain	h_{FE}	$V_{CE}=-3\text{V}$ $I_C=-100\text{mA}$	82		390	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=-500\text{mA}$ $I_B=-50\text{mA}$			-0.4	V
Transition frequency	f_T	$V_{CE}=-5\text{V}, I_C=-50\text{mA},$ $f=30\text{MHz}$		100		MHz
Output Capacitance	C_{obo}	$V_{CB}=-10\text{V}$ $f=1.0\text{MHz}$ $I_E=0$	-	25		pF

2SB1260 Typical Characteristics

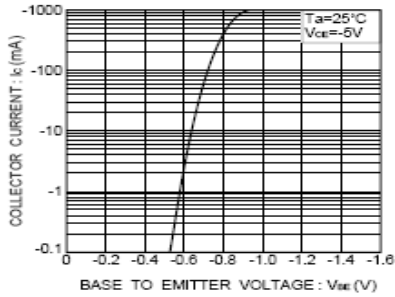


Fig.1 Grounded emitter propagation characteristics

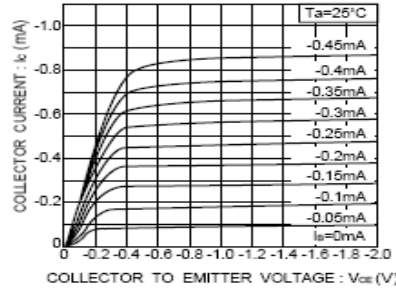


Fig.2 Grounded emitter output characteristics

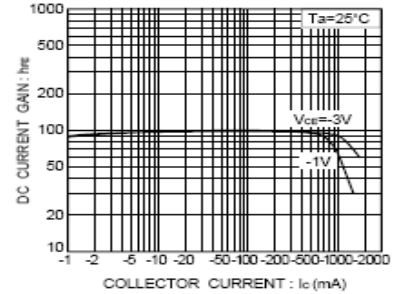


Fig.3 DC current gain vs. collector current

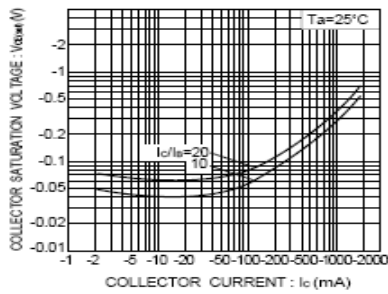


Fig.4 Collector-emitter saturation voltage vs. collector current

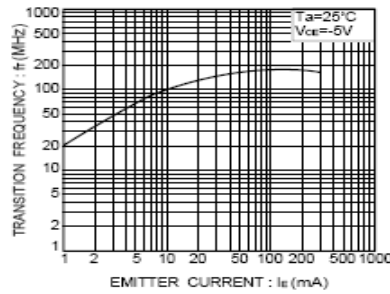


Fig.5 Gain bandwidth product vs. emitter current

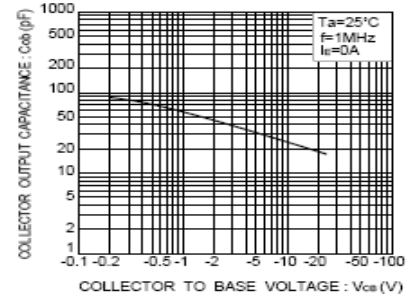


Fig.6 Collector output capacitance vs. collector-base voltage

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Hottech manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)