


SWITCHING DIODE


FEATURES

- Fast Switching Speed
- For General Purpose Switching Applications
- High Conductance


MARKING:



BAW56:A1



BAV70:A4



BAV99:A7

BAW56/BAV70/BAV99



MAXIMUM RATINGS (TA=25°C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Reverse voltage	V	70	V
Forward Current	I	200	mA
Peak Forward Surge Current	IFM(surge)	500	mA
Power Dissipation	P	225	mW
Thermal Resistance Junction to Ambient Air	R J	556	°C/W
Junction temperature	T	150	°C
Storage temperature range	TST	-55-150	°C

ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Reverse Breakdown Voltage	V R	70			V	IR=100µA
Forward voltage	VF1			0.715	V	IF=1mA
	VF2			0.855	V	IF=10mA
	VF3			1	V	IF=50mA
	VF4			1.25	V	IF=150mA
Reverse current	IR			2.5	µA	VR=70V
Capacitance between terminals	CT			1.5	pF	VR=0,f=1MHz
Reverse recovery time	t <sub>rr</sub>			6	ns	IF = IR = 10mA, Irr= 0.1 x IR, RL = 100

**BAW56/BAV70/BAV99** Typical Characteristics

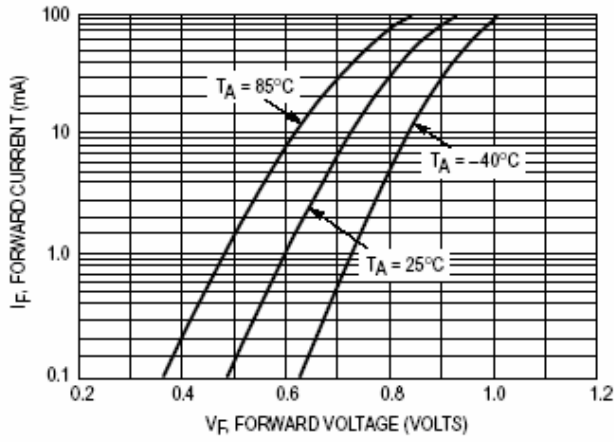


Figure 1. Forward Voltage

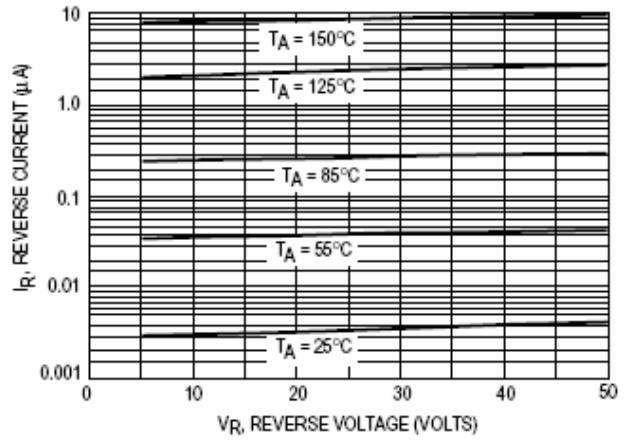


Figure 2 Leakage Current

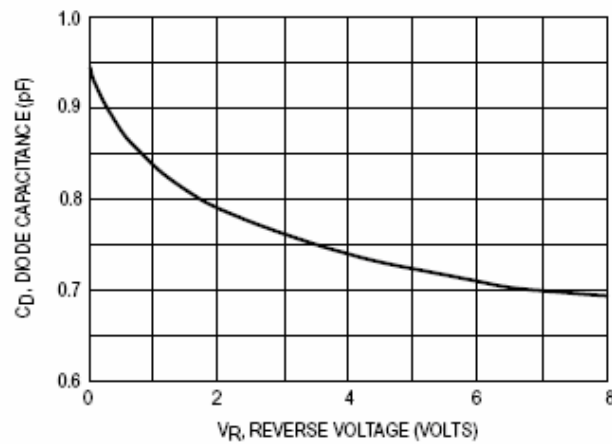


Figure 3 Capacitance

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Diodes - General Purpose, Power, Switching category:](#)

*Click to view products by* [Hottech manufacturer:](#)

Other Similar products are found below :

[MMBD3004S-13-F](#) [RD0306T-H](#) [DSE010-TR-E](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#)  
[1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [FC903-TR-E](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#)  
[1SS226-TP](#) [RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [LL4151-](#)  
[GS18](#) [053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [BAV199E6433HTMA1](#) [BAS28-7](#)  
[BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [RGP30D-E3/73](#) [BAV99TQ-13-F](#) [BAS21DWA-7](#) [NTE6250](#)  
[NTE582-4](#) [NTE582-6](#) [MMDB30-E28X](#)