

5 x 3.2mm Low Power Consumption Clock Oscillator

FEATURES

- Micro-miniature 5.0mm x 3.2mm package, small footprint
- Frequency Range 2.5MHz to 125MHz
- Tristate function standard
- Supply voltage 1.8, 2.5 or 3.3Volts

DESCRIPTION

The XO53 microminiature oscillators have a small footprint but is fully specified. The oscillator is available with supply voltage at 1.8, 2.5 or 3.3 Volts.

SPECIFICATION


Frequency Range:	2.50MHz to 125.0MHz
Supply Voltage:	1.8, 2.5 Volts, 3.3 Volts
Output Logic:	LSTTL/CMOS
Frequency Stability over Temperature Range	
0° to +50°C:	from ±10ppm
0° to +70°C:	from ±15ppm
-55° to +125°C:	from ±25
Rise/Fall Time:	10ns max. (10% to 90%Vdd) (frequency dependant)
Output Voltage:	
HIGH '1':	90%Vdd minimum
LOW '0':	10%Vdd maximum
Output Load	
CMOS:	15pF (50pF available for 3.3V supply)
TTL:	10 LSTTL loads
Duty Cycle:	50%±5% typical
Supply Current:	See table
Startup Time	
2.5MHz to 32MHz:	5ms max.
32MHz to 125MHz:	10ms max.
Ageing:	±5ppm max. per year
Phase Jitter RMS:	10ps typical
Enable Time:	100ms max.
Disable Time:	100ns max.
Tristate Function (Pad 1):	

Output (Pad 3) is active if Pad 1 is not connected or a voltage of 2.2V or greater is applied to Pad 1. Output is high impedance when a voltage of 0.8V or lower is applied to Pad 1.

Note: Parameters are measured at ambient temperature of 25°C, supply voltage as stated and a load of 15pF

PART NUMBERING


Example: **27.000MHz XO53050UCTA**

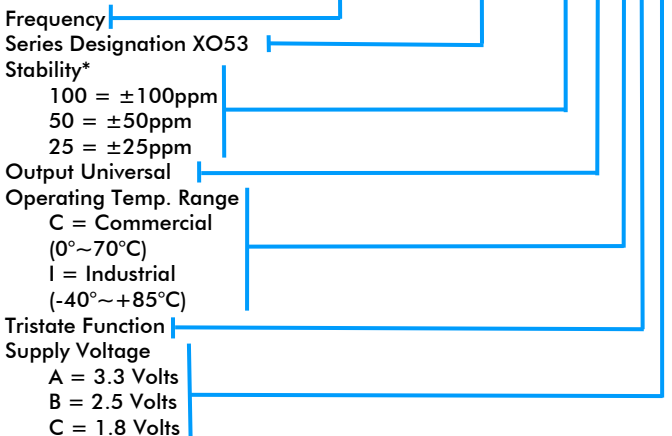

* For other stability requirements enter figure required.




OUTLINE & DIMENSIONS

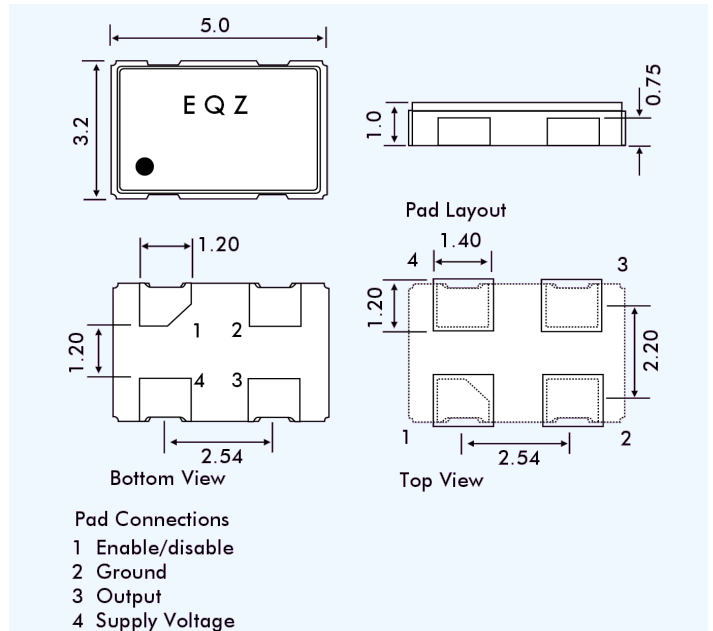

CURRENT CONSUMPTION

Frequency Range	Supply Voltage (±10%)		
	+1.8V	+2.5V	+3.3V
0.3 ~ 1.5MHz	5mA	5mA	5mA
1.5 ~ 20MHz	8mA	8mA	8mA
20 ~ 50MHz	15mA	15mA	15mA
50 ~ 125MHz	22mA	25mA	35mA

SOLDER TEMPERATURE PROFILE

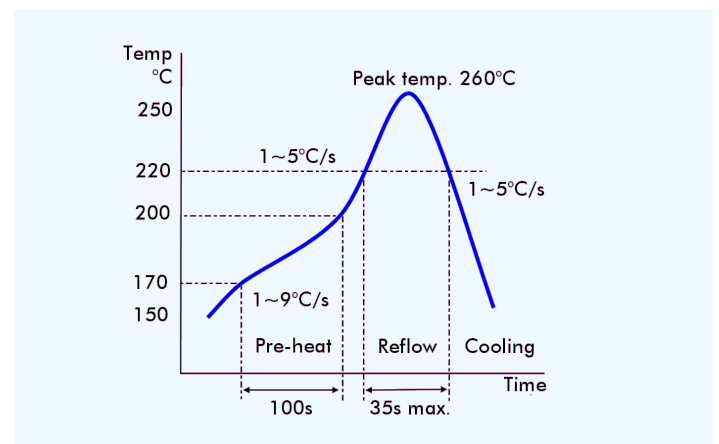

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [euroquartz manufacturer](#):

Other Similar products are found below :

[20.000MHZ 49USMX/30/50/40/18PF/ATF](#) [24.000MHZ MJ/30/30/40/12PF](#) [14.31818MHZ 49USMX/30/50/40/18PF/ATF](#) [16.000MHZ 49USMX/30/50/40/18PF/ATF](#) [4.194304MHZ 49USMX/30/50/40/18PF/ATF](#) [16.384MHZ HC49/4H/30/50/40/18PF/ATF](#) [8.000MHZ HC49/4H/30/50/40/18PF/ATF](#) [18.432MHZ HC49/4H/30/50/40/18PF/ATF](#) [27.000MHZ HC49/4H/30/50/40/18PF/ATF](#) [24.576MHZ MJ/30/30/40/12PF](#) [48.000MHZ XO91050UITA](#) [3.57954MHZ HC49/4H/30/50/40/18PF/ATF](#) [6.000MHZ HC49/4H/30/50/40/18PF/ATF](#) [MH32768C](#) [16.000MHZ XO53050UITA](#) [11.0592MHZ MJ/30/30/40/12PF](#) [12.000MHZ XO53050UITA](#) [10.000MHZ 49USMX/30/50/40/18PF/ATF](#) [6.000MHZ MQ/30/30/-40+90/12PF](#) [4.000MHZ 49USMX/30/50/40/18PF/ATF](#) [32.000MHZ XO53050UITA](#) [12.000MHZ MQ/30/30/40/12PF](#) [25.000MHZ HC49/4H/30/50/40/18PF/ATF](#) [4.19430MHZ HC49/4H/30/50/40/18PF/ATF](#) [27.000MHZ 49USMX/30/50/40/18PF/ATF](#) [14.3181MHZ HC49/4H/30/50/40/18PF/ATF](#) [16.000MHZ MJ/30/30/40/12PF](#) [12.000MHZ 49USMX/30/50/40/18PF/ATF](#)