


- 8 SOCKET OUTLETS WITH EARTHING PIN**
- AUTOMATIC FUSE**
- ILLUMINATED DOUBLE POLE MAINS SWITCH**
- 2 AVAILABLE COLOUR VARIANTS**
- SOCKET OUTLETS SAFE FOR CHILDREN**
- SURGE PROTECTION**
- AVAILABLE CABLE LENGTHS: 1.5m, 3m, 5m**

acar S8 is the basic model of the popular series of acar surge protective strips. Its high quality has been confirmed by our many years' experience on the market and a by 10-year warranty. The device is intended as the universal surge protection, performing the basic functions of protecting both the computer systems (desktops, notebooks, monitors, printers, scanners, etc.) as well as audiovisual (LCD and Plasma TVs, DVD / BD, tuners, amplifiers). Modern and stylish design allows you to place it in any convenient and prominent place (desk, cabinet), its slender casing takes up a little space. Eight protected socket outlets 230V with earthing and the automatic fuse, make the device sufficient for most applications in the office and at home. Mounting brackets are optional and available from the distributor.

Technical data: **acar S8**

Maximum load	P_{MAX} 2300W
Nominal voltage U_N	230V
Nominal frequency	50Hz
Nominal load current	$\Sigma I_N = 10A$ MAX
Surge protection response time	<25ns
Maximum voltage U_C	250V 50Hz
Protection level U_p	$\leq 1.3kV$
Nominal discharge current i_N	2kA (L/N) – 8/20 μs
Maximum discharge current i_{MAX}	6.5kA (L/N) – 8/20 μs
Fuses	1 automatic fuse, slow blow 10A/250V
Anti-shock protection system	earthing pins connected to the protective earthing conductor
Number of socket outlets	8 two-pole socket outlets with earthing pin, 10A/250V
Switch	illuminated double pole mains switch
Housing	made of self-extinguishing plastic
Dimensions	445x54x55mm
Weight	0.48kg

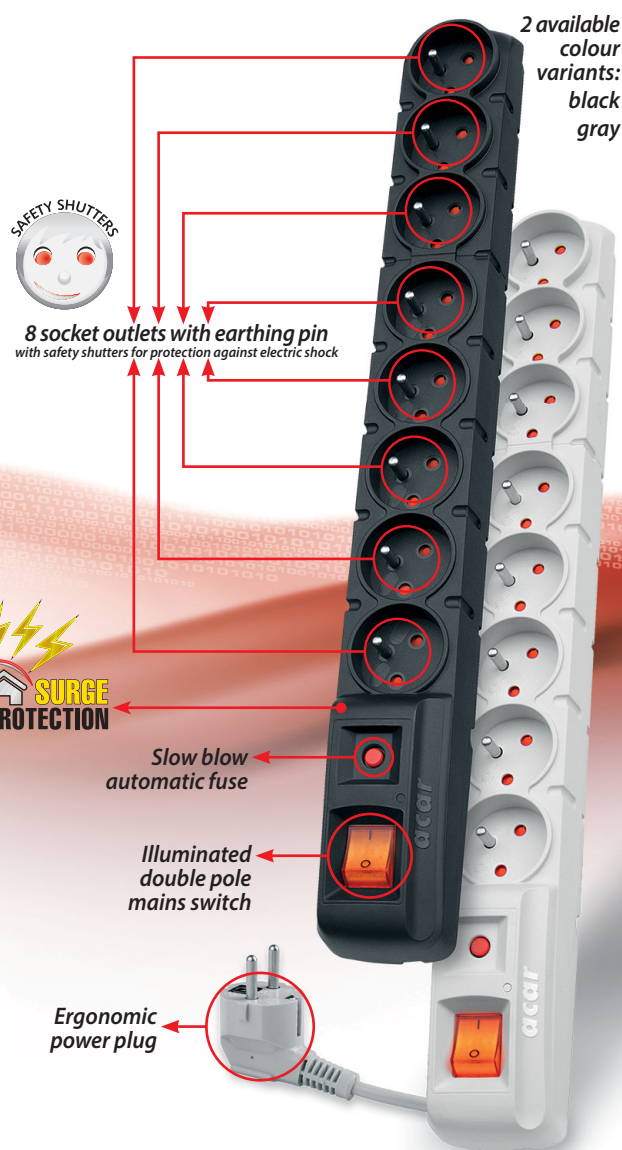

8 socket outlets with earthing pin
with safety shutters for protection against electric shock

2 available
colour
variants:
black
gray



Slow blow
automatic fuse

Illuminated
double pole
mains switch

Ergonomic
power plug



ILLUMINATED DOUBLE
POLE MAINS SWITCH
AND SLOW-BLOW
AUTOMATIC FUSE



8 SOCKET OUTLETS 10A
WITH EARTHING PIN
AND SAFETY SHUTTERS



FOUR POSSIBLE
WAYS OF POWER
CABLE ROUTING AND
OPTIONAL MOUNTING
BRACKETS

The manufacturer reserves the right to change the technical parameters of the device, resulting from technological progress.
ATTENTION! The technical data define the maximum values of surges against which the device protects.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [HSK Data](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [699319-000](#) [M90C108951C](#)
[70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#)
[80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-001000](#)
[803-43-024-10-001000](#) [803-93-012-10-001000](#)