


# acar USB

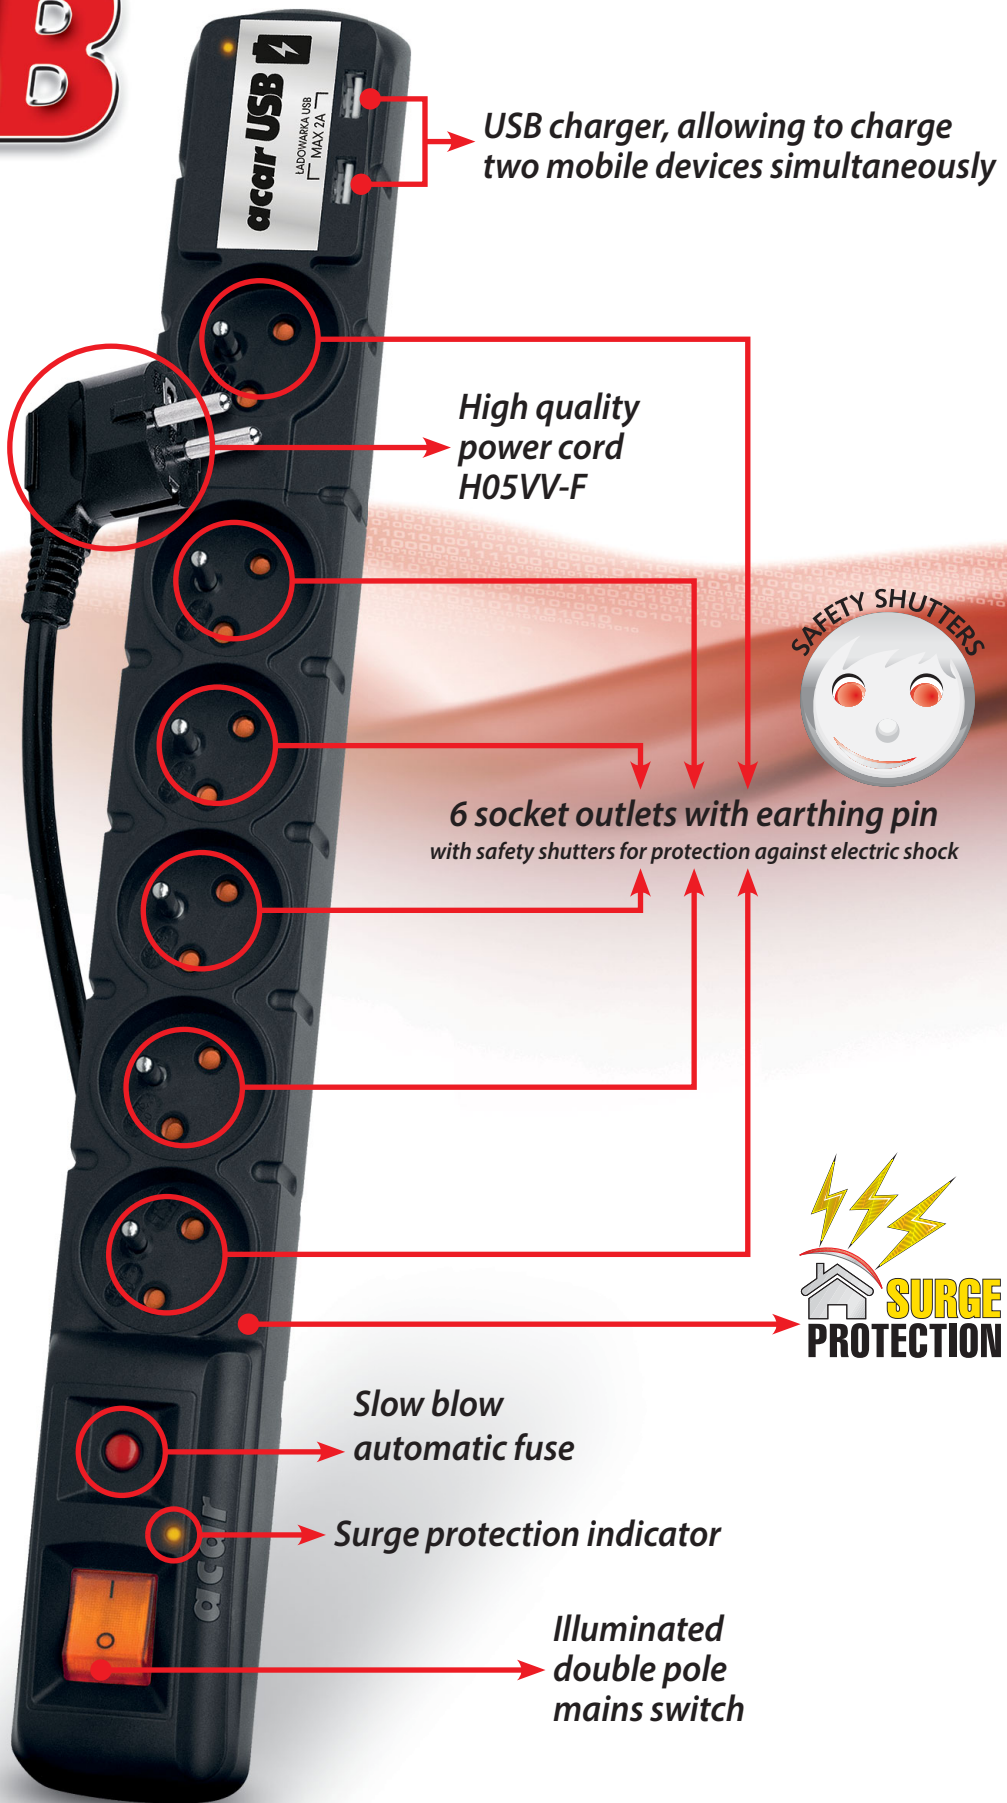

USB charger, allowing to charge two mobile devices simultaneously

High quality power cord H05VV-F

6 socket outlets with earthing pin with safety shutters for protection against electric shock



Slow blow automatic fuse

Surge protection indicator

Illuminated double pole mains switch

**acar**<sup>®</sup>**acar USB**Surge protective power strip  
+ USB charger

black

BUILT-IN USB CHARGER 2A

6 SOCKET OUTLETS WITH EARTHING PIN

SURGE PROTECTION

SURGE PROTECTION INDICATOR

SOCKET OUTLETS SAFE FOR CHILDREN

AUTOMATIC FUSE

ILLUMINATED DOUBLE POLE MAINS SWITCH

AVAILABLE POWER CORD LENGTHS: 1.5m, 3m, 5m

The **acar USB** is a modern surge protective power strip, protecting up to six appliances simultaneously. Additionally, it has been equipped with efficient USB charger, allowing to charge two mobile devices simultaneously. It should be noted that the **acar USB**, like all the acar surge protectors, was made with the utmost care and in accordance with current standards. The USB charger meets the requirements of the electromagnetic compatibility, thus the device does not interfere with other equipment. The indicator of proper operation of the surge protection also increases the certainty that the device effectively protects connected appliances. Six socket outlets, compact design and enhanced functionality allow for versatile use of the **acar USB** at home and in the office.

Technical data: **acar USB**

## Power side:

Maximum load	P <sub>MAX</sub> 2300W
Nominal voltage U <sub>N</sub>	230V
Nominal frequency	50Hz
Nominal load current	ΣI <sub>N</sub> = 10A MAX
Surge protection response time	<25ns
Maximum voltage U <sub>C</sub>	250V 50Hz
Protection level U <sub>p</sub>	≤1.3kV
Nominal discharge current i <sub>N</sub>	2kA (L/N) – 8/20μs
Maximum discharge current i <sub>MAX</sub>	6,5kA(L/N; L(N)/PE) – 8/20μs (type 2)
Fuses	1 automatic fuse, slow blow 10A/250V
Anti-shock protection system	earthing pins connected to the protective earthing conductor
Number of socket outlets	6 two-pole socket outlets with earthing pin, 10A/250V
Switch	illuminated double pole mains switch
Housing	made of self-extinguishing plastic
Dimensions	445x54x55mm
Weight	0.58kg

## USB charger side:

<b>Input</b>	
Nominal input voltage U <sub>N</sub>	100-240V~
Nominal input current I <sub>N</sub>	0.25A
Nominal frequency	50-60 Hz
<b>Output</b>	
Nominal output voltage u <sub>N</sub>	5V ± ±0.25V
Nominal output current	Σi <sub>N</sub> = 2A
Number of USB charging outlets	2


BUILT-IN USB CHARGER 2A



ILLUMINATED DOUBLE POLE MAINS SWITCH AND SURGE PROTECTION INDICATOR



SLOW BLOW AUTOMATIC FUSE AND 6 SOCKETS 10A WITH EARTHING PIN



4 POSSIBLE DIRECTIONS OF ARRANGEMENT OF THE POWER CABLE



The manufacturer reserves the right to change the technical parameters of the device, resulting from technological progress.  
ATTENTION! The technical data define the maximum values of surges against which the device protects.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [HSK Data](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)