

36V, 3.5MHz, 15V/ μ s Precision Rail-to-Rail Input & Output Operational Amplifiers

Description


The HT127X series amplifiers are newest high supply voltage amplifiers with low offset, low power and stable high frequency response. They incorporate HTCSEMI proprietary and patented design techniques to achieve very good AC performance with 3.5MHz bandwidth, 15V/ μ s slew rate and low distortion while drawing only typical 700 μ A of quiescent current per amplifier. The input common-mode voltage range extends to V_{-} , and the outputs swing rail-to-rail. The HT127X family can be used as plug-in replacements for many commercially available op-amps to reduce power and improve input/output range and performance. The combination of features makes the HT127X ideal choices for industrial control, motor control and portable audio amplification, sound ports, and other consumer audio.

Features

- Supply Voltage: 3V to 36V
- Low Supply Current: Maximum 1000 μ A per channel
- Differential Input Voltage Range to Supply Rail, can Work as Comparator
- Input Rail to $-V_s$, Rail to Rail Output
- Fast Response: 3.5 MHz Bandwidth, 15V/ μ s Slew Rate, 100ns Overload Recovery
- Low Offset Voltage:
 - ± 2 mV Maximum at 25 $^{\circ}$ C,
 - ± 2.5 mV Maximum at -40 $^{\circ}$ C to 85 $^{\circ}$ C
 - ± 3 mV Maximum at -40 $^{\circ}$ C to 125 $^{\circ}$ C
- Very Low THD+N: 0.0005% at Gain = 1, 1kHz
- Excellent EMIRR: 60dB at 900MHz
- 2KV HBM, 1KV CDM, 150mA Latch Up
- -40 $^{\circ}$ C to 125 $^{\circ}$ C Operation Temperature Range

Applications

- Sensor Interface
- Motor Control
- Industrial Control
- Audio

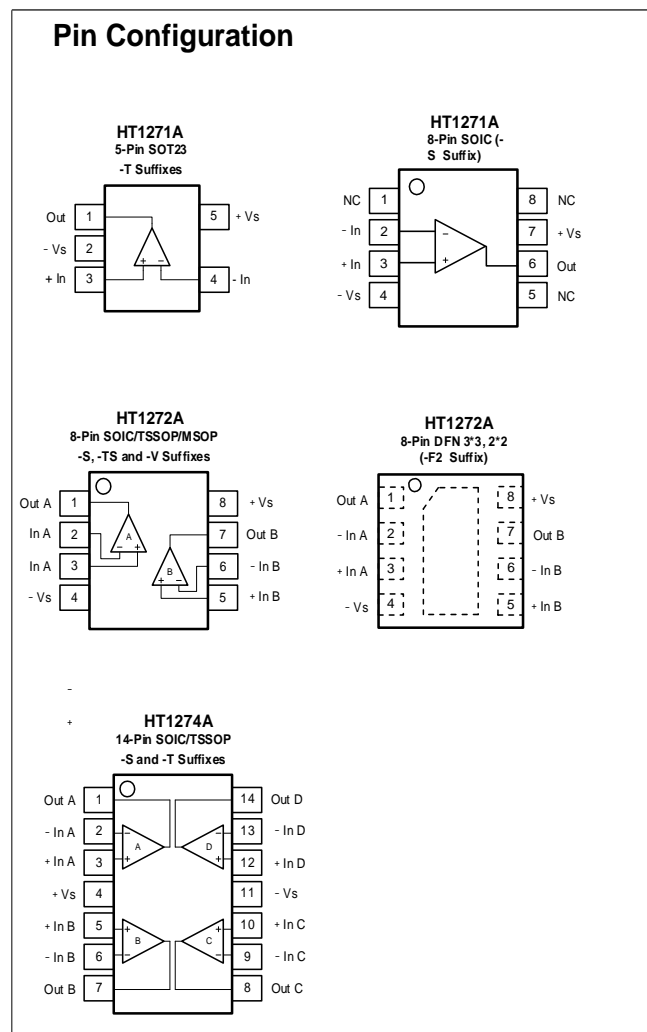

Electrical Characteristics

All test condition is $V_S = 30V$, $T_A = 25^\circ C$, $R_L = 10k\Omega$ to $V_S/2$, unless otherwise noted.

| Symbol | Parameter | Conditions | T_A | Min | Typ | Max | Unit |
|--------------------------------|---------------------------------|-----------------------------------|--------------------------------|------|------|------------|------------------|
| Power Supply | | | | | | | |
| V_S | Supply Voltage Range | | | 3 | | 36 | V |
| I_Q | Quiescent Current per Amplifier | $V_S = 30V, HT1271$ | | | 1000 | 1500 | μA |
| | | | $-40^\circ C$ to $125^\circ C$ | | | 1700 | μA |
| | | $V_S = 5V, HT1271$ | | | 850 | 1300 | μA |
| | | | $-40^\circ C$ to $125^\circ C$ | | | 1500 | μA |
| | | $V_S = 30V, HT1272/HT1274$ | | | 700 | 1000 | μA |
| | | | $-40^\circ C$ to $125^\circ C$ | | | 1200 | μA |
| PSRR | Power Supply Rejection Ratio | $V_S = 3V$ to $36V$ | | 95 | 120 | | dB |
| | | | $-40^\circ C$ to $125^\circ C$ | 90 | | | dB |
| Input Characteristics | | | | | | | |
| V_{OS} | Input Offset Voltage | $V_S = 30V, V_{CM} = 0V$ to $28V$ | | -2 | 0.1 | 2 | mV |
| | | | $-40^\circ C$ to $85^\circ C$ | -2.5 | | 2.5 | mV |
| | | | $-40^\circ C$ to $125^\circ C$ | -3 | | 3 | mV |
| | | $V_S = 30V, V_{CM} = 28.5V$ | | -3 | | 3 | mV |
| | | | $-40^\circ C$ to $125^\circ C$ | -4 | | 4 | mV |
| | | $V_S = 5V, V_{CM} = 2.5V$ | | -2 | 0.1 | 2 | mV |
| $-40^\circ C$ to $125^\circ C$ | -3 | | | 3 | mV | | |
| $V_{OS,TC}$ | Input Offset Voltage Drift | | $-40^\circ C$ to $125^\circ C$ | | 2 | | $\mu V/^\circ C$ |
| I_B | Input Bias Current | | | | 25 | | pA |
| | | | $-40^\circ C$ to $85^\circ C$ | | 80 | | pA |
| | | | $-40^\circ C$ to $125^\circ C$ | | 1000 | | pA |
| I_{OS} | Input Offset Current | | | | 25 | | pA |
| I_{IN} | Different Input Current | $V_S = 36V, V_{ID} = 36V$ | | | 10 | | nA |
| | | | $-40^\circ C$ to $125^\circ C$ | | 100 | | nA |
| C_{IN} | Input Capacitance | Differential Mode | | | 5 | | pF |
| | | Common Mode | | | 2.5 | | pF |
| A_v | Open-loop Voltage Gain | | | 105 | 120 | | dB |
| | | | $-40^\circ C$ to $125^\circ C$ | 100 | | | dB |
| V_{CMR} | Common-mode Input Voltage Range | | | (V-) | | (V+) - 1.5 | V |
| CMRR | Common Mode Rejection Ratio | $V_{CM} = 0V$ to $28V$ | | 105 | 130 | | dB |
| | | | $-40^\circ C$ to $125^\circ C$ | 100 | | | dB |

| Output Characteristics | | | | | | | |
|------------------------|-------------------------------------|--|----------------|----|--------|-----|-------------------|
| V _{OH} | Output Swing from Positive Rail | R _{LOAD} = 10kΩ to V _S /2 | | | 200 | 300 | mV |
| | | | -40°C to 125°C | | | 450 | |
| | | R _{LOAD} = 2kΩ to V _S /2 | | | 1.1 | 1.4 | V |
| | | | -40°C to 125°C | | | 2 | |
| V _{OL} | Output Swing from Negative Rail | R _{LOAD} = 10kΩ to V _S /2 | | | 200 | 300 | mV |
| | | | -40°C to 125°C | | | 450 | |
| | | R _{LOAD} = 2kΩ to V _S /2 | | | 0.8 | 1 | V |
| | | | -40°C to 125°C | | | 1.6 | |
| I _{SC} | Output Short-Circuit Current | | | 25 | 32 | | mA |
| | | | -40°C to 85°C | 20 | | | mA |
| | | | -40°C to 125°C | 15 | | | mA |
| AC Specifications | | | | | | | |
| GBW | Gain-Bandwidth Product | | | | 3.5 | | MHz |
| SR | Slew Rate | G = 1, 10V step | | | 15 | | V/μs |
| | | | Open Loop | | 9 | 15 | |
| | | | -40°C to 85°C | 7 | | | V/μs |
| | | | -40°C to 125°C | 6 | | | V/μs |
| t _{OR} | Overload Recovery | | | | 100 | | ns |
| t _S | Settling Time, 0.1% | G = -1, 10V step | | | 0.8 | | μs |
| | Settling Time, 0.01% | | | | 1 | | μs |
| PM | Phase Margin | V _S = 36V, R _L = 10K, C _L = 100pF | | | 60 | | ° |
| GM | Gain Margin | V _S = 36V, R _L = 10K, C _L = 100pF | | | 15 | | dB |
| Noise Performance | | | | | | | |
| E _N | Input Voltage Noise | f = 0.1Hz to 10Hz | | | 1.7 | | μV _{RMS} |
| e _N | Input Voltage Noise Density | f = 1kHz | | | 30 | | nV/√Hz |
| i _N | Input Current Noise | f = 1kHz | | | 2 | | fA/√Hz |
| THD+N | Total Harmonic Distortion and Noise | f = 1kHz, G = 1, R _L = 10kΩ, V _{OUT} = 6V _{RMS} | | | 0.0005 | | % |

Typical Performance Characteristics

$V_S = \pm 15V$, $V_{CM} = 0V$, $R_L = 10k\Omega$, unless otherwise specified.

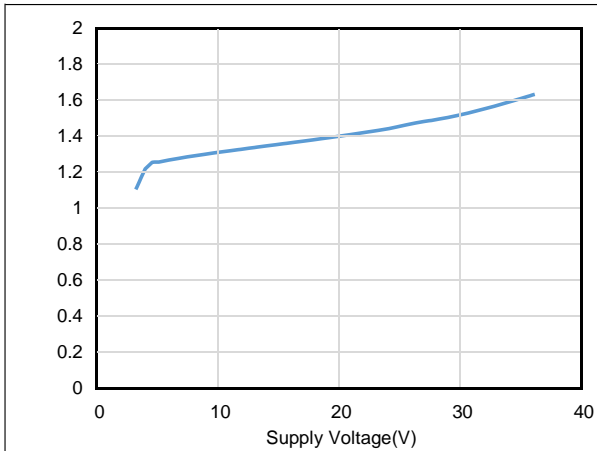


Figure 1. Quiescent Current vs. Supply Voltage, 2ch TP2262

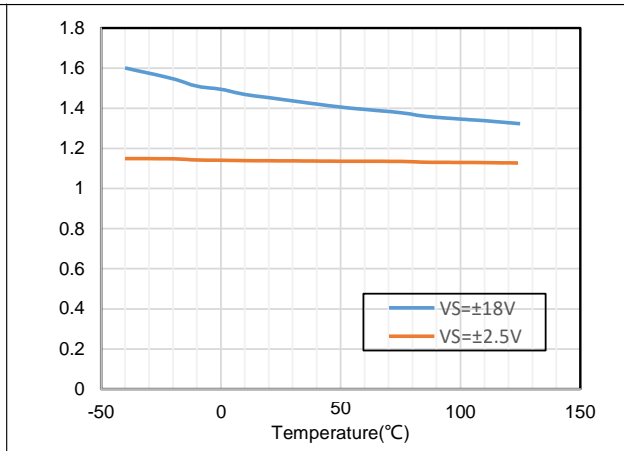


Figure 2. Quiescent Current vs. Temperature, 2ch TP2262

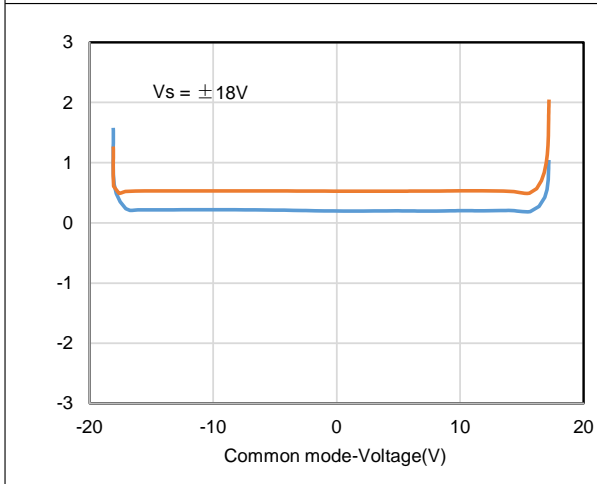


Figure 3. Offset Voltage vs. Common Mode Voltage

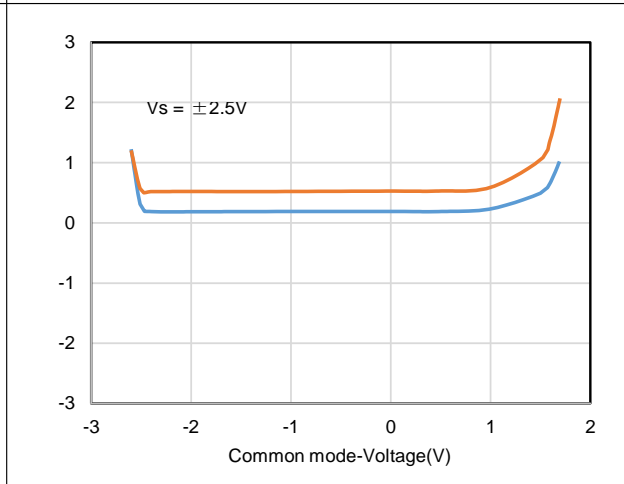


Figure 4. Offset Voltage vs. Common Mode Voltage

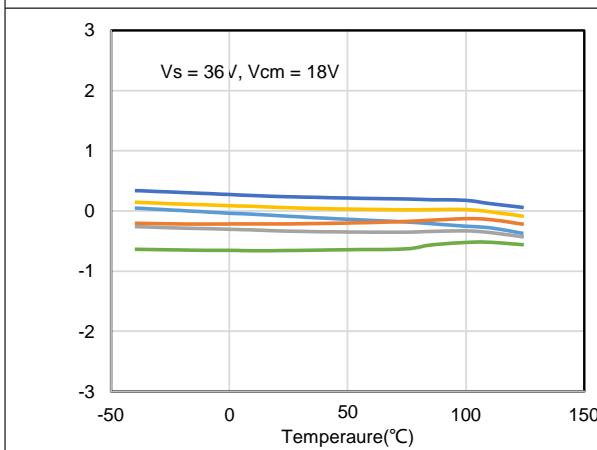


Figure 5. V_{OS} vs. Temperature

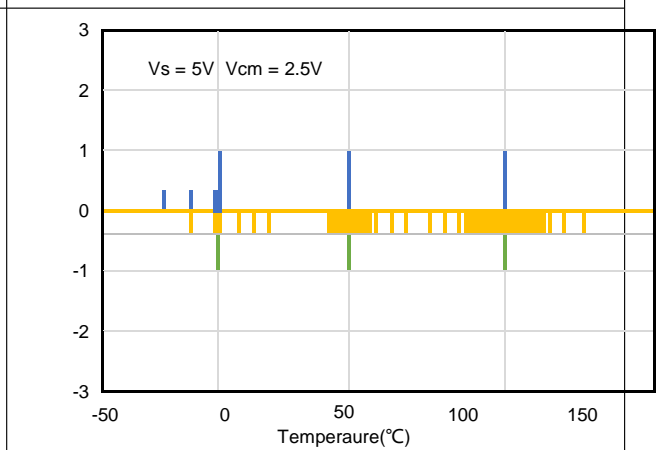


Figure 6. V_{OS} vs. Temperature

$V_s = \pm 15V$, $V_{CM} = 0V$, $R_L = 10k\Omega$, unless otherwise specified.

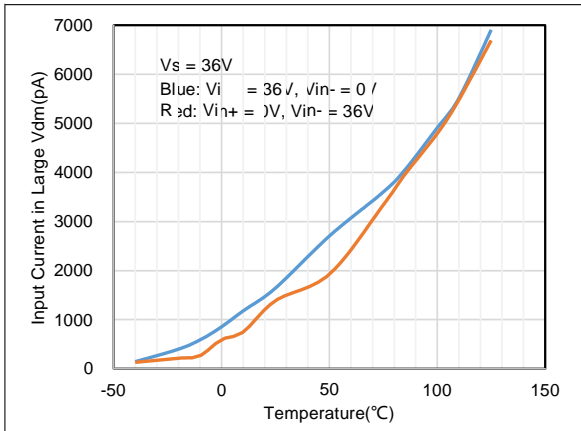


Figure 7. Input Current in Large Vdm vs. Temperature

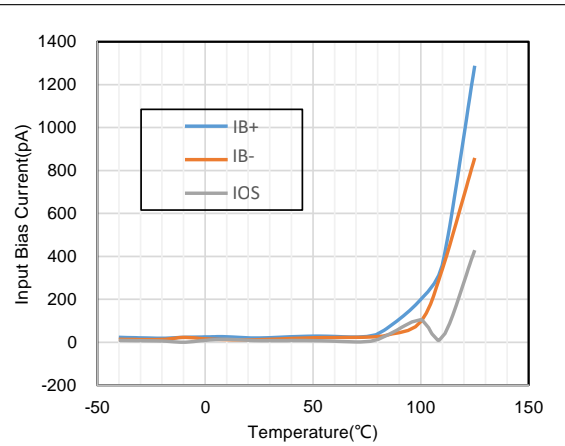


Figure 8. I_B vs. Temperature

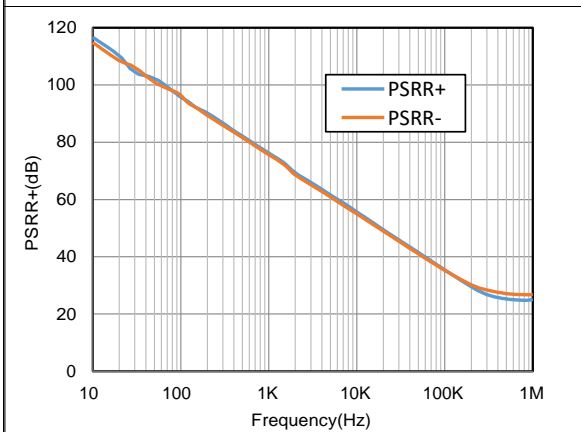


Figure 9. PSRR vs. Frequency

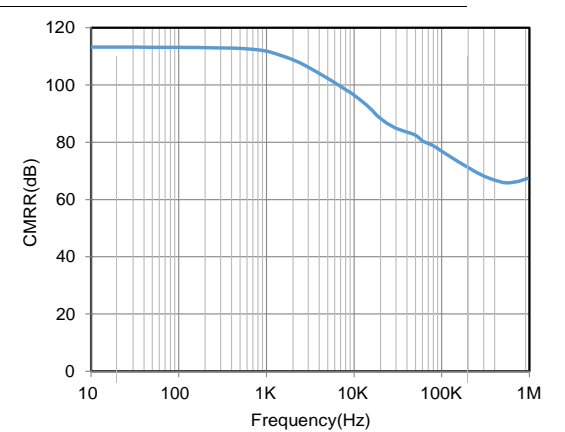


Figure 10. CMRR vs. Frequency

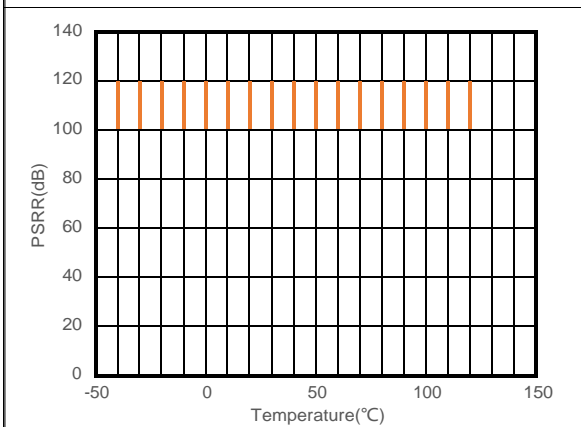


Figure 11. PSRR vs. Temperature







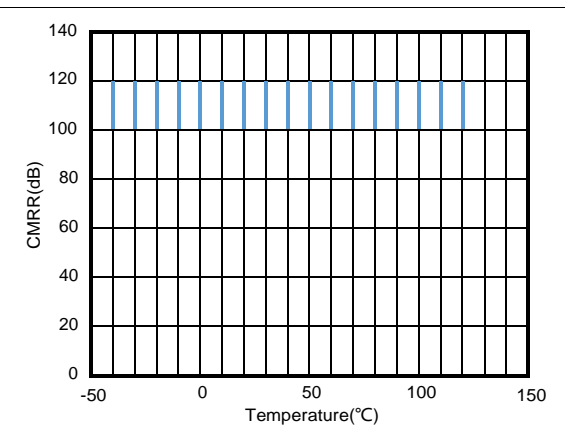


Figure 12. CMRR vs. Temperature

$V_S = \pm 15V$, $V_{CM} = 0V$, $R_L = 10k\Omega$, unless otherwise specified.

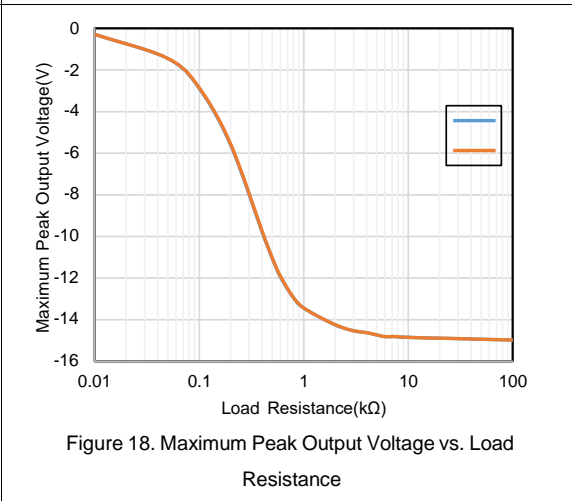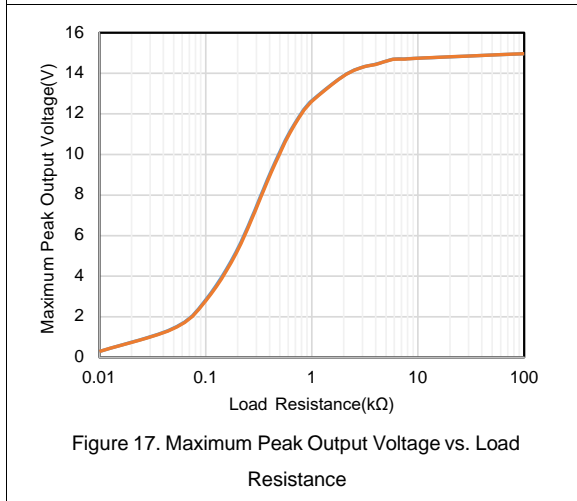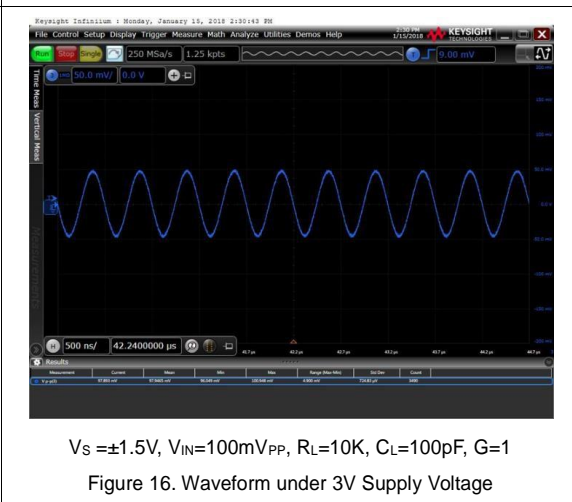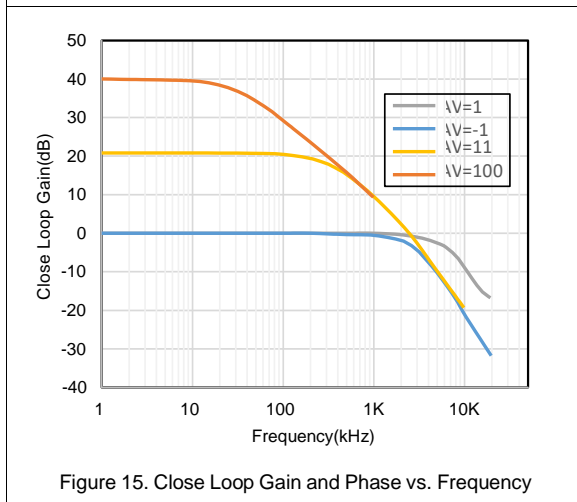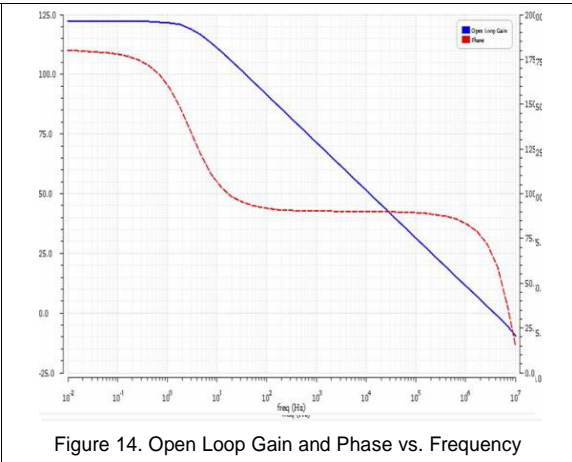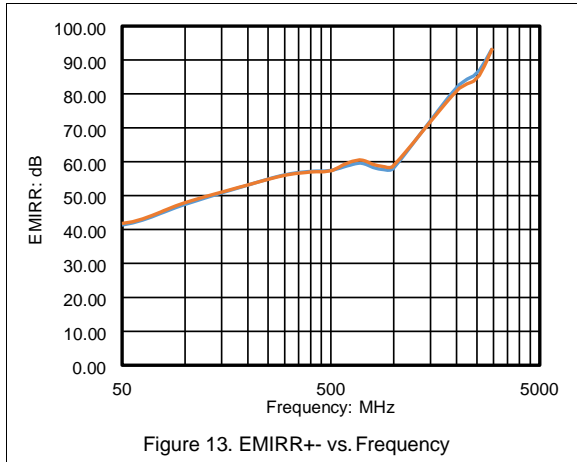

$V_s = \pm 15V, V_{CM} = 0V, R_L = 10k\Omega$, unless otherwise specified.

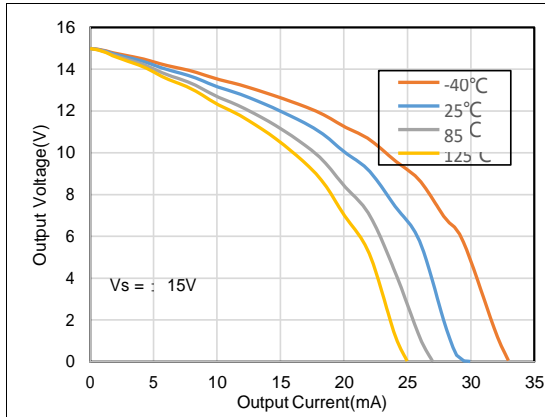


Figure 19. Positive Output Voltage vs. Output Current

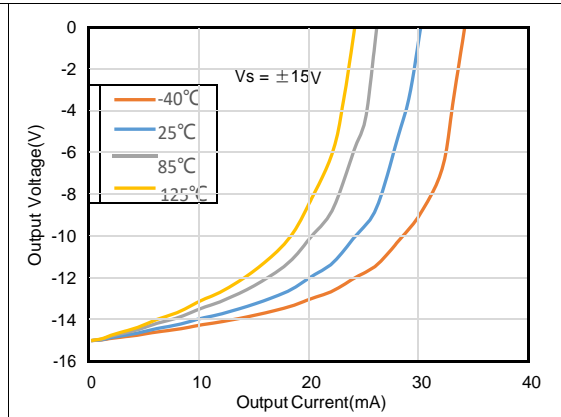


Figure 20. Negative Output Voltage vs. Output Current

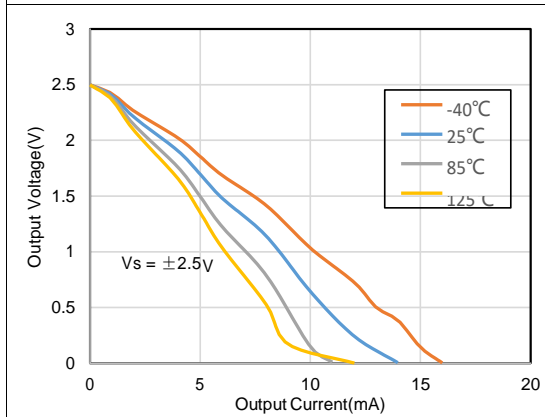


Figure 21. Positive Output Voltage vs. Output Current

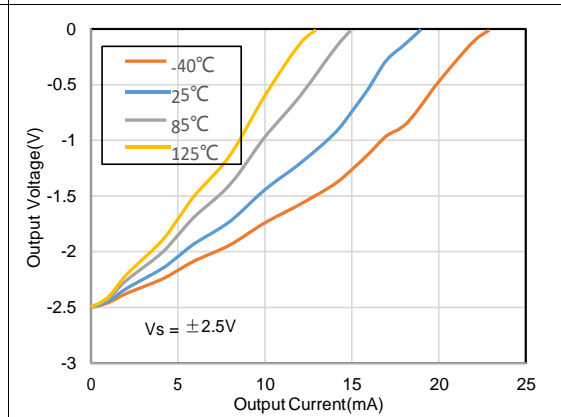


Figure 22. Negative Output Voltage vs. Output Current



Voltage: 1V/div, Time: 200ns/div
 $V_s = 5V, V_{IN} = 2V, R_L = \text{Open}, G = 3$
Figure 23. Positive Overload Recovery




Voltage: 1V/div, Time: 200ns/div
 $V_s = 5V, V_{IN} = 2V, R_L = \text{Open}, G = 3$
Figure 24. Negative Overload Recovery

$V_s = \pm 15V$, $V_{CM} = 0V$, $R_L = 10k\Omega$, unless otherwise specified.



Voltage: 20mV/div, Time: 100ns/div
 $V_s = \pm 15V$, $R_L = 2K$, $C_L = 100pF$, $G = 1$
 Figure 25. 100mV Signal Step Response

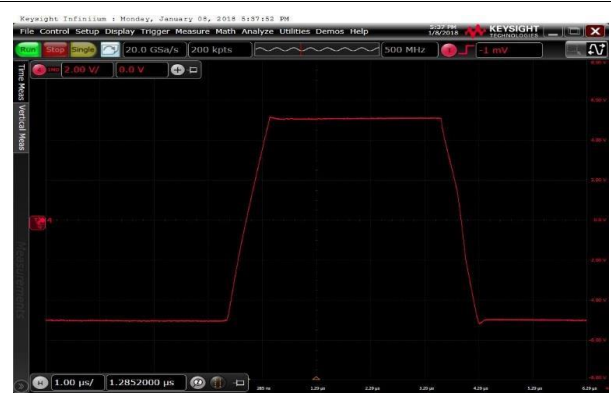

Voltage: 2V/div, Time: 1µs/div
 $V_s = \pm 15V$, $R_L = 2K$, $C_L = 100pF$, $G = 1$
 Figure 26. 10V Signal Step Response

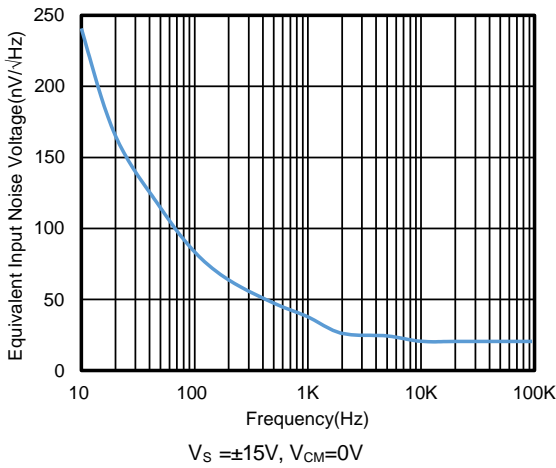


Figure 27. Voltage Noise Spectral Density vs. Frequency
 $V_s = \pm 15V$, $V_{CM} = 0V$

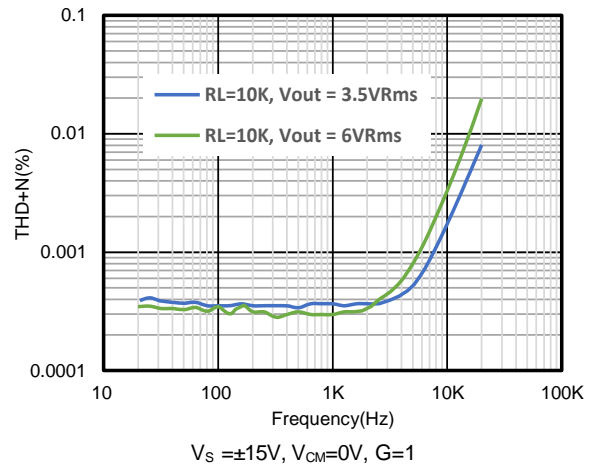


Figure 28. THD+N vs. Frequency
 $V_s = \pm 15V$, $V_{CM} = 0V$, $G = 1$

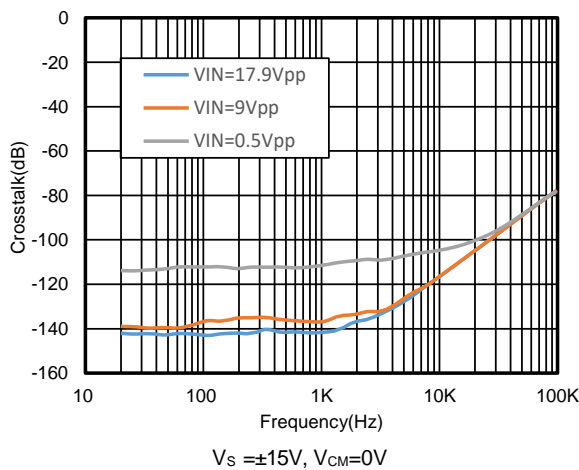
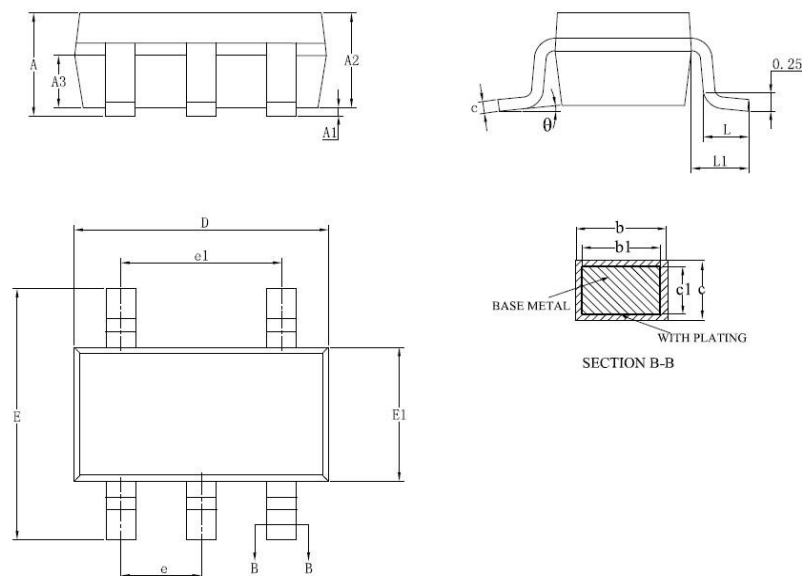
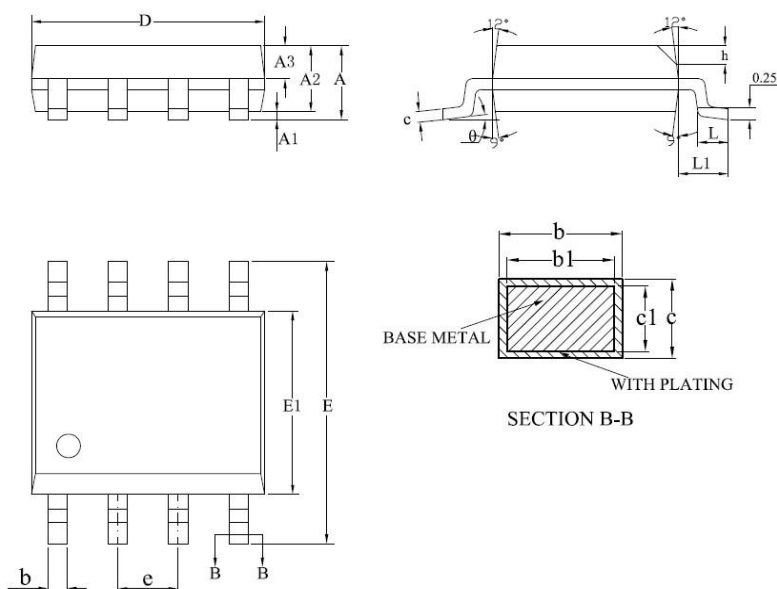






Figure 29. Crosstalk vs. Frequency
 $V_s = \pm 15V$, $V_{CM} = 0V$

SOT23-5



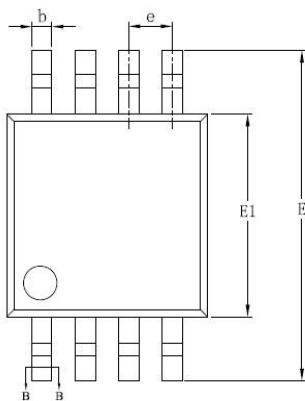
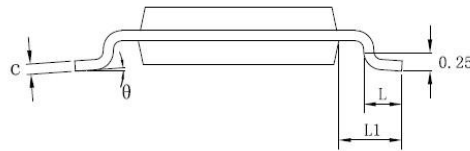

| SYMBOL | MILLIMETER | | |
|----------|------------|------|------|
| | MIN | NOM | MAX |
| A | — | — | 1.25 |
| A1 | 0.04 | — | 0.10 |
| A2 | 1.00 | 1.10 | 1.20 |
| A3 | 0.60 | 0.65 | 0.70 |
| b | 0.33 | — | 0.41 |
| b1 | 0.32 | 0.35 | 0.38 |
| c | 0.15 | — | 0.19 |
| c1 | 0.14 | 0.15 | 0.16 |
| D | 2.82 | 2.92 | 3.02 |
| E | 2.60 | 2.80 | 3.00 |
| E1 | 1.50 | 1.60 | 1.70 |
| e | 0.95BSC | | |
| e1 | 1.90BSC | | |
| L | 0.30 | — | 0.60 |
| L1 | 0.60REF | | |
| θ | 0 | — | 8° |

SOIC-8



| SYMBOL | MILLIMETER | | |
|----------|------------|------|-------|
| | MIN | NOM | MAX |
| A | — | — | 1.75 |
| A1 | 0.10 | — | 0.225 |
| A2 | 1.30 | 1.40 | 1.50 |
| A3 | 0.60 | 0.65 | 0.70 |
| b | 0.39 | — | 0.47 |
| b1 | 0.38 | 0.41 | 0.44 |
| c | 0.20 | — | 0.24 |
| c1 | 0.19 | 0.20 | 0.21 |
| D | 4.80 | 4.90 | 5.00 |
| E | 5.80 | 6.00 | 6.20 |
| E1 | 3.80 | 3.90 | 4.00 |
| e | 1.27BSC | | |
| h | 0.25 | — | 0.50 |
| L | 0.50 | — | 0.80 |
| L1 | 1.05REF | | |
| θ | 0 | — | 8° |

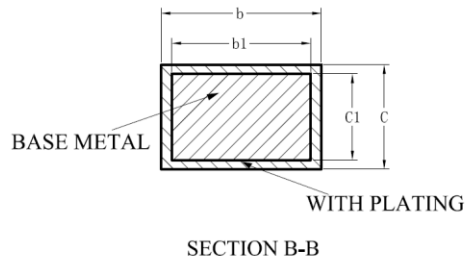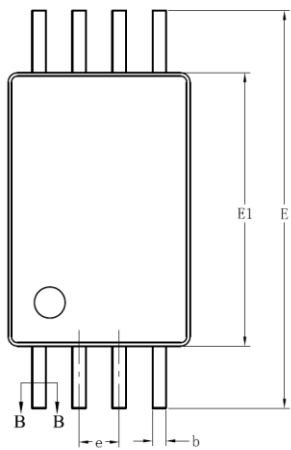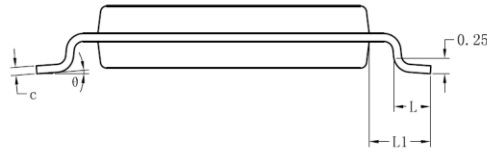TSSOP-8


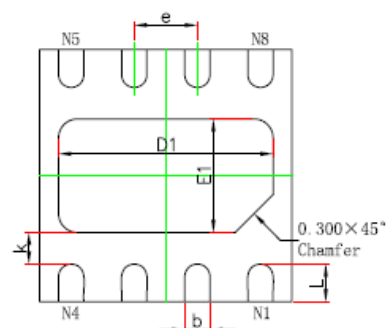
| SYMBOL | MILLIMETER | | |
|--------|------------|------|------|
| | MIN | NOM | MAX |
| A | — | — | 1.20 |
| A1 | 0.05 | — | 0.15 |
| A2 | 0.90 | 1.00 | 1.05 |
| A3 | 0.39 | 0.44 | 0.49 |
| b | 0.20 | — | 0.28 |
| b1 | 0.19 | 0.22 | 0.25 |
| c | 0.13 | — | 0.17 |
| c1 | 0.12 | 0.13 | 0.14 |
| D | 2.90 | 3.00 | 3.10 |
| E1 | 4.30 | 4.40 | 4.50 |
| E | 6.20 | 6.40 | 6.60 |
| e | 0.65BSC | | |
| L | 0.45 | — | 0.75 |
| L1 | 1.00REF | | |
| θ | 0 | — | 8° |

MSOP-8


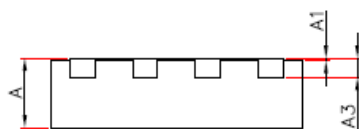
| SYMBOL | MILLIMETER | | |
|--------|------------|------|------|
| | MIN | NOM | MAX |
| A | — | — | 1.10 |
| A1 | 0.05 | — | 0.15 |
| A2 | 0.75 | 0.85 | 0.95 |
| A3 | 0.30 | 0.35 | 0.40 |
| b | 0.28 | — | 0.36 |
| b1 | 0.27 | 0.30 | 0.33 |
| c | 0.15 | — | 0.19 |
| c1 | 0.14 | 0.15 | 0.16 |
| D | 2.90 | 3.00 | 3.10 |
| E | 4.70 | 4.90 | 5.10 |
| E1 | 2.90 | 3.00 | 3.10 |
| e | 0.65BSC | | |
| L | 0.40 | — | 0.70 |
| L1 | 0.95REF | | |
| θ | 0 | — | 8° |

DFN8 2*2


TOP VIEW






BOTTOM VIEW





SIDE VIEW

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Norm. | | Norm. | |
| A | 0.550+/-0.050 | | 0.022+/-0.002 | |
| A1 | 0.000 | 0.050 | 0.000 | 0.002 |
| A3 | 0.152REF. | | 0.006REF. | |
| D | 2.000+/-0.100 | | 0.079+/-0.004 | |
| E | 2.000+/-0.100 | | 0.079+/-0.004 | |
| D1 | 1.700+/-0.100 | | 0.067+/-0.004 | |
| E1 | 0.900+/-0.100 | | 0.035+/-0.004 | |
| k | 0.200MIN. | | 0.008MIN. | |
| b | 0.200+/-0.050 | | 0.008+/-0.002 | |
| e | 0.500TYP. | | 0.020TYP. | |
| L | 0.300+/-0.050 | | 0.012+/-0.002 | |

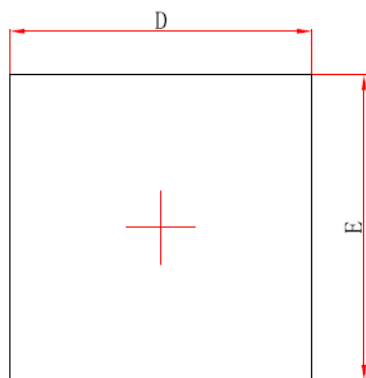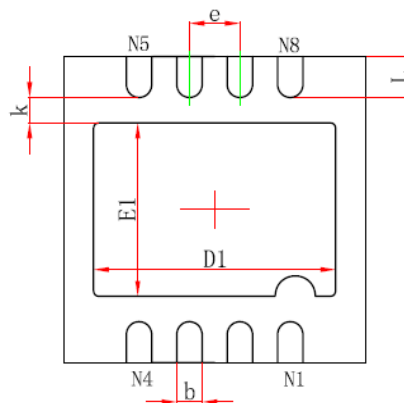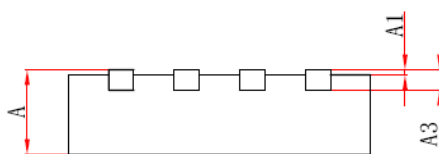DFN8 3*3

Top View

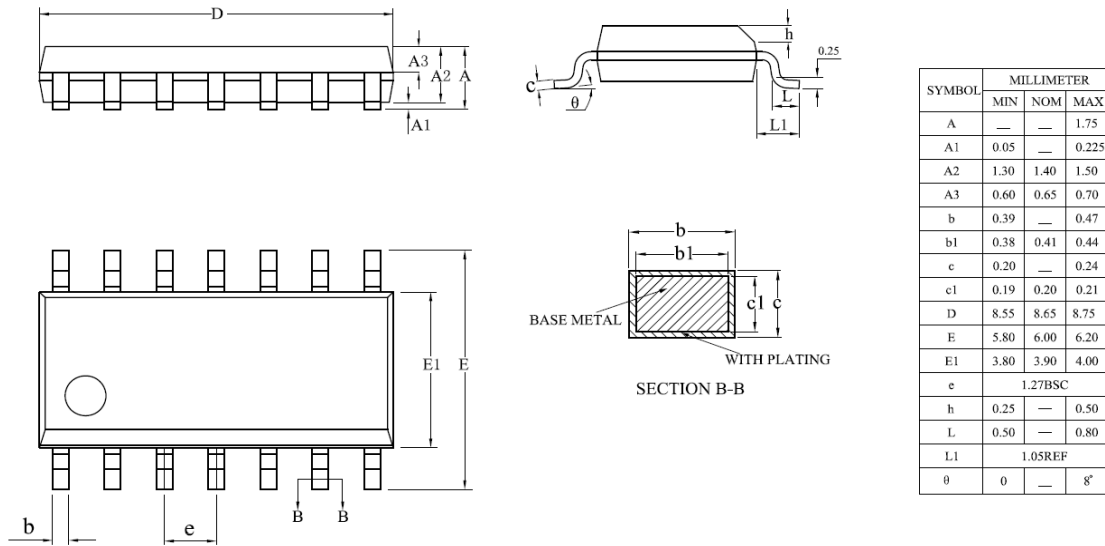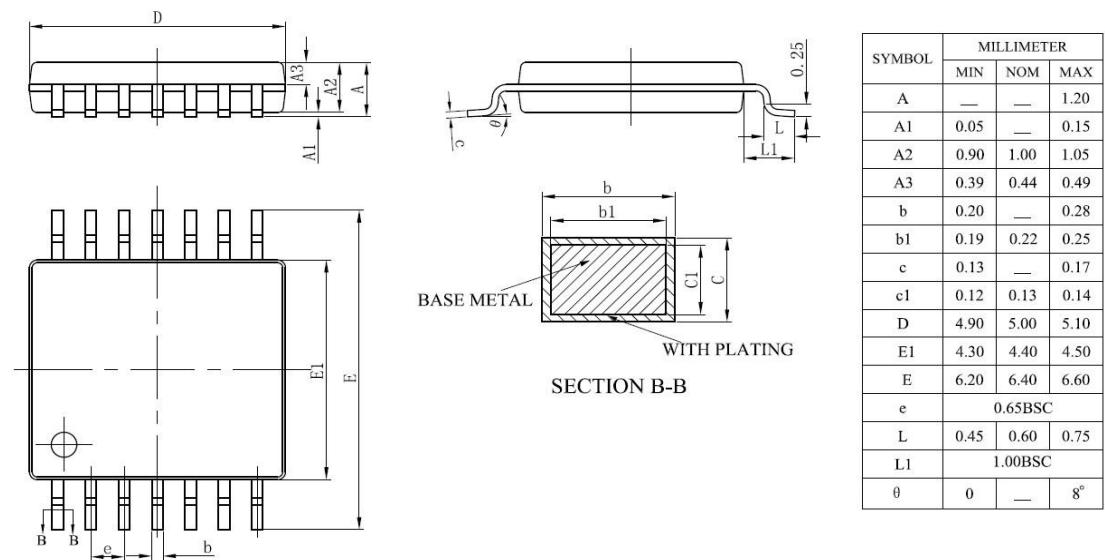Bottom View

Side View

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------------|----------------------|-------------|
| | Min. | Max. | Min. | Max. |
| A | 0.700/0.800 | 0.800/0.900 | 0.028/0.031 | 0.031/0.035 |
| A1 | 0.000 | 0.050 | 0.000 | 0.002 |
| A3 | 0.203REF. | | 0.008REF. | |
| D | 2.924 | 3.076 | 0.115 | 0.121 |
| E | 2.924 | 3.076 | 0.115 | 0.121 |
| D1 | 2.300 | 2.500 | 0.091 | 0.098 |
| E1 | 1.600 | 1.800 | 0.063 | 0.071 |
| k | 0.200MIN. | | 0.008MIN. | |
| b | 0.200 | 0.300 | 0.008 | 0.012 |
| e | 0.500TYP. | | 0.020TYP. | |
| L | 0.324 | 0.476 | 0.013 | 0.019 |

SOIC-14

TSSOP-14


X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Precision Amplifiers](#) category:

Click to view products by [HTCSEMI](#) manufacturer:

Other Similar products are found below :

[LM201AN](#) [NCS20166SN2T1G](#) [MCP6V52-E/MS](#) [ADA4692-4ARUZ-RL](#) [EL8176FSZ](#) [ISL28158FHZ-T7](#) [ISL28236FBZ](#) [ISL28236FBZ-T7](#)
[ISL28258FUZ](#) [ISL28258FUZ-T7](#) [ISL28276FBZ](#) [ISL28276IAZ](#) [ISL28276IAZ-T7](#) [ISL28288FUZ](#) [NCS21914DR2G](#) [NCS21914DTBR2G](#)
[COS2177MR/U](#) [COS8552SRA](#) [COSOP27SRA](#) [COS8554SRB](#) [COS2177MR/UA](#) [COS2388SRA](#) [COSOP27SRB](#) [COS2376SRA](#) [COS2277SR](#)
[COS4277TR](#) [COS8602SR](#) [COS8606](#) [COS4177SR](#) [COS2335SRC](#) [COS2387SRB](#) [COS8629](#) [COS2335SRB](#) [COS2376SRB](#) [COS2340SR](#)
[COS2387SRC](#) [COS2335SRA](#) [COS2387SRA](#) [COS2376SRC](#) [COS277SR](#) [COSOP27SRC](#) [OPA2177M/TR](#) [HG376M5/TR](#) [RS8654XP](#)
[SLA333](#) [OPA2335](#) [LTC6362IMS8#TRPBF](#) [COS8552SRC](#) [COS8554TRB](#) [COS4277SR](#)