




**MICROCIRCUIT HT3232AN, HT3232AR INTERFACE
TRANSCEIVER OF THE SERIAL DATA OF THE STANDARD RS - 232
(compatible to MAX3232 (MAXIM USA))**

Microcircuits HT3232A is interface transceiver of serial data under RS - 232 standard with single power supply source & bipolar output voltage of transmitter, forming by build-in voltage multiplier on 4 external capacities, 0.1 μ F. HT3232A correspond to EIA/TIA-232E, V.28 standard and is purposed for application in modern high efficient calculating systems with the wide range of supply voltage, fast-operating electronic devices with high level of fidelity of information exchange among distant devices.

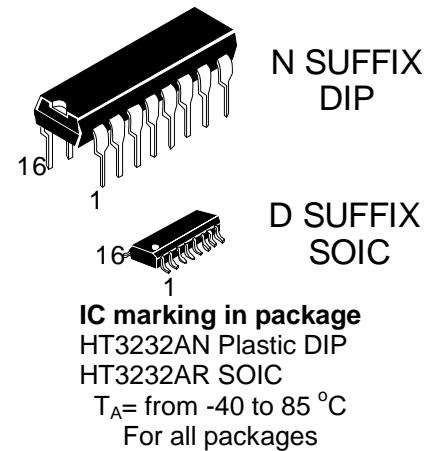

Functions and structure:


- Microcircuit contains 2 transmitters and 2 receivers of the serial data of the standard RS-232.
- The microcircuit supply voltage range is from 3.0 to 5.5 V.
- The microcircuits is available in 16-pin DIP-package (MS-001BB). 16-pin SO-package (MS-012AC).

Truth Table

| Input | Output |
|------------|--|
| RXIN, TXIN | $\overline{\text{RXOUT}}, \overline{\text{TXOUT}}$ |
| H | L |
| L | H |


Note –
L – low voltage level;
H – high voltage level

Pinning

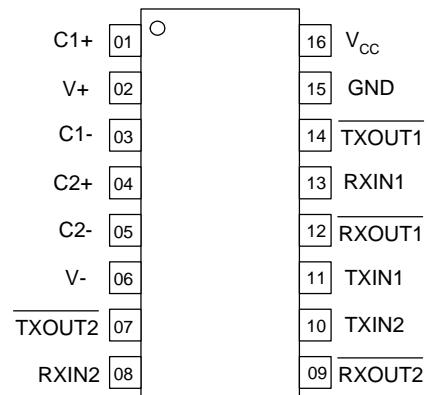



Functional diagram

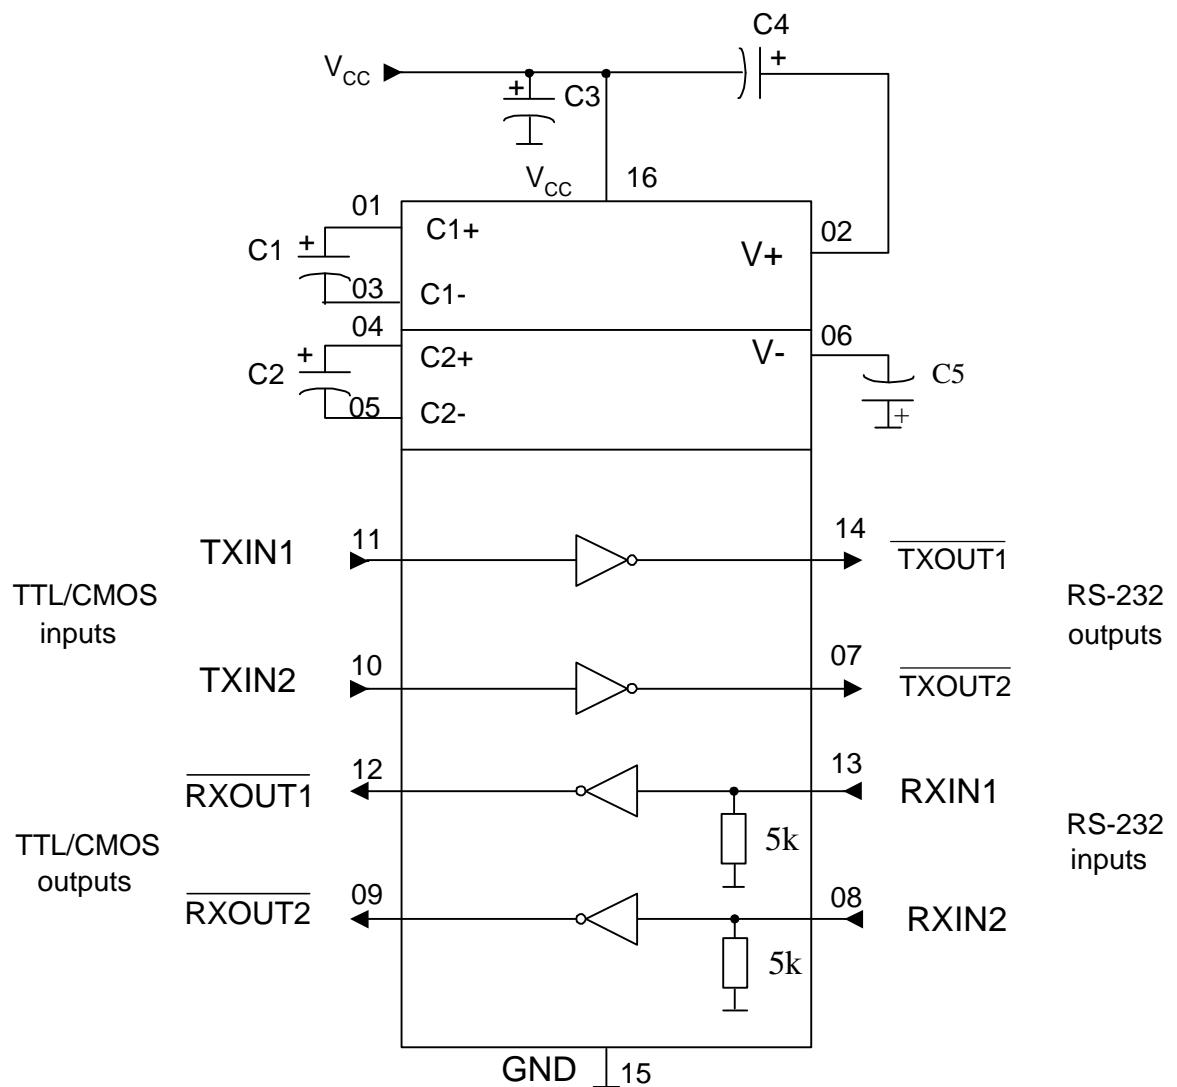

C1 – capacitor $0.1 \mu\text{F} \pm 10\%$ for $U_{CC} = 3.3 \text{ V} \pm 10\%$ ($0.047 \mu\text{F} \pm 10\%$ for $U_{CC} = 5.0 \text{ V} \pm 10\%$)

C2, C4, C5 – capacitors $0.1 \mu\text{F} \pm 10\%$ for $U_{CC} = 3.3 \text{ V} \pm 10\%$ ($0.33 \mu\text{F} \pm 10\%$ for $U_{CC} = 5.0 \text{ V} \pm 10\%$)

C3 – capacitor $0.1 \mu\text{F} \pm 10\%$

Pin description table

| Pin number | Pin description | Symbol |
|------------|---|-----------------|
| 01 | Positive terminal of the voltage multiplier charge-pump capacitor | C1+ |
| 02 | Positive voltage multiplier output | V+ |
| 03 | Negative terminal of the voltage multiplier charge-pump capacitor | C1- |
| 04 | Positive terminal of the voltage multiplier charge-pump capacitor | C2+ |
| 05 | Negative terminal of the voltage multiplier charge-pump capacitor | C2- |
| 06 | Negative voltage multiplier output | V- |
| 07 | Transmitter output (RS-232 levels) | TXOUT2 |
| 08 | Receiver input (RS-232 levels) | RXIN2 |
| 09 | Receiver output (TTL/CMOS levels) | RXOUT2 |
| 10 | Transmitter input (TTL/CMOS levels) | TXIN2 |
| 11 | Transmitter input (TTL/CMOS levels) | TXIN1 |
| 12 | Receiver output (TTL/CMOS levels) | RXOUT1 |
| 13 | Receiver input (RS-232 levels) | RXIN1 |
| 14 | Transmitter output (RS-232 levels) | TXOUT1 |
| 15 | Common pin | GND |
| 16 | Supply voltage | V _{CC} |

Maximum Ratings & Recommended Operating Conditions

| Parameter, unit | Symbol | Recommended operating conditions | | Maximum rate | |
|--|---------------------------------|--|-----------------|--------------|----------------------|
| | | min | max | min | max |
| Supply voltage, V | U _{CC} | 3.0 | 5.5 | -0.3 | 6.0 |
| Voltage applied to transmitter output, V | U _{OT} | — | — | -13.2 | 13.2 |
| Multiplier positive output voltage, V | U ₊ | 5.0 | — | -0.3 | 7.0 |
| Multiplier negative output voltage, V | U ₋ | -5.0 | — | -7.0 | 0.3 |
| Receiver input voltage, V | U _{IR} | -25 | 25 | -25 | 25 |
| Receiver output voltage, V | U _{OR} | — | — | -0.3 | U _{CC} +0.3 |
| Transmitter low level input voltage, V | U _{IL} | 0 | 0.8 | -0.3 | — |
| Transmitter high level input voltage, V | U _{IH} | 2.0 (U _{CC} =3.3 V) 2.4 (U _{CC} =5.0 V) | U _{CC} | — | 6 |
| Multiplier outputs voltages difference, V | U ₊ + U ₋ | — | — | — | 13 |
| Receiver low level threshold input voltage, V | U _{ITL} | 0.6 (U _{CC} =3.3 V) 0.8 (U _{CC} =5.0 V) | — | — | — |
| Receiver high level threshold input voltage, V | U _{ITH} | — | 2.4 | — | — |



Electric parameters

| Parameter, unit | Symbol | Norm | | Mode | $T_A, ^\circ C$ |
|---|----------------------|------|-------|--|-----------------|
| | | Min | Max | | |
| Supply current, μA | I_{CC1} | - | 1.0 | $U_{CC} = 3.3 V; 5.0 V;$ $U_{IL} = 0 V$ | 25 ± 10 |
| | | | 1.4 | | $-40; 85$ |
| Receiver | | | | | |
| Low level output voltage, V | U_{OLR} | - | 0.3 | $U_{CC} = 3.3V \pm 10\%; U_{ITH} = 2.4V;$ $I_{OL} = 1.6 mA$ | 25 ± 10 |
| | | | 0.4 | | $-40; 85$ |
| | | | 0.3 | $U_{CC} = 5.0V \pm 10\%; U_{ITH} = 2.4V;$ $I_{OL} = 1.6 mA$ | 25 ± 10 |
| | | | 0.4 | | $-40; 85$ |
| High level output voltage, V | U_{OHR1} | 2.5 | - | $U_{CC} = 3.3V \pm 10\%; U_{ITL} = 0.6 V;$ $I_{OH} = -1.0 mA$ | 25 ± 10 |
| | | 2.4 | | | $-40; 85$ |
| | U_{OHR2} | 4.0 | - | $U_{CC} = 5.0V \pm 10\%; U_{ITL} = 0.8 V;$ $I_{OH} = -1.0 mA$ | 25 ± 10 |
| | | 3.9 | | | $-40; 85$ |
| Receiver hysteresis, V | U_{hR} | 0.2 | 1.0 | $U_{CC} = 3.3 V \pm 10\%; 5.0 V \pm 10\%$ | |
| Input resistance, kOhm | R_I | 3 | 7 | - | |
| OFF-ON switching propagation delay, ns | t_{PHLR}, t_{PLHR} | - | 1500 | $U_{CC} = 5.0V \pm 10\%;$ $C_L = 150 pF;$ | |
| Propagation delays difference, ns | t_{SKD} | - | 600 | $U_{IL} = 0 V;$ $U_{IH} = 3.0 V;$ $t_{LH} = t_{HL} \leq 10 ns$ | |
| Transmitter | | | | | |
| Low level output voltage, V | U_{OLT1} | - | -5.07 | $U_{CC}=3.3V \pm 10\%; U_{IH} = 2.0V;$ $R_L = 3 kOhm$ | 25 ± 10 |
| | | | -5.0 | | $-40; 85$ |
| | U_{OLT2} | - | -5.07 | $U_{CC}=5.0V \pm 10\%; U_{IH} = 2.4V;$ $R_L = 3 kOhm$ | 25 ± 10 |
| | | | -5.0 | | $-40; 85$ |
| High level output voltage, V | U_{OHT} | 5.07 | - | $U_{CC}=3.3V \pm 10\%; U_{IL} = 0.8V;$ $R_L = kOhm$ | 25 ± 10 |
| | | 5.0 | | | $-40; 85$ |
| | | 5.07 | - | $U_{CC}=5.0V \pm 10\%; U_{IL} = 0.8V;$ $R_L = kOhm$ | 25 ± 10 |
| | | 5.0 | | | $-40; 85$ |
| Transmitter hysteresis, V | U_{hT} | 0.1 | 1.0 | $U_{CC} = 3.3 V \pm 10\%; 5.0 V \pm 10\%$ | |
| Low level input leakage current, μA | I_{ILL} | - | -0.5 | $U_{CC} = 5.5 V; U_{IL} = 0V$ | 25 ± 10 |
| | | | -1.0 | | $-40; 85$ |
| High level input leakage current, μA | I_{ILH} | - | 0.5 | $U_{CC} = 5.5 V; U_{IH} = 5.5V$ | 25 ± 10 |
| | | | 1.0 | | $-40; 85$ |
| Output resistance , Ohm | R_O | 350 | - | $U_{CC} = U_{V+}^* = U_{V-}^* = 0 V;$ $U_O = \pm 2 V$ | 25 ± 10 |
| | | 300 | | | $-40; 85$ |




Electric parameters


| Parameter, unit | Symbol | Norm | | Mode | $T_A, ^\circ C$ |
|--|------------|------|-----|--|-----------------|
| | | Min | Max | | |
| Transmitter | | | | | |
| Short circuit current, mA | I_{OS} | - | 53 | $U_{CC} = 3.6 V$ | 25 ± 10 |
| | | | 60 | | -40; 85 |
| | | | -53 | $U_{CC} = 3.6 V$ | 25 ± 10 |
| | | | -60 | | -40; 85 |
| | | | 53 | $U_{CC} = 5.5 V$ | 25 ± 10 |
| | | | 60 | | -40; 85 |
| | | | -53 | $U_{CC} = 5.5 V$ | 25 ± 10 |
| | | | -60 | | -40; 85 |
| Low level output current for OFF-state, μA | I_{OZLT} | - | -10 | $U_{CC} = 0V;$ $U_O = -12 V;$ transmitter output is disabled | 25 ± 10 |
| | | | -25 | | -40; 85 |
| High level output current for OFF-state, μA | I_{OZHT} | - | 10 | $U_{CC} = 0V;$ $U_O = 12 V;$ transmitter output is disabled | 25 ± 10 |
| | | | 25 | | -40; 85 |
| Maximum Data Rate, Kbit/s | ST | 140 | - | $R_L = 3 kOhm; C_L = 1000 pF$ | 25 ± 10 |
| | | 120 | | | -40; 85 |
| Transition-Region Slew Rate, $V/\mu s$ | SR | 6 | 30 | $U_{CC} = 3.3 V; R_L = (3-7) kOhm;$ U_{OT} is from +3 to -3 V or from -3 to +3 V; $C_L = (150-1000) pF$ | 25 ± 10 |
| | | 4 | 30 | | |
| Propagation delays difference, ns | t_{SKEW} | - | 600 | $U_{CC} = 5.0V \pm 10\%;$ $U_{IL} = 0 V; U_{IH} = 3.0 V;$ $t_{LH} = t_{HL} \leq 10 ns;$ $R_L = 3 kOhm; C_L = 1000 pF$ | |
| | | | | | |

* U_{V+}, U_{V-} - voltages applied to pins 02, 06.


Note – Electric parameters is indicated for $C1=0.047 \mu F$, $C2-C4 = 0.33 \mu F$ & $U_{CC} = 5.0 V \pm 10\%$ (or $C1-C4 = 0.1 \mu F$ & $U_{CC} = 3.3 V \pm 10\%$)

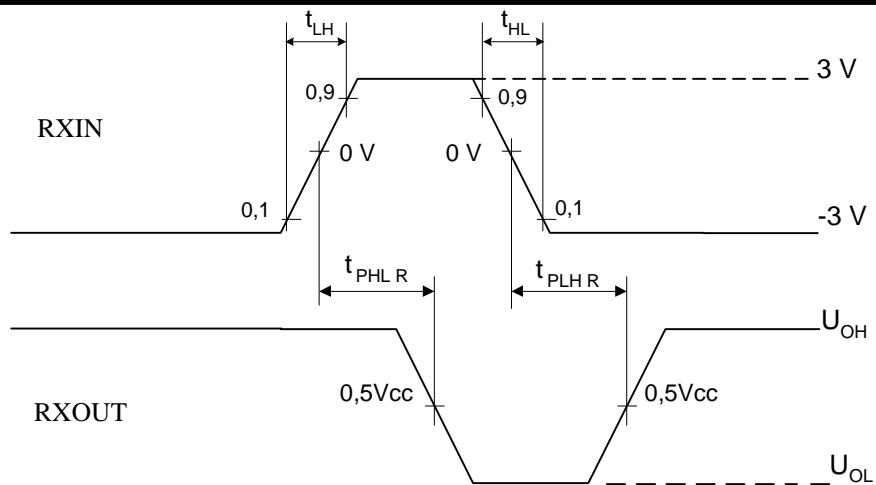




Receiver output & input signals time diagram

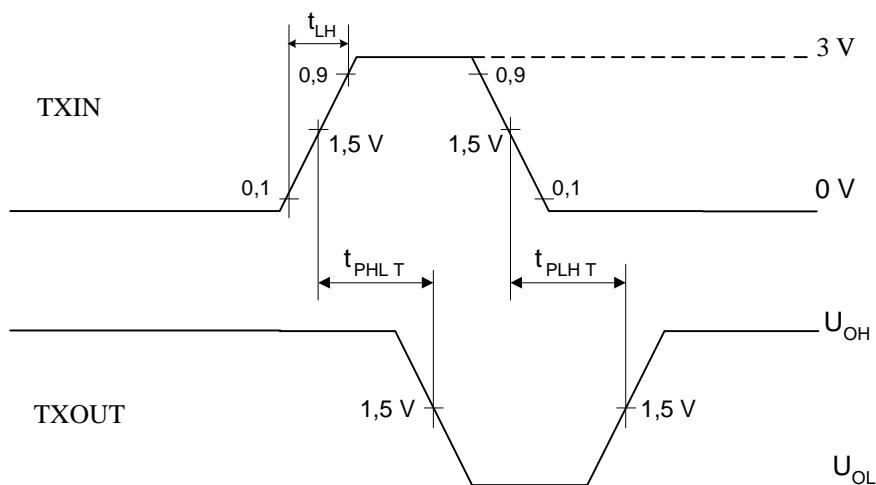

Transmitter output & input signals time diagram

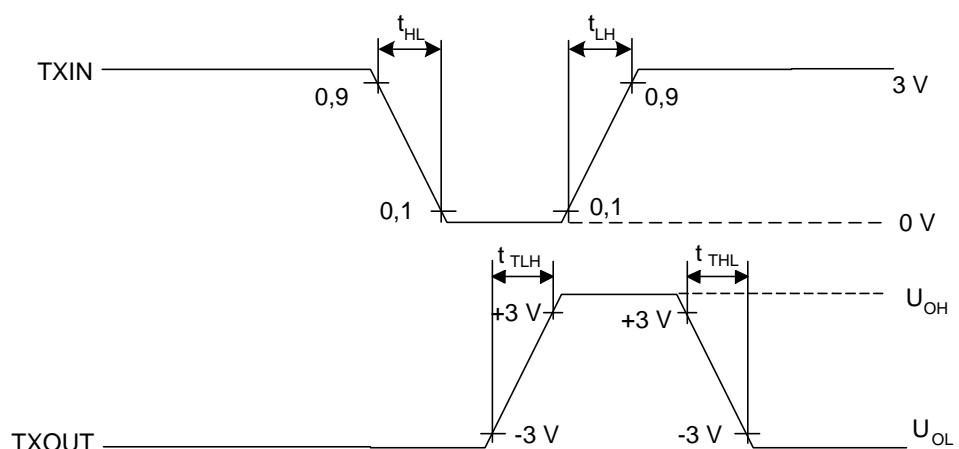


Transmitter output & input signals time diagram

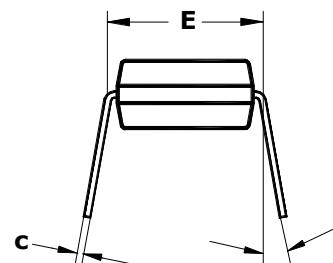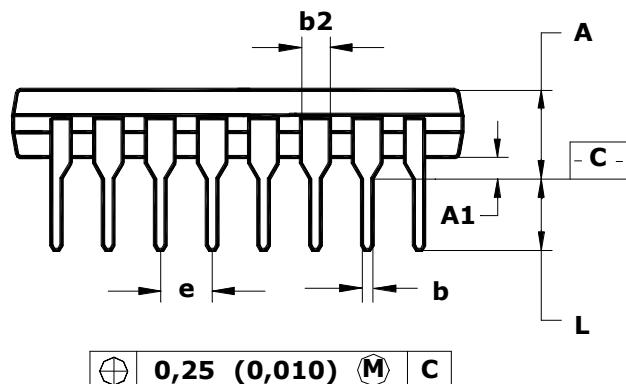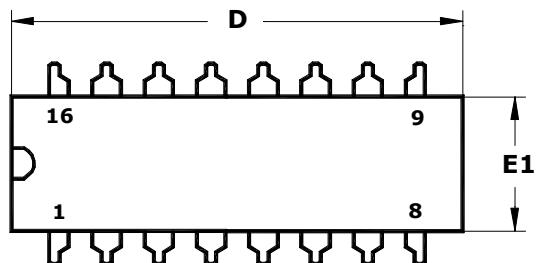**Package Dimensions**
DIP-package MS-001BB

Note - Dimensions D, E1 do not include the fin value, which should not exceed 0.25 mm (0.010) per side.

| | D | E1 | A | b | b2 | e | α | L | E | c | A1 |
|--------|-------|-------|-------|-------|-------|------|----------|-------|-------|-------|-------|
| mm | | | | | | | | | | | |
| min | 18.93 | 6.07 | — | 0.36 | 1.14 | 2.54 | 0° | 2.93 | 7.62 | 0.20 | 0.38 |
| max | 19.43 | 7.11 | 5.33 | 0.56 | 1.78 | | 15° | 3.81 | 8.26 | 0.36 | — |
| Inches | | | | | | | | | | | |
| min | 0.355 | 0.240 | — | 0.014 | 0.045 | 0.1 | 0° | 0.115 | 0.300 | 0.008 | 0.015 |
| max | 0.400 | 0.280 | 0.210 | 0.022 | 0.070 | | 15° | 0.150 | 0.325 | 0.014 | — |

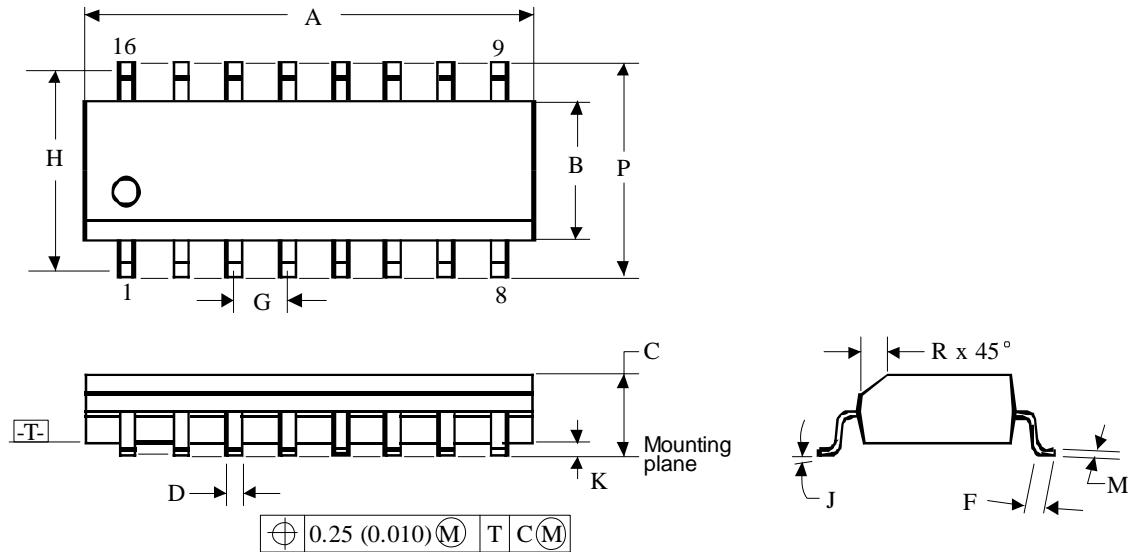**Package Dimensions**
SO-package MS-012AC**Note:**

1. Dimensional sizes A and B are preset without consideration of fin and the metal bulges.
2. Availability of the fin and the metal bulges for A – up to 0.15 mm (0.006) per side; for B – up to 0.25 mm (0.010) per side.

| Identifi- cation | Sizes, mm | |
|---------------------|-----------|------|
| | MIN | MAX |
| A | 9.80 | 10.0 |
| B | 3.80 | 4.00 |
| C | 1.35 | 1.75 |
| D | 0.33 | 0.51 |
| F | 0.40 | 1.27 |
| G | 1.27 | |
| H | 5.72 | |
| J | 0° | 8° |
| K | 0.10 | 0.25 |
| M | 0.19 | 0.25 |
| P | 5.80 | 6.20 |
| R | 0.25 | 0.50 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RS-232 Interface IC category:

Click to view products by HTCSEMI manufacturer:

Other Similar products are found below :

[062191EB](#) [XR32330EBERTR-F](#) [HIN202CB](#) [HIN202CBN](#) [HIN202EIB](#) [HIN206CB](#) [HIN206EIA](#) [HIN207EIAZ](#) [HIN207EIBZ](#) [HIN208ECB](#)
[HIN213EIB](#) [HIN232ACB](#) [HIN232ACBN](#) [HIN232ACP](#) [HIN232CB](#) [HIN232ECP](#) [HIN232IB](#) [HIN232IP](#) [HIN238CB](#) [HIN239CB](#) [HIN241CA](#)
[ICL232CBE](#) [ICL232IBE](#) [ICL3207ECA](#) [ICL3217ECB](#) [ICL3221CV](#) [ICL3221ECA](#) [ICL3221ECV](#) [ICL3221IA](#) [ICL3223CA](#) [ICL3223ECA](#)
[ICL3223IA](#) [ICL3225ECA](#) [ICL3232CA](#) [ICL3232CP](#) [ICL3232CV](#) [ICL3232ECB](#) [ICL3232IBN](#) [ICL3232IV](#) [ICL3237CA](#) [ICL3237ECA](#)
[ICL3238ECA](#) [ICL3241ECA](#) [ICL3243CA](#) [ICL3243CB](#) [ICL3243ECA](#) [ICL3243ECB](#) [ICL3243ECV](#) [ICL3243IA](#) [ICL3245ECA](#)