


## GENERAL PURPOSE SINGLE OPERATIONAL AMPLIFIER

### FEATURES

- Large input voltage range
- No latch-up
- High gain
- Short-circuit protection
- No frequency compensation


### PIN CONNECTIONS

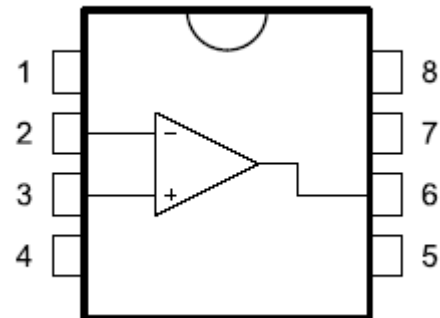


### PIN LOCATION AND FUNCTIONAL PURPOSE

| PIN                |      | I/O | DESCRIPTION  |
|--------------------|------|-----|--|
| NAME               | NO.  |     |  |
| INVERTING INPUT    | 2    | I   | Inverting signal input   |
| NC                 | 8    | N/A | No Connect, should be left floating  |
| NONINVERTING INPUT | 3    | I   | Noninverting signal input  |
| OFFSET NULL        | 1, 5 | I   | Offset null pin used to eliminate the offset voltage and balance the input voltages. |
| OFFSET NULL        |      |     |  |
| OUTPUT             | 6    | O   | Amplified signal output  |
| V+                 | 7    | I   | Positive supply voltage  |
| V-                 | 4    | I   | Negative supply voltage  |

Typical Application

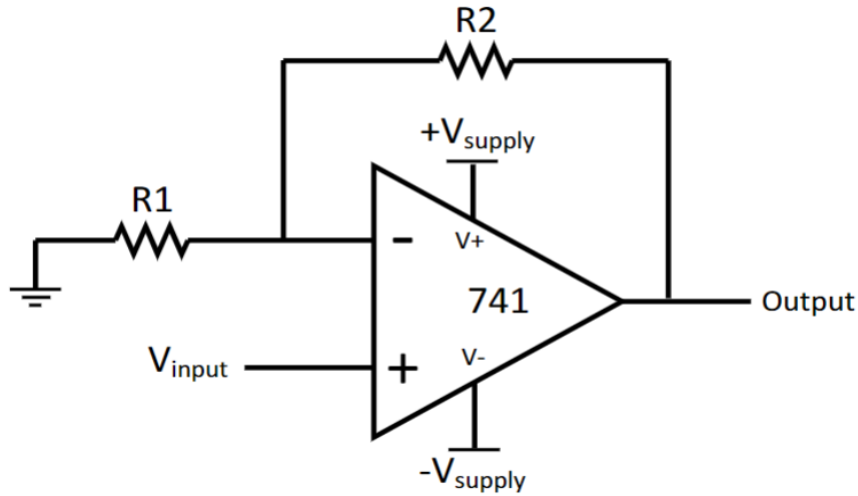

Functional Block Diagram

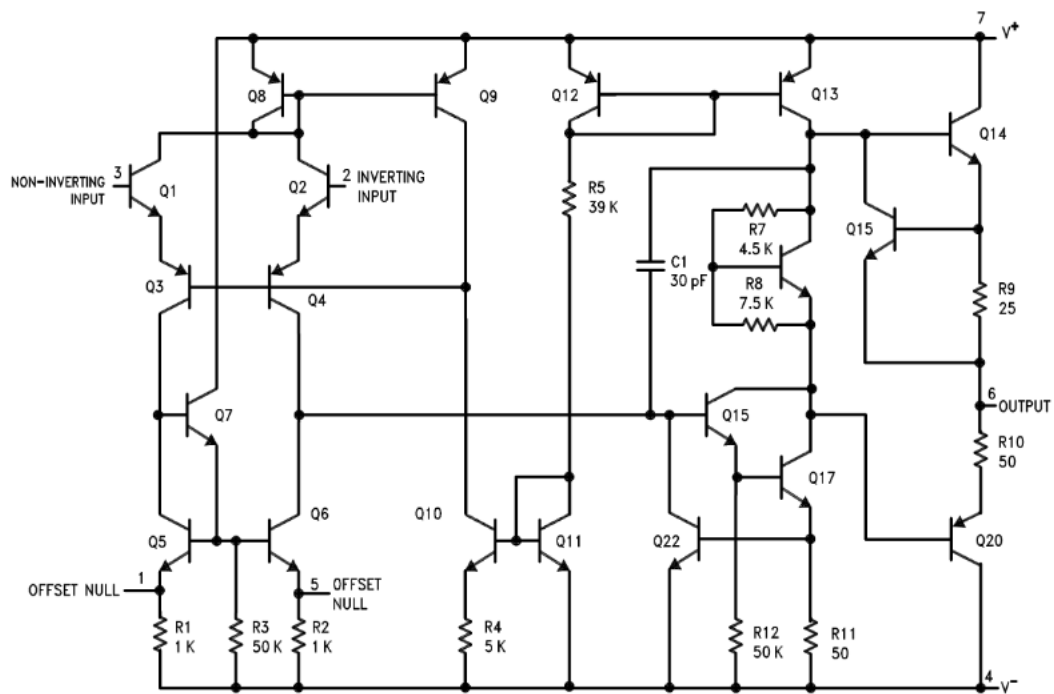

**ELECTRICAL CHARACTERISTICS**

 Electrical characteristics at  $V_{cc} = \pm 15\text{ V}$ ,  $T_{amb} = 25^\circ\text{C}$  (unless otherwise specified)

| Parameter, unit   | Symbol                            | $T_{min} \leq T_{amb} \leq T_{max}$<br>( $0^\circ\text{C}$ )      ( $70^\circ\text{C}$ ) |            | $T_{amb} = (25 \pm 5)^\circ\text{C}$ |            |
|---|-----------------------------------|--|------------|--------------------------------------|------------|
|   |                                   | min  | max        | min                                  | max        |
| 1. Input offset voltage, mV   | $U_{IO}$                          | -6,0   | 6,0        | -5,0                                 | 5,0        |
| 2. Input current, nA  | $I_I$                             | -200,0   | 200        | -100,0                               | 100,0      |
| 3. Input offset current, nA   | $I_{IO}$                          | -70,0  | 70,00      | -30,0                                | 30,0       |
| 4. Large signal voltage gain, V/mV<br>( $R_L = 2\text{ k}\Omega$ )  | $A_u$                             | 25   | -          | 50                                   | -          |
| 5. Supply voltage rejection ratio, dB   | $K_{SVR}$                         | 77   | -          | 77                                   | -          |
| 6. Supply current, no load, mA  | $I_{CC}$<br>( $I_{CC1} I_{CC2}$ ) | -  | 3,3        | -                                    | 2,8        |
| 7. Input common mode voltage range, V   | $U_{IC\ max}$                     | 12   | -12        | 12                                   | -12        |
| 8. Common mode rejection ratio, dB  | $K_{CMR}$                         | 70   | -          | 70                                   | -          |
| 9. Output voltage swing, V<br>$R_L = 10\text{ k}\Omega$<br>$R_L = 2\text{ k}\Omega$   | $U_o\ max$                        | 12<br>10   | -12<br>-10 | 12<br>10                             | -12<br>-10 |
| 10. Output short-circuit current, mA  | $I_{OS}^{1)}$                     | -  | -          | 10                                   | -          |
| 11. Slew rate, V/ $\mu\text{s}$<br>$R_L = 2\text{ k}\Omega$ , $C_L = 100\text{ pF}$ , $U_I \pm 10\text{ V}$                       | $S_{VOM}^{1)}$                    | -  | -          | 0,25                                 | -          |
| 12. Gain bandwidth product, MHz<br>$U_I = 10\text{ mV}$ , $R_L = 2\text{ k}\Omega$ , $C_L = 100\text{ pF}$ , $f = 100\text{ kHz}$ | $f_1^{1)}$                        | -  | -          | 0,7                                  | -          |
| 13. Input resistance, $M\Omega$   | $R_I^{1)}$                        | -  | -          | 0,3                                  | -          |

<sup>1)</sup> Parameter is guaranteed

**MAXIMUM AND ABSOLUTE MAXIMUM RATINGS**


| Parameter, unit                    | Symbol    | Maximum ratings |          | Absolute maximum ratings |          |
|------------------------------------|-----------|-----------------|----------|--------------------------|----------|
|                                    |           | min             | max      | min                      | max      |
| Supply voltage, V                  | $U_{cc}$  | $\pm 5$         | $\pm 18$ | $\pm 4.5$                | $\pm 20$ |
| Common mode input voltage range, V | $U_{ICM}$ | -               | $\pm 12$ | -                        | $\pm 15$ |

Mechanical Dimensions

Package

Dimensions in millimeters

8-DIP

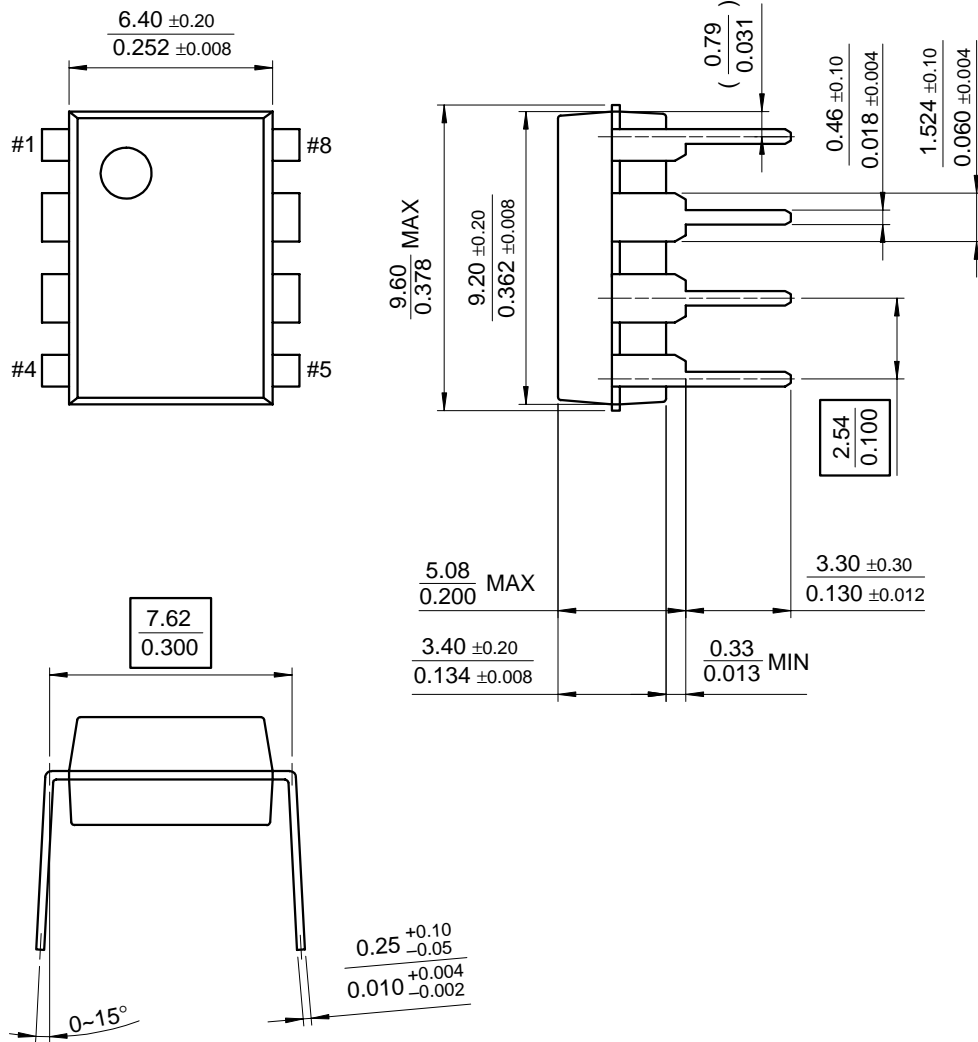


**Mechanical Dimensions** (Continued)

Package

Dimensions in millimeters

**8-SOP**

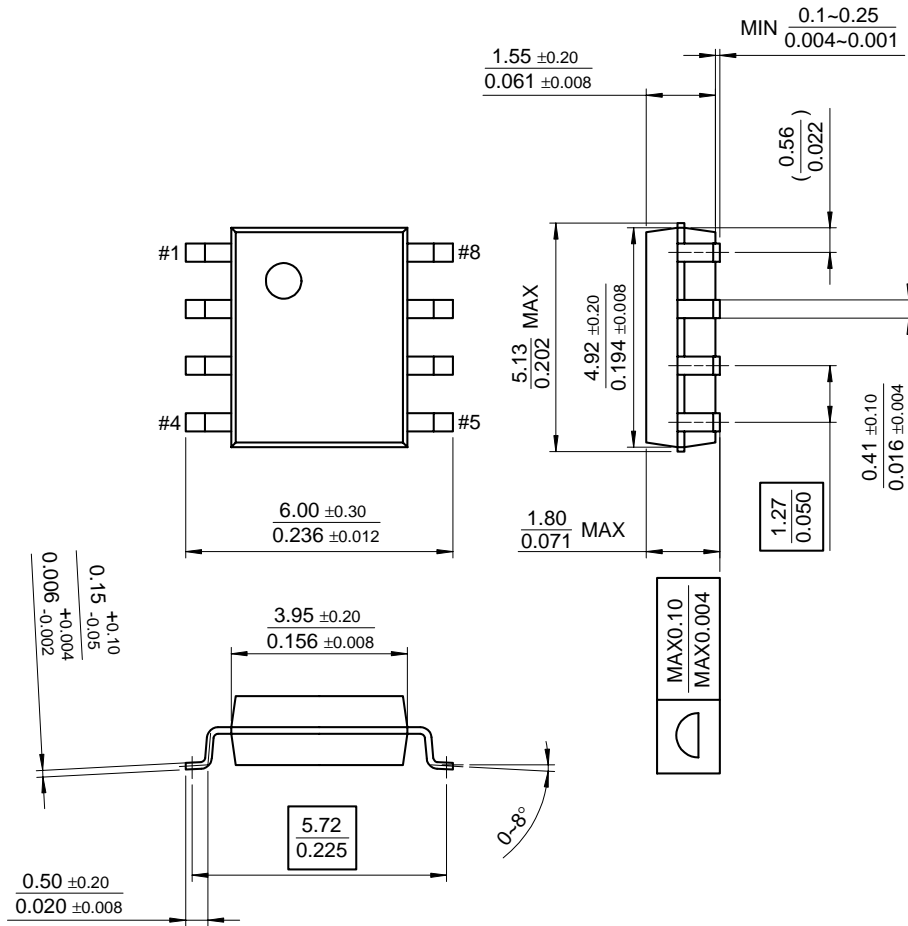

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Operational Amplifiers - Op Amps](#) category:*

*Click to view products by [HTCSEMI](#) manufacturer:*

Other Similar products are found below :

[SC2902DTBR2G](#) [LM358SNG](#) [430227FB](#) [UPC451G2-A](#) [UPC824G2-A](#) [LT1678IS8](#) [042225DB](#) [058184EB](#) [UPC822G2-A](#) [UPC258G2-A](#)  
[NCS5651MNTXG](#) [NCV33202DMR2G](#) [NJM324E](#) [NTE925](#) [5962-9080901MCA\\*](#) [AZV358MTR-G1](#) [AP4310AUMTR-AG1](#)  
[HA1630D02MMEL-E](#) [HA1630S01LPEL-E](#) [AZV358MMTR-G1](#) [SCY33178DR2G](#) [NJU77806F3-TE1](#) [NCV5652MUTWG](#) [NCV20034DR2G](#)  
[NTE778S](#) [NTE871](#) [NTE924](#) [NTE937](#) [MCP6V16UT-E/OT](#) [MCP6V17T-E/MS](#) [MCP6V19T-E/ST](#) [SCY6358ADR2G](#) [NCS20282FCTTAG](#)  
[LM4565FVT-GE2](#) [EL5420CRZ-T7A](#) [TSV772IQ2T](#) [TSV792IYST](#) [NJM2100M-TE1](#) [COS2262MR](#) [COS2252MR](#) [COS5532SRB](#)  
[COS2272MR](#) [LMV358MR](#) [COS6002MR](#) [LMV358SR](#) [LM358SR](#) [RC4580MM/TR](#) [HGV8544M/TR](#) [HGV8541M/TR](#) [HGV8634M/TR](#)