

1



2

3

4

A

A

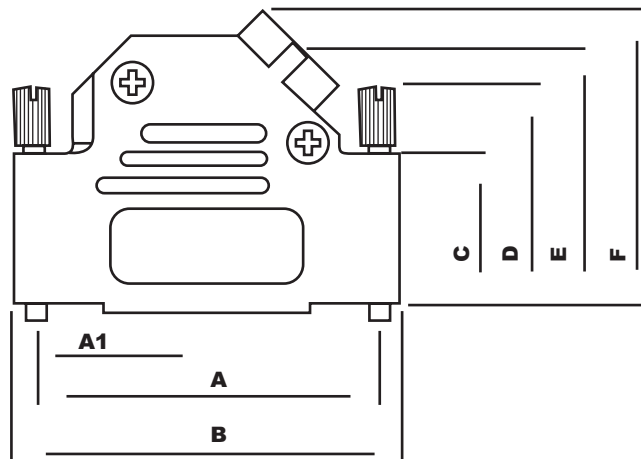

**Features:**

**Material and Finish:**

**Zinc-Die-Cast, Nickel Plated**

**Temperature Range:**

-40°C to +120°C

**Cable Diameter:**

4.0-13.0mm

**Attenuation Factor:**

>40 DB Between 30Mhz and 1 Ghz

**Requirements:**

VDE 0871 FCC 20/80/89/336/EU

**No. of Contacts:**

09, 15, 25, 37

**Black Anodized Version on Request**

**09-poles only with one knurled screw available**

B

B

Dimensions

No. of Contacts	A1	A	B	C	D	E
09	12.7	----	31	19.3	29.8	31.2
15	----	33.3	39.5	20.7	29.8	35.2
25	----	47	53.2	20.8	29.8	35.2
37	----	63.5	69.7	20.8	29.8	35.2

C

C



D

D

Description	
Name :	
AMET-X-RS-45	
Hoods for D-Sub-Connectors	
<b>ASSMANN</b> Electronic Components	

THIS DRAWING IS UNPUBLISHED
© Copyright 2005 by Assmann Electronic Components All International Rights Reserved
This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

1

2

3

4

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [D-Sub Tools & Hardware](#) category:*

*Click to view products by [Assmann](#) manufacturer:*

Other Similar products are found below :

[173112-0667](#) [173112-0759](#) [173112-0967](#) [173112-0291](#) [173112-0456](#) [000-01-09-132](#) [000-01-21-132](#) [000-01-31-162](#) [572019-00105-70](#)  
[000-01-37-162](#) [621-250-113-115](#) [D20418-2R](#) [D20418-J3F](#) [70521CLF](#) [70524BLF](#) [70527BLF](#) [70527CLF](#) [F1042-1PLAH](#) [750643-1](#) [780-010-06G4-00C](#) [780-518-50SG6-WS](#) [863004ATLF](#) [86552009](#) [86553115TLF](#) [86553117TLF](#) [86553156LF](#) [FSGK1/5](#) [980-8554-000](#) [980-8555-000](#)  
[980-8557-000](#) [980-8558-000](#) [1230032-1](#) [1-5021101-2](#) [15-000050](#) [1589283-4](#) [160-000-005R031](#) [16-000230](#) [160-020-109R000](#) [160-025-004R031](#) [160-015-003R031](#) [160-020-209R000](#) [160X10909X](#) [164C03939A](#) [177-505-A-2-2](#) [177-505-C-4-4](#) [179-013-1H](#) [1-966830-8](#) [21018-621028-3](#) [213622-5](#)