

## SMT Half Pitch DIP Switch–Auto Placeable

### Features

#### Optimized Mechanical Features


- Gull-wing and "J" bend terminal configurations
- Low profile actuators prevent accidental actuation
- SPST configuration available

#### Optimized Contact System

- Redundant, wiping contact
- Contactor does not deflect during actuation
- 0.6 mm/.024" actuator travel

#### Materials

- Gold plated beryllium copper contacts
- Gold flash coated terminals
- High temperature materials (UL94V-0)
- RoHS Compliant
- Optional top tape seal for board spray washing

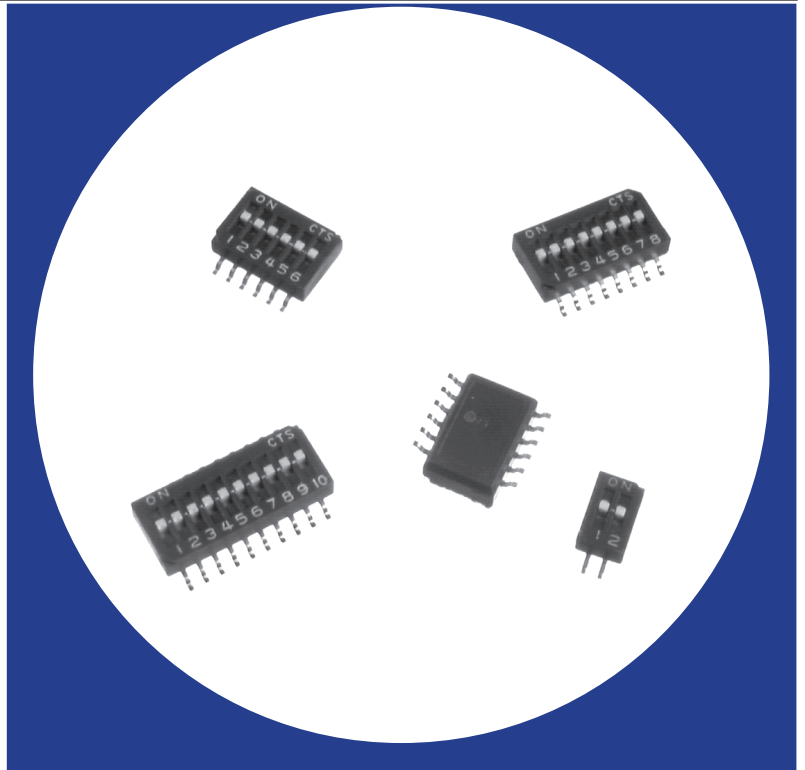

## Electrical and Mechanical Specifications

#### Switch Function

SPST - 2, 4, 6, 8, 10, and 12 positions

#### Switch Contact Resistance

100 milliohms maximum initial

100 milliohms maximum at end of life

#### Insulation Resistance

100 megohms minimum between insulated terminals

#### Dielectric Strength

350 VAC for 1 minute between adjacent switches

#### Nonswitching Rating

100 mA or 50 VDC maximum

#### Switch Capacitance

10 pF maximum between adjacent closed switches

#### Operating Temperature

- 55°C to +85°C

#### Actuation Life

1,000 cycles switching 25 mA @ 24 VDC

#### Coplanarity

Coplanarity of 0.1mm/.004" maximum

#### Allowable Solder Time

Up to 60 seconds at 260°C

#### Vibration

Per MIL-STD-202G, method 204D, condition B (.06" or 15G's between 10 HZ to 2 KHz) with no contact inconsistencies greater than 1 microsecond.

#### Shock

Per MIL-STD-202G, method 213B, condition A (50G's) with no contact inconsistencies greater than 1 microsecond.

#### Sealing

Standard bottom seal

Optional top tape seal for board spray washing

#### Marking


Special marking available-consult CTS

#### Packaging

Standard : Anti-static tube packaging

Optional : Tape and reel packaging

## CTS SERIES 218LPJ - "J" Bend Terminal

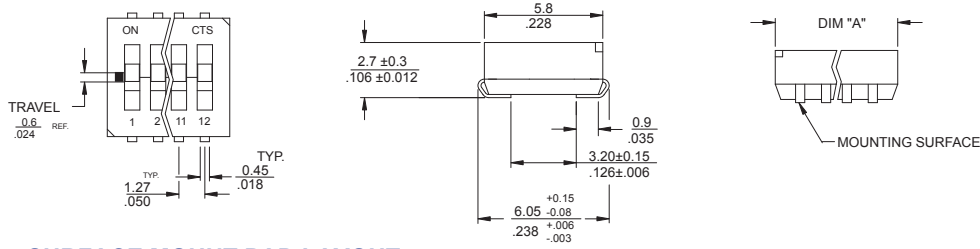

### SURFACE MOUNT PAD LAYOUT





TABLE 1

| NO. OF SWITCH POSITIONS | "A" OVERALL DIMENSIONS |
|-------------------------|------------------------|
| 2                       | 3.71/.146              |
| 4                       | 6.25/.246              |
| 6                       | 8.79/.346              |
| 8                       | 11.33/.446             |
| 10                      | 13.87/.546             |
| 12                      | 16.41/.646             |

## CTS SERIES 218LP - Gull Wing Terminal

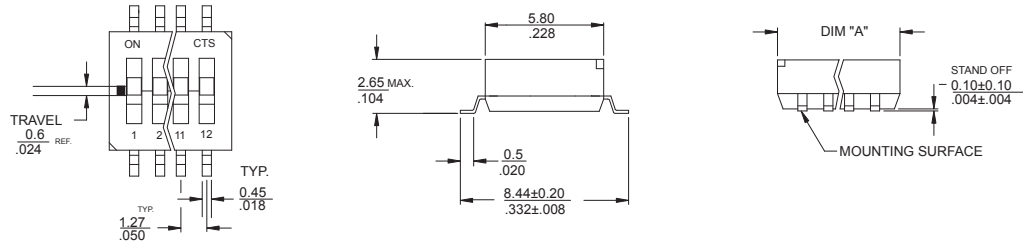

### SURFACE MOUNT PAD LAYOUT





TABLE 2

| NO. OF SWITCH POSITIONS | "A" OVERALL DIMENSIONS |
|-------------------------|------------------------|
| 2                       | 3.71/.146              |
| 4                       | 6.25/.246              |
| 6                       | 8.79/.346              |
| 8                       | 11.33/.446             |
| 10                      | 13.87/.546             |
| 12                      | 16.41/.646             |

DIMENSION:  $\frac{\text{mm}}{\text{inch}}$

## Ordering Information

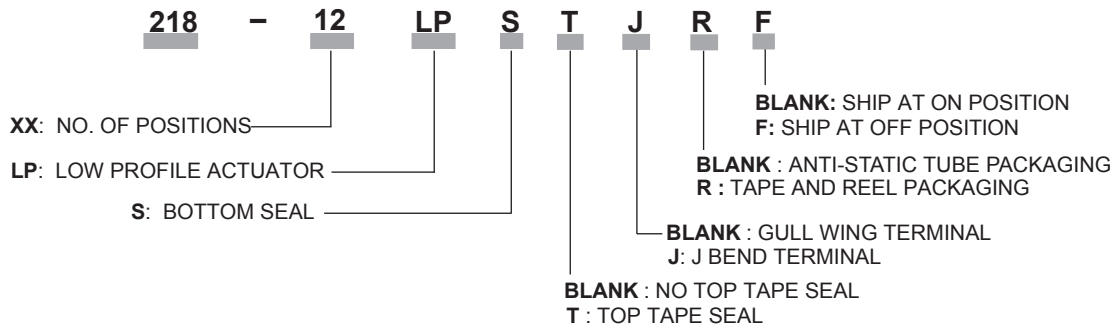

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIP Switches/SIP Switches](#) category:*

*Click to view products by [CTS](#) manufacturer:*

Other Similar products are found below :

[78M03S](#) [79B10T](#) [8136-475G4T](#) [G7G-1A2-CB-DC12](#) [A7SS-M](#) [DBP 2110](#) [DBP 2112](#) [DBS1008](#) [DHN02FTVTR](#) [DHN10T](#) [DHS108](#)  
[DPL08TN](#) [DRD16CSE04](#) [DRR4010](#) [DRR60016](#) [DRS4016](#) [BD06E](#) [1825008-1](#) [1825444-1](#) [25.350.0653.0](#) [LA2-DC12](#) [SBS 5004 TG](#)  
[SDA10H1BDA](#) [97R06ST](#) [A2C-2A5](#) [1825444-7](#) [ADE08SA04](#) [ADE12S04](#) [2161391-1](#) [2-1825058-8](#) [CCVA 2.5/ 4-G-5.08](#) [P26THRR32](#)  
[25.330.0653.1](#) [25.352.0353.0](#) [MDG305ST](#) [IKN0600000](#) [IKN0800000](#) [LA2-002-DC24](#) [DBP2008](#) [DBS1003](#) [DBS2008](#) [438872000](#)  
[DRD10CRAE04](#) [DRS1604](#) [DSR02T](#) [DSS 208 N](#) [5-1825033-1](#) [106-SDN06-EV](#) [1-1437507-6](#) [E2FMX2D1M1TGJ03M](#)  
[E3ZMCT81M1TJ03M](#)