

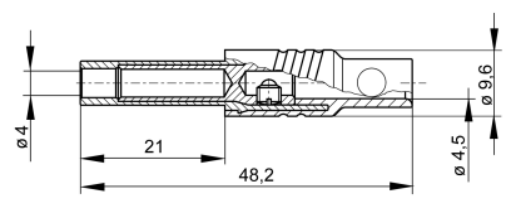


datasheet for KUN S
 article number: 934096104



product description:	order number: 934 096-104
description:	Safety coupling with screw connection for leads from 0.5mm ² to 1.5mm ² outer diameter of lead max. 4,2mm plug with 4mm plugs and 4mm safety plugs 1000V-system, IEC 61010 simple assembly by "Click" system
typ:	KUN S gruen/green
system:	4mm safety system
order number:	934 096-104
color	
other color versions:	
technical data	
measurement category acc. to IEC 61010:	CAT III
type of contact:	4 mm socket (unsprung)
type of termination:	screw
rated voltage:	AC/DC 1000 V
rated current: Please consider derating curve!	24 A
contact resistance:	10 mOhm
material	
contact material:	brass
contact surface material:	nickel
housing material:	PA
environmental conditions:	
temperature range:	-15 °C to +70 °C
inflammable class:	
housing (basic material):	UL 94 V - 2
drawing	
	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Plugs & Test Jacks](#) category:

Click to view products by [Hirschmann](#) manufacturer:

Other Similar products are found below :

[579-0400](#) [66000-7](#) [R644543000](#) [R921923000](#) [R921930000](#) [R941344000](#) [R948161000](#) [R999351000](#) [1408-4](#) [1533-1](#) [174-R825B-EX](#)
[NYS508-BU](#) [1680](#) [174-R819B-EX](#) [R644543003](#) [R644543004](#) [R644543020](#) [R644543021](#) [R921926000](#) [R921931000](#) [R921932000](#)
[R921934000](#) [R929991000](#) [R941460000](#) [R941461000](#) [R941463600](#) [R941920600](#) [R948160000](#) [31B-2-RED](#) [032-0016-023](#) [105-1106-001](#)
[108-1000-106](#) [108-2301-621](#) [66001-9](#) [7013](#) [1395080-1](#) [930166100](#) [NYS508-W](#) [NYS508-Y](#) [NYS511-R](#) [BP30-2BR10-B PKG](#) [BP30-10-WT](#)
[BP30-2BR-B PKG](#) [BP30Y-1 PKG](#) [R941049000](#) [R941340000](#) [R948141029](#) [R921922000](#) [R644543022](#) [R948142000](#)