





**RoHS - compliant**

### DIMENSIONS

#### Package:

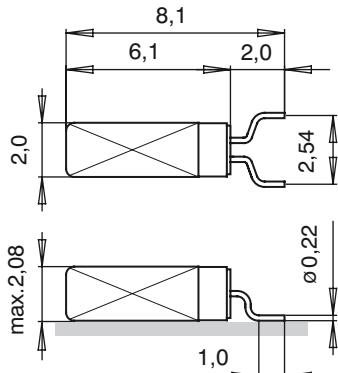

#### Recommended Solder Pad:

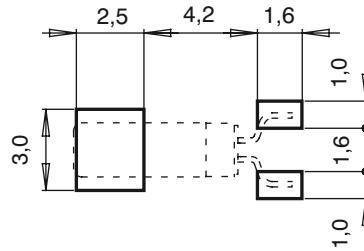

All dimensions in mm typical

**Small SMT package**  
**Package height 2.08 mm max.**  
**Formed leads for SMD mounting**  
**Industrial temp. range**  
**Very price competitive**  
**High stability**  
**Low aging**  
**Low power consumption**  
**High shock and vibration resistance**

### DESCRIPTION:

The MS1V-T1K is a square-bodied 2 x 2 x 6 mm metal-can package with formed leads, intended for surface mounting and reflow soldering. Within the package is a high-quality tuning fork quartz crystal resonator, manufactured with a precision high-volume photolithographic process and operating in the fundamental mode.

Due to highly automated, large-volume production, the MS1V-T1K is very price competitive and ideal for any consumer and industrial applications.

For pick-and-place equipment, the crystals are supplied in 16 mm tape: 13" (330 mm) reel with 8'000 crystals

### ELECTRICAL CHARACTERISTICS AT 25°C:

Frequency Range	F <sub>L</sub>	30–200		kHz
Load capacitance <sup>1)</sup>	C <sub>L</sub>	12.5		pF
Frequency tolerance <sup>2)</sup>	ΔF/F	+/-20		ppm
	ΔF/F	+/-30		ppm
	ΔF/F	+/-100		ppm
Drive level max.	P	1.0		μW
Insulation resistance min.	R <sub>i</sub>	500		MΩ
Aging first year max.	ΔF/F	+/-3		ppm

Frequency Example <sup>3)</sup>	F <sub>L</sub>	32.000	32.768	76.800	kHz
Series resistance typ./max.	R <sub>S</sub>	45 / 60	45 / 60	18 / 30	kΩ
Motional capacitance typ.	C <sub>1</sub>	2.3	2.1	1.35	fF
Static capacitance typ.	C <sub>0</sub>	0.9	0.9	0.9	pF
Turnover temperature	T <sub>0</sub>	25 +/-5	25 +/-5	22 +/-5	°C
Frequency vs. temperature	ΔF/F <sub>0</sub>	-0.035 ppm/°C <sub>2</sub> (T - T <sub>0</sub> ) <sup>2</sup> +/-10%			ppm

1) For standard and other load capacitances consult factory.

2) Tighter and wider frequency tolerances on request.

3) Values for other frequencies consult factory.

**STANDARD FREQUENCIES:**

Frequency kHz				
32.000	32.768	38.400	40.000	60.000
75.000	76.800	77.500		
Other frequencies on request				


**ENVIRONMENTAL  
CHARACTERISTICS:**

		Conditions	Max. Dev.
Storage temp. range		-55 to +85°C	
Operating temp. range		-40 to +85°C	
Shock resistance	ΔF/F	5000 g, 0.3 ms, ½ sine	+/- 5 ppm
Vibration resistance	ΔF/F	20 g / 10–2000 Hz	+/- 5 ppm

**TERMINATIONS AND  
PROCESSING:**

Type	Termination	Processing
MS1V-T1K	Can: Au flashed Leads: Formed leads Au flashed	For SMD mounting Reflow soldering 260°C / 20 sec. max

**PART NUMBER/  
ORDERING INFORMATION  
EXAMPLE:**

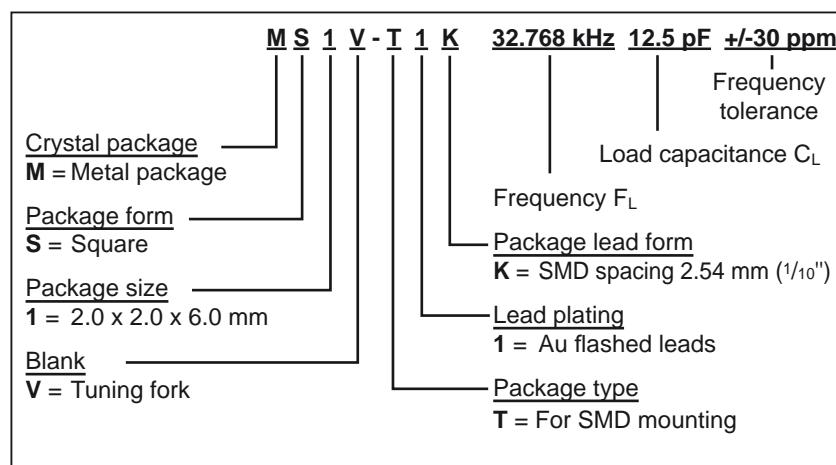

All specifications subject to change without notice. 03.07



A COMPANY OF THE SWATCH GROUP

Micro Crystal  
Div. of ETA SA  
Mühlestrasse 14  
CH-2540 Grenchen  
Switzerland

Tel. +41 32 655 82 82  
Fax +41 32 655 82 83  
sales@microcrystal.ch  
www.microcrystal.com

Version 4.0/03.2007

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for micro crystal manufacturer:***

Other Similar products are found below :

[RV-8523-C3-EVALUATION-BOARD](#) [RV-3028-C7 ON BOARD 32.768kHz TA QC](#) [RV-3049-C2-EVALUATION-BOARD-OPTION-B](#) [RV-3029-C2-EVALUATION-BOARD-OPTION-B](#) [RV-8803-C7-EVALUATION-BOARD](#) [OV-7604-C7-EVALUATION-BOARD](#) [RV-8263-C7-EVALUATION-BOARD](#) [CM7V-T1A-32.768kHz-9pF-20PPM-TC-QC](#) [RV-2251-C3-EVALUATION-BOARD](#) [RV-3029-C3-32.768k-OPTION-B-TB-QA](#) [RV-3029-C3-TB-QA-OPT.B](#) [CC4V-T1A-32.768kHz-9pF-20PPM-TA-QC](#) [RV-2123-C2-TA-QC-020](#) [CC4V-T1A 32.768KHZ +-20PPM 9PF](#) [MS1V-T1K-32.768kHz-7pF-20PPM-TA-QC-Au](#) [CC7V-T1A-32.768k-12.5pF-20PPM-TA-QA](#) [CC4V-T1A 32.768KHZ 12.5PF +-20PPM](#) [CM7V-T1A-32.768k-6pF-20PPM-TB-QA](#) [RV-3029-C2-TB-QA-OPT.A](#) [OM-0100-C8-100.00kHz-20PPM-TA-QC](#) [CM7V-T1A-32.768k-9pF-20PPM-TA-QA](#) [RV-8803-C7-32.768k-3PPM-TA-QA](#) [CM8V-T1A-32.768kHz-7pF-20PPM-TB-QC](#) [RV-3049-C3-TB-QA-OPT.A](#) [CC5V-T1A 32.768KHZ +-20PPM 9PF](#) [RV-8564-C3-TA-QC-020](#) [MS1V-T1K 32.768KHZ +-20PPM 10PF](#) [CM7V-T1A-32.768kHz-12.5pF-100PPM-TC-QC](#) [RV-3029-C3-32.768k-OPTION-A-TB-QA](#) [CC7V-T1A-32.768k-9pF-20PPM-TC-QA](#) [CM7V-T1A-32.768k-9pF-20PPM-TC-QA](#) [CC7V-T1A-32.768kHz-7pF-20PPM-TB-QC](#) [CM7V-T1A-100.000kHz-9pF-100PPM-TA-QC](#) [RV-4162-C7-TA-QC-020](#) [CC7V-T1A-32.768k-9pF-20PPM-TA-QA](#) [RV-3029-C2-32.768k-OPTION-A-TB-QA](#) [RV-3049-C3-32.768kHz-OPTION-B-TA-QC](#) [RV-8564-C2-32.768kHz-20PPM-TA-QC](#) [CC7V-T1A-32.768kHz-7pF-10PPM-TA-QC](#) [CM7V-T1A-32.768k-9pF-20PPM-TB-QA](#) [OM-7605-C8-20PPM-TA-QA](#) [CC7V-T1A-32.768k-12.5pF-20PPM-TB-QA](#) [CC7V-T1A-32.768kHz-12.5pF-10PPM-TA-QC](#) [OV-7604-C7](#) [RV-3149-C3-32.768kHz OPTION B TA QC](#) [RV-3049-C3-32.768k-OPTION-B-TB-QA](#) [CC4V-T1A-32.768kHz-7pF-20PPM-TA-QC](#) [CM9V-T1A-32.768kHz-7pF-100PPM-TA-QC](#) [CM7V-T1A-32.768k-7pF-100PPM-TB-QA](#) [CM7V-T1A-0.3-32.768kHz-9pF-20PPM-TA-QC](#)