

06.63.206



Detailed View



06.63.206 **Locking Support, Threaded Female**

Length	20,0 mm
Material	Nylon 66
Thread Typ	M3
Dia. Hole Board	4,0 mm
Dia. Hole Chassis	3,2 mm
Typ	Support Threaded Male
UL-Flamability	UL94 HB
Board Thickness	2,10 mm
Model	Support Treaded Female
Colour	black
Design	Screw Mounting
	RoHS konform / WEEE konform / 76/769/EWG konform / PAKs frei

Locking Su

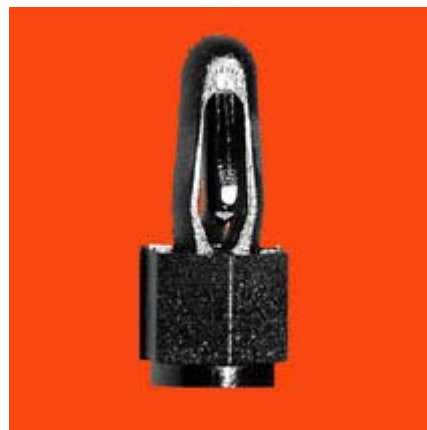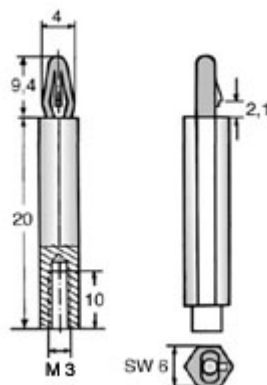

Length
Material
Thread Typ

20,0 mm
Nylon 66
M3

Dia. Hole Board	4,0 mm
Dia. Hole Chassis	3,2 mm
Typ	Support Thread
UL-Flamability	UL94 HB
Board Thickness	2,10 mm
Model	Support Tread
Colour	black
Design	Screw Mounting

Specifications

[Details...](#)

Deliverydate	from stock
Price Grading	100 to 499 pieces
	500 to 999 pieces
	1000 to 2499 pieces
	more than 2500 pieces

To order



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ettinger](#) manufacturer:

Other Similar products are found below :

[055 0044 000 03](#) [14.86.353](#) [72.79.105](#) [03.16.040](#) [05.25.301](#) [02.09.218](#) [05.42.045](#) [05.60.233](#) [06.21.404](#) [06.81.146](#) [07.63.069](#) [05.03.301](#)
[06.21.412](#) [05.07.103](#) [05.54.103](#) [02.17.159](#) [19.68.231](#) [03.04.043](#) [06.21.406](#) [5.30.325](#) [5.30.610](#) [06.81.156](#) [5.30.430](#) [05.28.315](#) [81.55.331](#)
[81.55.311](#) [05.03.181](#) [71.34.466](#) [06.53.186](#) [05.54.153](#) [06.84.356](#) [5.30.625](#) [05.65.081](#) [05.53.013](#) [05.13.451](#) [70.83.234](#) [05.03.331](#) [06.63.126](#)
[14.42.907](#) [05.60.344](#) [06.53.106](#) [06.21.812](#) [05.04.171](#) [05.54.053](#) [81.57.433](#) [05.17.254](#) [05.60.125](#) [06.53.206](#) [5.30.415](#) [72.79.101](#)