


I02 Series High Current Power Inductor

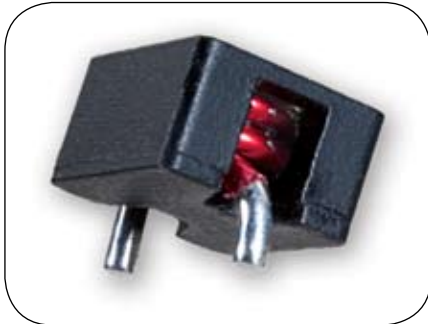

Features


- High Saturation Current to 60A
- DCR as low as 0.60mΩ
- High Energy Storage in a Compact Package
- Lower DCR than similar Toroid Design

Applications


- Desktop CPUs
- Servers
- VRMs
- DC/DC Converters

Packaging Tray =130 pieces, Box = 16 trays, Box = 2080 pieces

Mechanical




Top View




Side View

Suggested PCB layout



Top View

Schematic



unit: mm

Electrical Specifications

Part Number	Inductance ¹ (uH,+/-10%)	DCR (mΩ)		I _{sat} ⁵ (A)	I _{dc} ⁶ (A)	Dimensions		
		Typ.	Max.			X	Y	Z
I02-221-1	0.22	0.45	0.60	60+	45	12.5	16.0	2.2
I02-351-1	0.35	0.45	0.60	55	45	12.5	16.0	2.2
I02-451-1	0.45	1.10	1.45	50	29	12.7	15.7	1.6
I02-601-1	0.60	1.10	1.45	45	29	12.7	15.7	1.6
I02-801-1	0.80	2.10	2.40	44	23	10.0	13.0	1.3
I02-102-1	1.0	2.10	2.40	35	23	10.0	13.0	1.3
I02-132-1	1.3	2.55	3.00	34	19	11.0	14.0	1.3
I02-152-1	1.5	2.55	3.00	25	19	11.0	14.0	1.3
I02-182-1	1.8	2.55	3.00	20	19	11.0	14.0	1.3

1. Tested at 100 kHz, 0.1Vrms, 0 Adc bias.
2. Electrical specifications at 25°C.
3. Operating range: -40°C to +125°C.
4. Meets UL 94V-0.
5. Idc is DC current required to produce a temperature rise of 40°C.
6. Isat is the DC current required to reduce the nominal inductance by 15%.
7. RoHS compliant parts.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [ICE](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#)
[MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#)
[PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#)
[RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#)
[DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#)
[1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)