

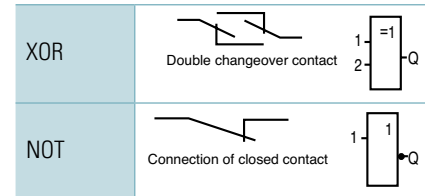
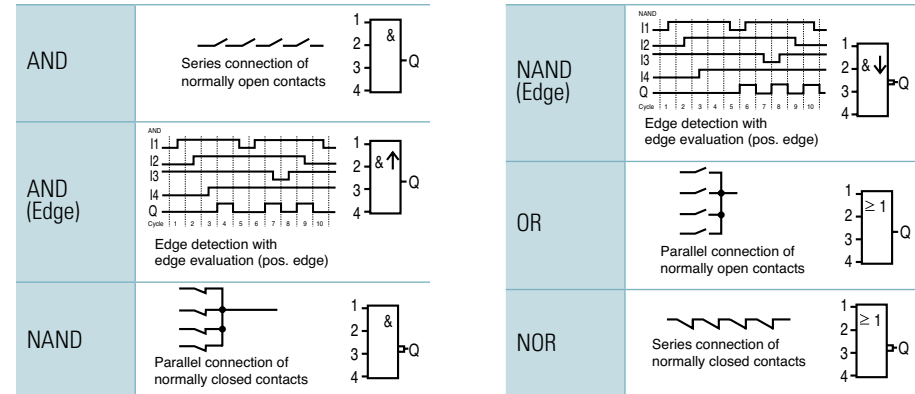
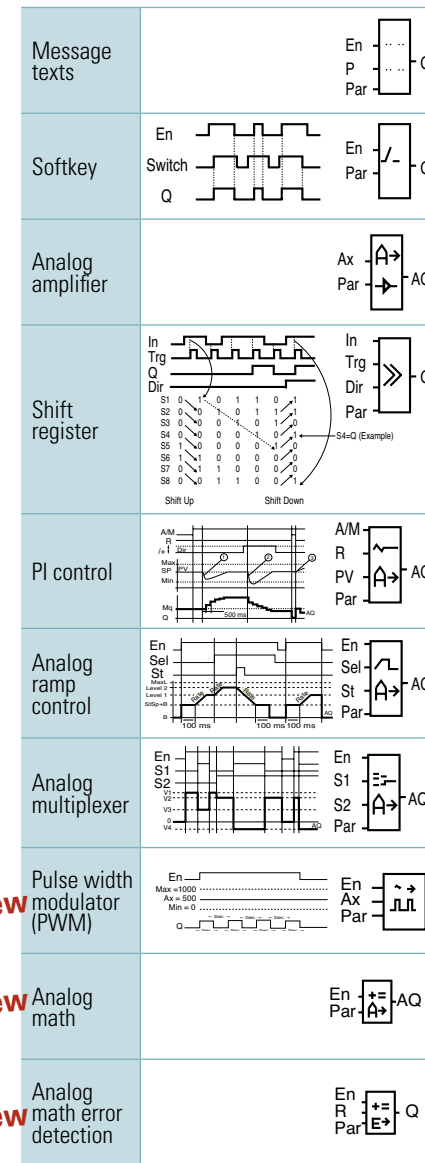


Function Blocks

General

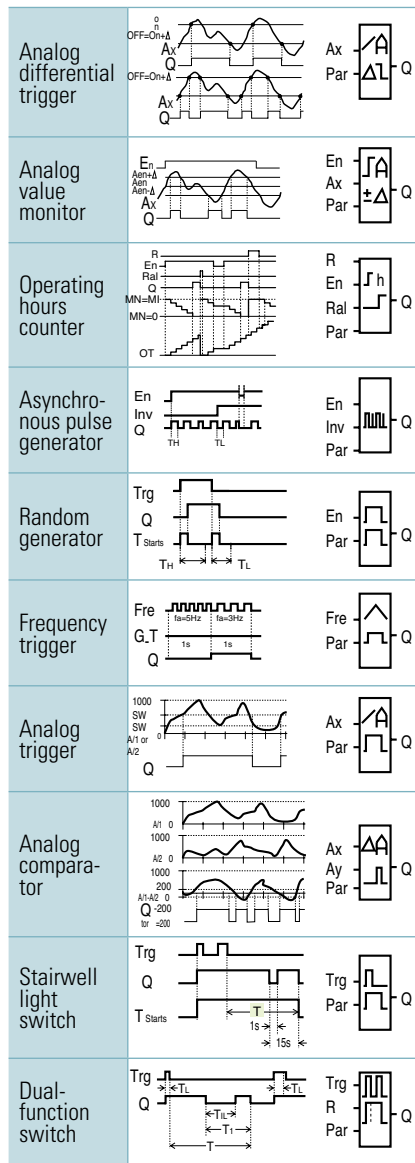


Special

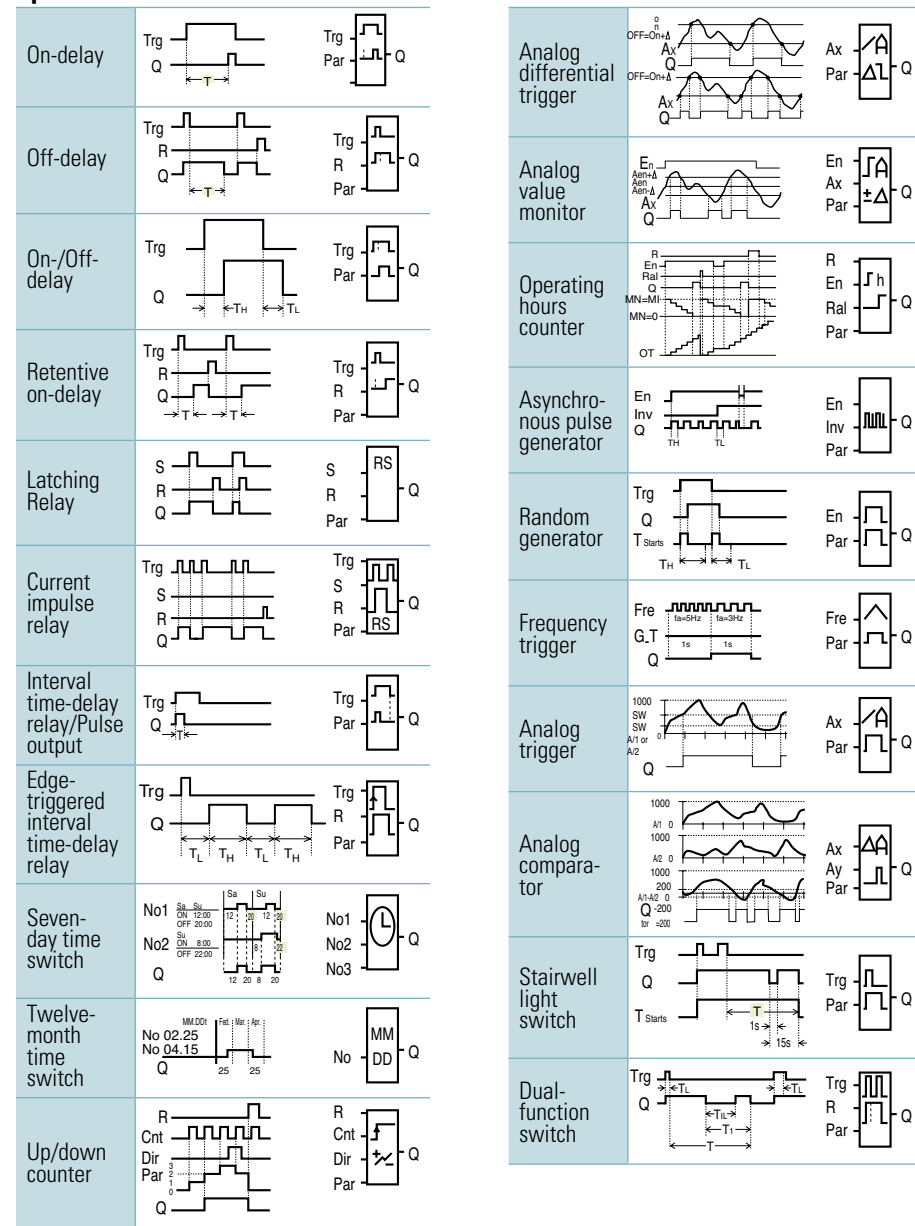

FL1E IDEC SmartRelay

Features

- **New** Remote text display panel
- **New** Extended retentive data memory
- **New** Arithmetic functions
- **New** Controllable backlit LCD display
- **New** 4 built-in 5kHz fast inputs
- **New** 4 built-in analog inputs
- **New** 3 memory cartridges
- **New** USB programming cable
- **New** Brighter & higher LCD contrast
- **New** 50% more memory
- EEPROM memory
- Password protection
- Universal voltages
- DIN rail or surface mountable
- Max. 50 message blocks



Specifications

Base Modules

Base Module Part Number	with LCD Display	FL1E-H12SND	FL1E-H12RCE	FL1E-H12RCA	FL1E-H12RCC	
	without Display	FL1E-B12RCE	FL1E-B12RCA	FL1E-B12RCC		
Power Supply	Rated Power Voltage	24V DC	12/24V DC	24V AC/DC	100 to 240V AC/DC	
	Allowable Voltage Range	20.4 to 28.8V DC	10.8 to 28.8V DC	20.4 to 26.4V AC, 20.4 to 28.8V DC	85 to 265V AC, 100 to 253V DC	
	Rated Frequency	—	—	47 to 63Hz	47 to 63Hz	
	Current Draw	40 to 75mA (24V DC)	60 to 175mA (12V DC) 40 to 100mA (24V DC)	76 to 182mA (24V AC) 40 to 100mA (24V DC)	25 to 40mA (100V AC), 20 to 30mA (240V AC) 10 to 25mA (100V DC), 6 to 15mA (240V DC)	
	Allowable Momentary Power Interruption	—	2ms (Typ.) (12V DC) 5ms (Typ.) (24V DC)	5ms (Typ.) (24V AC/DC)	10ms (Typ.) (100V AC/DC) 20ms (Typ.) (240V AC/DC)	
	Power Consumption	0.7 to 1.3W (24V DC)	0.3 to 1.7W (12V DC) 0.4 to 1.8W (24V DC)	0.9 to 2.7VA (24V AC) 0.4 to 1.8W (24V DC)	1.1 to 4.6VA (100V AC), 2.4 to 6.0VA (240V AC) 0.5 to 2.9W (100V DC), 1.2 to 3.6W (240V DC)	
Clock	Backup Duration	—	80 hours (25°C) ^{Note 1}	80 hours (25°C) ^{Note 1}	80 hours (25°C) ^{Note 1}	
	Clock Accuracy	—	±2 sec/day maximum	±2 sec/day maximum	±2 sec/day maximum	
Input	Input Signal	DC		AC/DC	AC/DC	
	Input Points	8 (I1 to I8)		8 (I1 to I8)	8 (I1 to I8)	
	Analog Input Points	4 (I3, I4, I5, I6)		—	—	
	High-speed Input ^{Note 2}	4 (I3, I4, I5, I6), 5KHz maximum		—	—	
	Analog	Input Range	0 to 10V DC (max. rated input: 28.8V DC)		—	—
		Input Error	±1.5 (of full scale)		—	—
		Input Resolution	10 bits (0 to 1000)		—	—
		Allowable Voltage Range	0 to 28.8V DC		—	—
	Input Impedance	Digital Input	3.5kΩ		4.8kΩ	840kΩ
		Analog Input	72kΩ		—	—
Operating Range	Isolation	—		—	—	
	OFF Voltage	< 5V DC		< 5V AC/DC	< 40V AC, < 30V DC	
	ON Voltage	≥ 12V DC		≥ 12V AC/DC	≥ 79V AC, ≥ 79V DC	
	OFF Current	< 0.85mA (I1 to I6), < 0.05mA (I1, I2, I7, I8)		< 1.0mA	< 0.03mA	
Turn ON Time	ON Current	≥ 2mA (I3 to I6) ≥ 0.15mA (I1, I2, I7, I8)	≥ 1.5mA (I3 to I6) ≥ 0.1mA (I1, I2, I7, I8)	≥ 2.5mA	≥ 0.08mA, 100V AC: 50ms (Typ.)	
	Turn ON Time	1.5ms (Typ.) ≤ 1.0ms (I3, I6)		1.5ms (Typ.)	100V AC: 50ms (Typ.), 240V AC: 30ms (Typ.) 100V DC: 25ms (Typ.) 240V DC: 15ms (Typ.)	
Turn OFF Time	1.5ms (Typ.) ≤ 1.0ms (I3, I6)		15ms (Typ.)	100V AC: 65ms (Typ.), 240V AC: 105ms (Typ.) 100V DC: 95ms (Typ.), 240V DC: 125ms (Typ.)		
Wire Length	100m ^{Note 3}		100m ^{Note 3}	100m		




1. Two year backup duration (typ.) when battery cartridge or memory/battery cartridge used.

2. When selecting frequency trigger function and up/down counter function.
3. 10m when connected to analog input (twisted pair cable).


Specifications con't

Base Module Part Number	with LCD Display	FL1E-H12SND	FL1E-H12RCE	FL1E-H12RCA	FL1E-H12RCC	
	without Display	—	FL1E-B12RCE	FL1E-B12RCA	FL1E-B12RCC	
Output	Output	Transistor source		Relay		
	Output Points/ Contact Configuration	4 points (separate)		4NO contacts		
	Isolation	—		Isolated		
	Dielectric Strength (between power/input terminals and output terminals)	—		2500V AC, 1 minute, 500V DC, 1 minute		
	Output Voltage	External power voltage		—		
	Maximum Load Current	0.3A		Resistive load: 10A at 12/24V AC/DC, 10A at 100/120V AC, 10A at 230/240V AC Inductive load: 2A at 12/24V AC/DC, 3A at 100/120V AC, 3A at 230/240V AC		
	Surge Current	—		30A maximum		
	Short-circuit Protection	Built-in current limiting resistor: Approx. 1A		External fuse required: 16A maximum		
	Minimum Switching Load	—		10mA, 2V DC	10mA, 12V DC	
	Initial Contact Resistance	—		100 mΩ maximum (at 1A, 24V DC)		
	Mechanical Life	—		10 million operations (no load, 10Hz)		
	Electrical Life	—		100,000 operations (rated resistive load) 1800 operations/hour		
Switching Rate	Mechanical Load	—		10Hz		
	Electrical Load	10Hz		—		
	Resistive Load/Lamp Load ¹	10Hz		2Hz		
	Inductive Load	0.5Hz		0.5Hz		

 1. For fluorescent lamps, if the inrush current exceeds the allowable value, use an appropriate relay.


General

Item		Specification	Standard
Operating Temperature	Horizontal Mounting	0 to 55°C	Cold: IEC60068-2-1 Hot: IEC60068-2-2
	Vertical Mounting	0 to 55°C	
Storage/Transportation Temperature		-40 to +70°C (no freezing)	—
Relative Humidity		10 to 95% RH (no condensation)	IEC60068-2-30
Atmospheric Pressure		795 to 1080 hPa	—
Operating Condition		No corrosive gas	—
Degree of Protection		IP20	—
Vibration Resistance		5 to 8.4Hz, amplitude 3.5mm 8.4 to 150Hz, acceleration 9.8m/s ²	IEC60068-2-6
Shock Resistance		147m/s ²	IEC60068-2-27
Drop Test		0.3m	IEC60068-2-31
Drop Test (packaged)		1m	IEC60068-2-32
Emission		Class B Group 1 ^{Note 1}	EN55011
Electrostatic Discharge		8kV air discharge, 6kV contact discharge ^{Note 2}	IEC61000-4-2
Radiation Field Immunity		Field Strength: 1V/m and 10V/m	IEC61000-4-3
Burst Pulses		2kV (power line), 1kV (I/O signal line) ^{Note 3}	IEC61000-4-4
Energy Carriers Single Pulse (Surge) ^{Note 4} (FL1E-H12RCC, FL1E-B12RCC only)		1kV (power line) normal 2kV (power line) common	IEC61000-4-5
Communication Cable		0.5 to 2.5mm ² (one wire), 0.5 to 1.5mm ² (two wires)	—
Terminal Style		Finger-safe type ^{Note 5}	—

-  1. Class A for AS-Interface communication module.
- 2. 8kV (air discharge), 4kV (contact discharge) for AS-Interface communication module.
- 3. 1kV (criteria A), 2kV (criteria B) for AS-Interface communication module.
- 4. For protection against surge noise on DC power supply types (FL1E-H12RCE/B12RCE, FL1E-H12SND, FL1E-H12RCA/B12RCA), use surge absorbers, noise cut transformers, or noise filters. Use of surge protection device (DEHN + SOHNE GmbH + Co. VVT AD 24 Part No. 918 402) is recommended.
- 5. Tightening torque 0.4 to 0.5 N·m.

Text Display


Part Number	FL1E-RD1		
Keyboard Display	Membrane keypad with 10 keys, FSTN-Graphic Display with 128 x 64 (columns x rows), LED backlight		
Power Supply	Input Voltage	24V AC/DC, 12V DC	
	Allowable Voltage Range	20.4 to 26.4V AC, 10.2 to 28.8V DC	
	Rated Frequency	47 to 63Hz	
	Current Draw	30 to 55mA (24V DC)	
	Power Consumption	12V DC	65mA
		24V DC	40mA
24V AC		90mA	
Data Transmission Rate	19200 baud		
LCD Display	Backlight lifetime ^{Note 1}	20,000 hours	
	Display lifetime ^{Note 2}	50,000 hours	
Weight	220g		

 Connect the text display and the base module using the text display cable (2.5m). The text display cable can be extended up to 10m using an extension cable (D-sub 9-pin).
 1. Backlight durability is the number of hours it takes for the light to become 50% of the original brightness.
 2. Display durability is calculated under ordinary operating and storage conditions: room temperature, normal humidity below 65% RH, and not subjected to direct sunlight.




Dimensions (mm)


Base Module

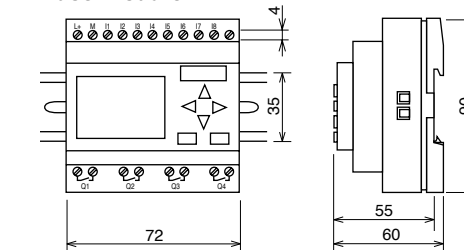


Expansion I/O Module, Communication Module

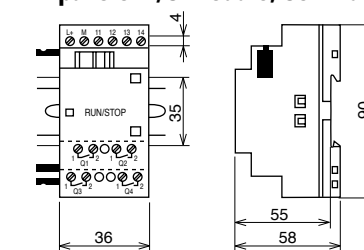


Mounting Hole Layout (Using Mounting Slides)

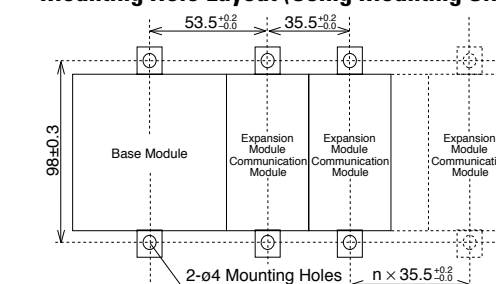


Text Display

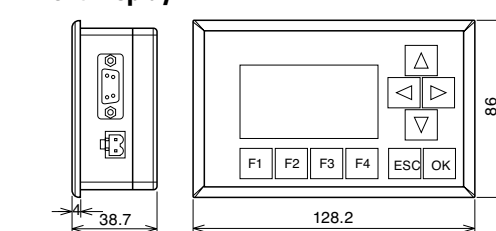

Installation

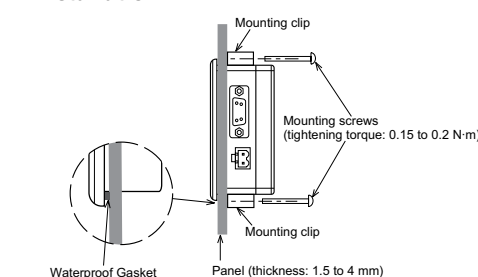


Mounting Hole Layout

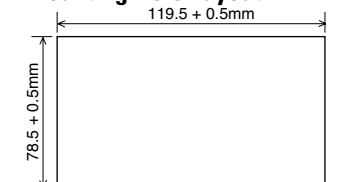


Specifications con't

Base Module Part Number	with LCD Display	FL1E-H12SND	FL1E-H12RCE	FL1E-H12RCA	FL1E-H12RCC	
	without Display	—	FL1E-B12RCE	FL1E-B12RCA	FL1E-B12RCC	
Output	Output	Transistor source		Relay		
	Output Points/ Contact Configuration	4 points (separate)		4NO contacts		
	Isolation	—		Isolated		
	Dielectric Strength (between power/input terminals and output terminals)	—		2500V AC, 1 minute, 500V DC, 1 minute		
	Output Voltage	External power voltage		—		
	Maximum Load Current	0.3A		Resistive load: 10A at 12/24V AC/DC, 10A at 100/120V AC, 10A at 230/240V AC Inductive load: 2A at 12/24V AC/DC, 3A at 100/120V AC, 3A at 230/240V AC		
	Surge Current	—		30A maximum		
	Short-circuit Protection	Built-in current limiting resistor: Approx. 1A		External fuse required: 16A maximum		
	Minimum Switching Load	—		10mA, 2V DC	10mA, 12V DC	
	Initial Contact Resistance	—		100 mΩ maximum (at 1A, 24V DC)		
	Mechanical Life	—		10 million operations (no load, 10Hz)		
	Electrical Life	—		100,000 operations (rated resistive load) 1800 operations/hour		
Switching Rate	Mechanical Load	—		10Hz		
	Electrical Load	10Hz		—		
	Resistive Load/Lamp Load ¹	10Hz		2Hz		
	Inductive Load	0.5Hz		0.5Hz		

 1. For fluorescent lamps, if the inrush current exceeds the allowable value, use an appropriate relay.


General

Item		Specification	Standard
Operating Temperature	Horizontal Mounting	0 to 55°C	Cold: IEC60068-2-1 Hot: IEC60068-2-2
	Vertical Mounting	0 to 55°C	
Storage/Transportation Temperature		-40 to +70°C (no freezing)	—
Relative Humidity		10 to 95% RH (no condensation)	IEC60068-2-30
Atmospheric Pressure		795 to 1080 hPa	—
Operating Condition		No corrosive gas	—
Degree of Protection		IP20	—
Vibration Resistance		5 to 8.4Hz, amplitude 3.5mm 8.4 to 150Hz, acceleration 9.8m/s ²	IEC60068-2-6
Shock Resistance		147m/s ²	IEC60068-2-27
Drop Test		0.3m	IEC60068-2-31
Drop Test (packaged)		1m	IEC60068-2-32
Emission		Class B Group 1 ^{Note 1}	EN55011
Electrostatic Discharge		8kV air discharge, 6kV contact discharge ^{Note 2}	IEC61000-4-2
Radiation Field Immunity		Field Strength: 1V/m and 10V/m	IEC61000-4-3
Burst Pulses		2kV (power line), 1kV (I/O signal line) ^{Note 3}	IEC61000-4-4
Energy Carriers Single Pulse (Surge) ^{Note 4} (FL1E-H12RCC, FL1E-B12RCC only)		1kV (power line) normal 2kV (power line) common	IEC61000-4-5
Communication Cable		0.5 to 2.5mm ² (one wire), 0.5 to 1.5mm ² (two wires)	—
Terminal Style		Finger-safe type ^{Note 5}	—

-  1. Class A for AS-Interface communication module.
- 2. 8kV (air discharge), 4kV (contact discharge) for AS-Interface communication module.
- 3. 1kV (criteria A), 2kV (criteria B) for AS-Interface communication module.
- 4. For protection against surge noise on DC power supply types (FL1E-H12RCE/B12RCE, FL1E-H12SND, FL1E-H12RCA/B12RCA), use surge absorbers, noise cut transformers, or noise filters. Use of surge protection device (DEHN + SOHNE GmbH + Co. VVT AD 24 Part No. 918 402) is recommended.
- 5. Tightening torque 0.4 to 0.5 N·m.

Text Display


Part Number	FL1E-RD1		
Keyboard Display			
Membrane keypad with 10 keys, FSTN-Graphic Display with 128 x 64 (columns x rows), LED backlight			
Power Supply	Input Voltage	24V AC/DC, 12V DC	
	Allowable Voltage Range	20.4 to 26.4V AC, 10.2 to 28.8V DC	
	Rated Frequency	47 to 63Hz	
	Current Draw	30 to 55mA (24V DC)	
	Power Consumption	12V DC	65mA
		24V DC	40mA
24V AC		90mA	
Data Transmission Rate	19200 baud		
LCD Display	Backlight lifetime ^{Note 1}	20,000 hours	
	Display lifetime ^{Note 2}	50,000 hours	
Weight	220g		

 Connect the text display and the base module using the text display cable (2.5m). The text display cable can be extended up to 10m using an extension cable (D-sub 9-pin).
 1. Backlight durability is the number of hours it takes for the light to become 50% of the original brightness.
 2. Display durability is calculated under ordinary operating and storage conditions: room temperature, normal humidity below 65% RH, and not subjected to direct sunlight.




Dimensions (mm)


Base Module

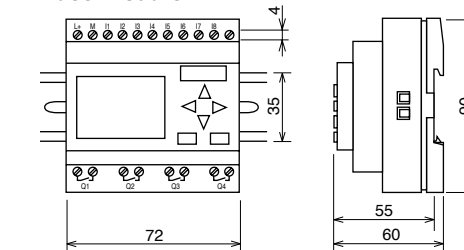


Expansion I/O Module, Communication Module

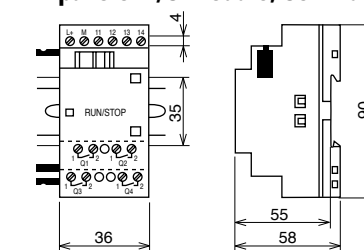


Mounting Hole Layout (Using Mounting Slides)

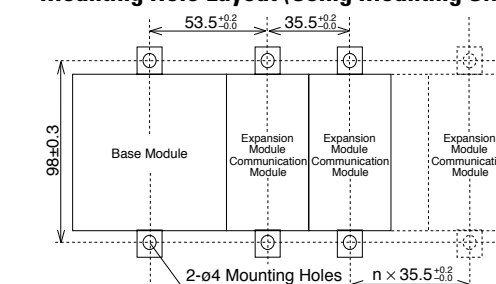


Text Display

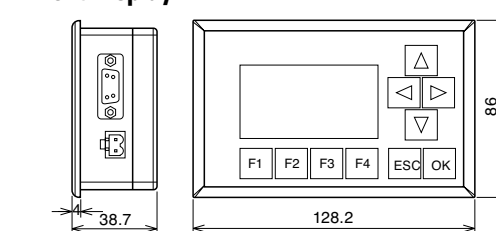

Installation

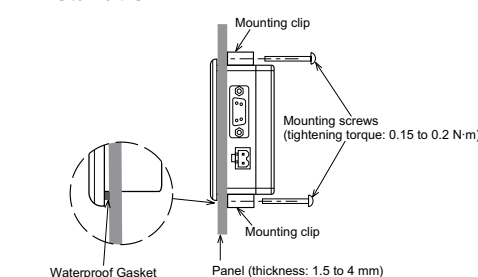


Mounting Hole Layout


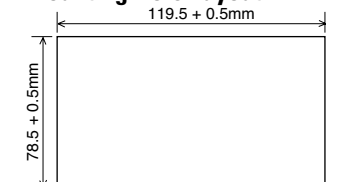


Function Blocks

General

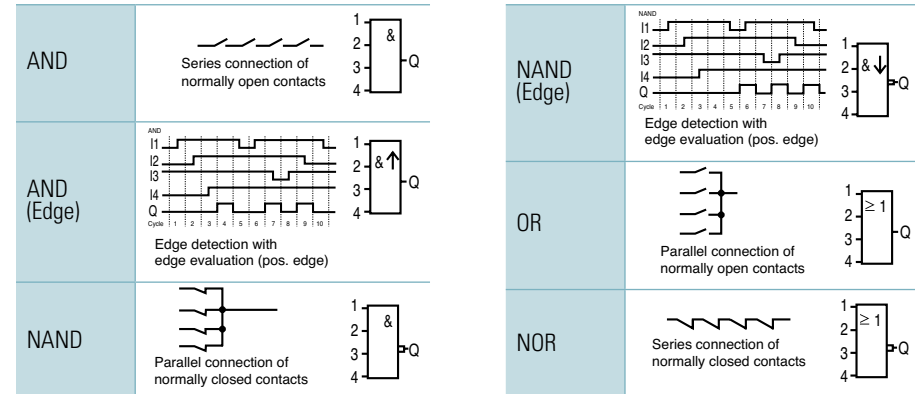


Special

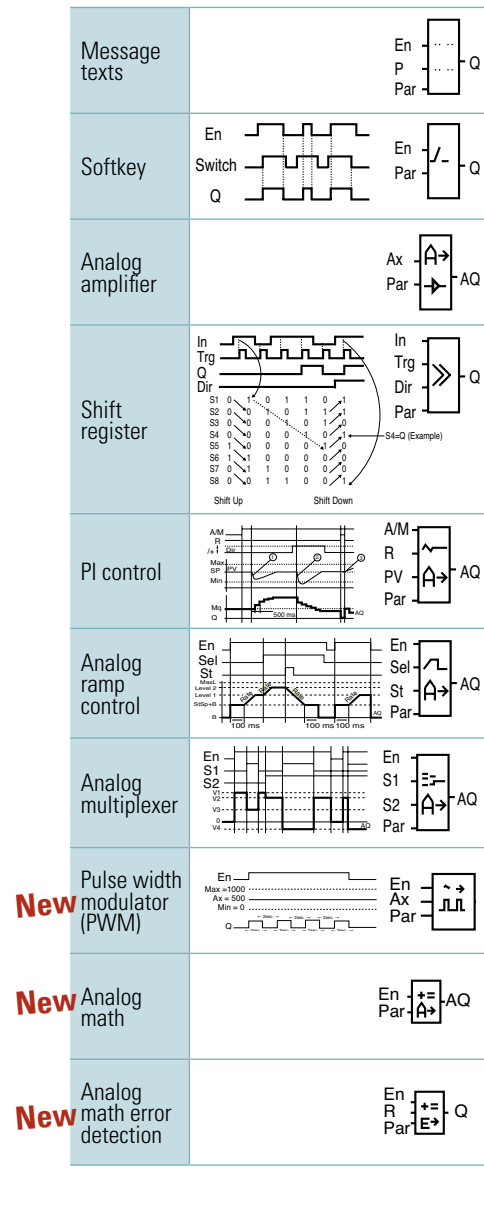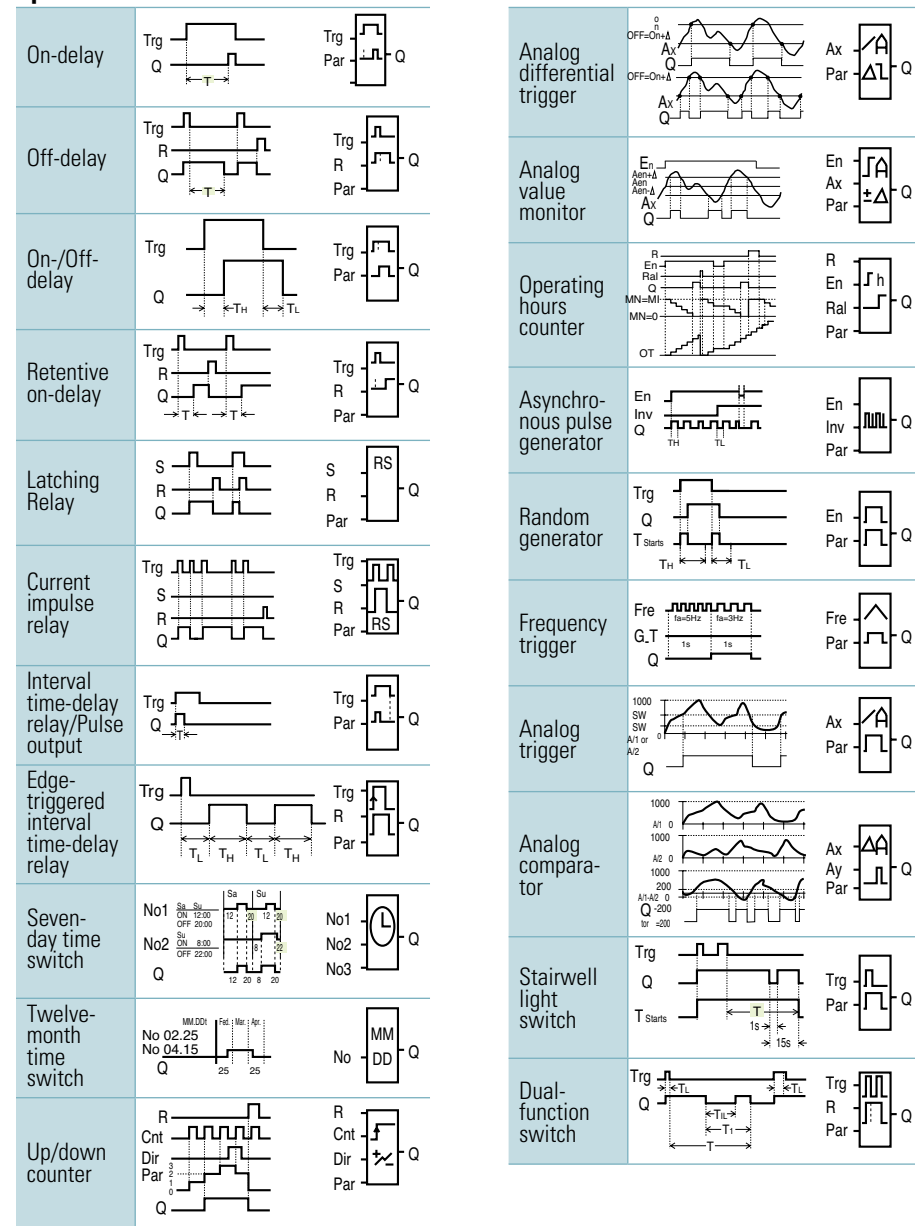

FL1E IDEC SmartRelay

Features

- **New** Remote text display panel
- **New** Extended retentive data memory
- **New** Arithmetic functions
- **New** Controllable backlit LCD display
- **New** 4 built-in 5kHz fast inputs
- **New** 4 built-in analog inputs
- **New** 3 memory cartridges
- **New** USB programming cable
- **New** Brighter & higher LCD contrast
- **New** 50% more memory
- EEPROM memory
- Password protection
- Universal voltages
- DIN rail or surface mountable
- Max. 50 message blocks



Specifications

Base Modules

Base Module Part Number	with LCD Display	FL1E-H12SND	FL1E-H12RCE	FL1E-H12RCA	FL1E-H12RCC	
	without Display	FL1E-B12RCE	FL1E-B12RCA	FL1E-B12RCC		
Power Supply	Rated Power Voltage	24V DC	12/24V DC	24V AC/DC	100 to 240V AC/DC	
	Allowable Voltage Range	20.4 to 28.8V DC	10.8 to 28.8V DC	20.4 to 26.4V AC, 20.4 to 28.8V DC	85 to 265V AC, 100 to 253V DC	
	Rated Frequency	—	—	47 to 63Hz	47 to 63Hz	
	Current Draw	40 to 75mA (24V DC)	60 to 175mA (12V DC) 40 to 100mA (24V DC)	76 to 182mA (24V AC) 40 to 100mA (24V DC)	25 to 40mA (100V AC), 20 to 30mA (240V AC) 10 to 25mA (100V DC), 6 to 15mA (240V DC)	
	Allowable Momentary Power Interruption	—	2ms (Typ.) (12V DC) 5ms (Typ.) (24V DC)	5ms (Typ.) (24V AC/DC)	10ms (Typ.) (100V AC/DC) 20ms (Typ.) (240V AC/DC)	
	Power Consumption	0.7 to 1.3W (24V DC)	0.3 to 1.7W (12V DC) 0.4 to 1.8W (24V DC)	0.9 to 2.7VA (24V AC) 0.4 to 1.8W (24V DC)	1.1 to 4.6VA (100V AC), 2.4 to 6.0VA (240V AC) 0.5 to 2.9W (100V DC), 1.2 to 3.6W (240V DC)	
	Reverse Polarity Protection	Yes	Yes	—	—	
	Clock	Backup Duration	—	80 hours (25°C) ^{Note 1}	80 hours (25°C) ^{Note 1}	80 hours (25°C) ^{Note 1}
		Clock Accuracy	—	±2 sec/day maximum	±2 sec/day maximum	±2 sec/day maximum
	Input	Input Signal	DC		AC/DC	AC/DC
Input Points		8 (I1 to I8)		8 (I1 to I8)	8 (I1 to I8)	
Analog Input Points		4 (I3, I4, I5, I6)		—	—	
High-speed Input ^{Note 2}		4 (I3, I4, I5, I6), 5KHz maximum		—	—	
Analog		Input Range	0 to 10V DC (max. rated input: 28.8V DC)		—	—
		Input Error	±1.5 (of full scale)		—	—
		Input Resolution	10 bits (0 to 1000)		—	—
		Allowable Voltage Range	0 to 28.8V DC		—	—
Input Impedance		Digital Input	3.5kΩ		4.8kΩ	840kΩ
		Analog Input	72kΩ		—	—
Isolation	—	—	—	—		
Operating Range	OFF Voltage	< 5V DC		< 5V AC/DC	< 40V AC, < 30V DC	
	ON Voltage	≥ 12V DC		≥ 12V AC/DC	≥ 79V AC, ≥ 79V DC	
	OFF Current	< 0.85mA (I1 to I6), < 0.05mA (I1, I2, I7, I8)		< 1.0mA	< 0.03mA	
Turn ON Time	ON Current	≥ 2mA (I3 to I6) ≥ 0.15mA (I1, I2, I7, I8)	≥ 1.5mA (I3 to I6) ≥ 0.1mA (I1, I2, I7, I8)	≥ 2.5mA	≥ 0.08mA, 100V AC: 50ms (Typ.)	
	Turn ON Time	1.5ms (Typ.) ≤ 1.0ms (I3, I6)		1.5ms (Typ.)	100V AC: 50ms (Typ.), 240V AC: 30ms (Typ.) 100V DC: 25ms (Typ.) 240V DC: 15ms (Typ.)	
Turn OFF Time	1.5ms (Typ.) ≤ 1.0ms (I3, I6)		15ms (Typ.)	100V AC: 65ms (Typ.), 240V AC: 105ms (Typ.) 100V DC: 95ms (Typ.), 240V DC: 125ms (Typ.)		
Wire Length	100m ^{Note 3}		100m ^{Note 3}	100m		



1. Two year backup duration (typ.) when battery cartridge or memory/battery cartridge used.

2. When selecting frequency trigger function and up/down counter function.
3. 10m when connected to analog input (twisted pair cable).

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Idec manufacturer:

Other Similar products are found below :

[LT7A-XE-G](#) [LT7A-XE-R](#) [LT7B-A250](#) [LT7B-A250FB](#) [LW6L-M1C24MG](#) [FB1T-000Z](#) [FB1W-HW1B-V411R-EMO-2](#) [FB1W-XW1E-BV411MR](#) [FB1W-XW1E-BV413MR](#) [FB3W-413Z](#) [FC2A-KP1C](#) [FC4A-J8AT1](#) [FC4A-T16S3](#) [FC5A-C16R2C](#) [MM-SMART-24](#) [MM-SMART-40](#) [FT1A-C12RA-S](#) [FT1A-C12RA-W](#) [FT1A-C14SA-B](#) [PF3S-BP12](#) [PS3X-D24AFG](#) [PS3X-Q12AFG](#) [GT3A-3AD24](#) [GT3F-2EAD24](#) [GT3S-2AF20](#) [GT3W-A16AD24](#) [GT3W-A33AF20N](#) [ABD302N-R](#) [ABD410N-R](#) [ABFD411N-G](#) [ABN4F11-G](#) [HE2B-M211PB](#) [HE2G-21SH](#) [HE9Z-D3B](#) [HG9Z-2A1](#) [HG9Z-XC300](#) [ACSNO-6123-FB-C6002](#) [RH3V2-UAC240V](#) [DFAN-031-B](#) [AL6M-LK1-G](#) [AL6M-P3-R](#) [AL6Q-M13-W](#) [AL6Q-M23P-QG](#) [ALFD29901DN-G-24V](#) [ALFN22211DNG-U](#) [ALFW224611D-W](#) [ALNE8811-G](#) [ALQW2B24611D-G](#) [ALW212611-G](#) [ALW22211DG](#)