


Subminiature Power Relay ETS



- Slim size (width 5mm)
- High breakdown voltage 4kV (between coil and contacts)
- Surge voltage up to 6kV (between coil and contacts)
- Clearance/creepage distance: 8mm
- High sensitive: 170mW
- 1 Form A and 1 Form C configurations

Options and ordering codes

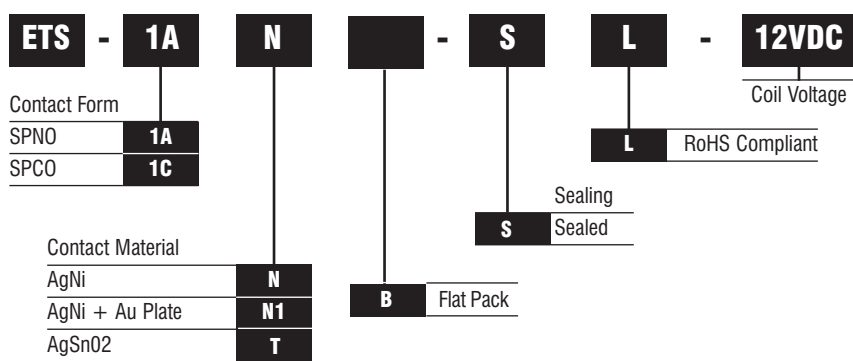

Contact Data

Contact arrangement	1A, 1C
Initial contact resistance Max.	100mΩ (at 1A 6VDC) Gold plated: 30mΩ (at 1A 6VDC)
Contact material	AgNi
Contact Rating (Res. load)	6A 250VAC / 30VDC
Max. switching voltage	400VAC / 125VDC
Max. switching current	6A
Max. switching power	1500VA / 180W
Mechanical Life	1x10 ⁷ ops
Electrical Life	NO / NC: 1x10 ⁴ ops (at 85°C)

Characteristics

Initial Insulation Resistance	1000MΩ @ 500VDC	
Dielectric Strength	Between coil & contact	4000VAC 1min.
	Between open contacts	1000VAC 1min.
Operate time (at nomi. Volt)	Max. 8ms	
Release time (at nomi. Volt)	Max. 4ms	
Shock Resistance	Functional	50m/s ²
	Destructive	1000m/s ²
Vibration Resistance	10 to 55Hz 1mm DA	
Humidity	5 to 85% RH	
Ambient Temp	-40°C to +85°C	
Termination	PCB	
Unit Weight	5.4g	
Construction	Sealed IP67, Flux proof	

Coil

Coil power	5 to 24VDC: 170mW 48VDC, 60VDC: 210mW
------------	--

Coil Data

Coil Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max allowable voltage (VDC 85°C)	Coil Resistance Ω ± 10%
5	3.75	0.25	7.5	147±10%
6	4.50	0.30	9.0	212±10%
9	6.75	0.45	13.5	476±10%
12	9.00	0.60	18	848±10%
18	13.5	0.90	27	1906±15%
24	18.0	1.20	36	3390±15%
48	36.0	2.40	72	10600±15%
60	45.0	3.00	90	16600±15%

Notes: 1) When require pick-up voltage=70% nominal voltage, special order allowed
2) When install 1 Form C type of ETS, please do not make the relay side with 5mm width down



Safety Approval Ratings

UL & CUR	6A 30VDC Resistive: 6A 277VAC Pilot duty: R300
----------	--


Subminiature Power Relay ETS continued



Outline dimensions (mm) Wiring diagram and PC Board layout

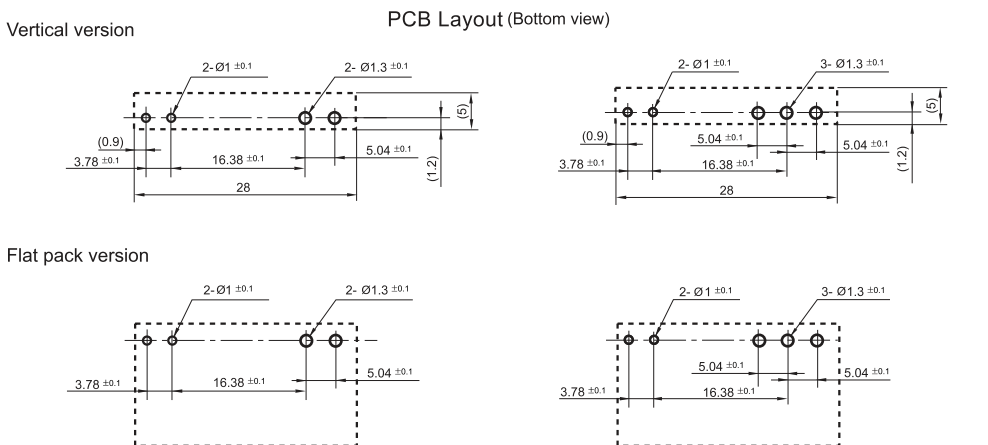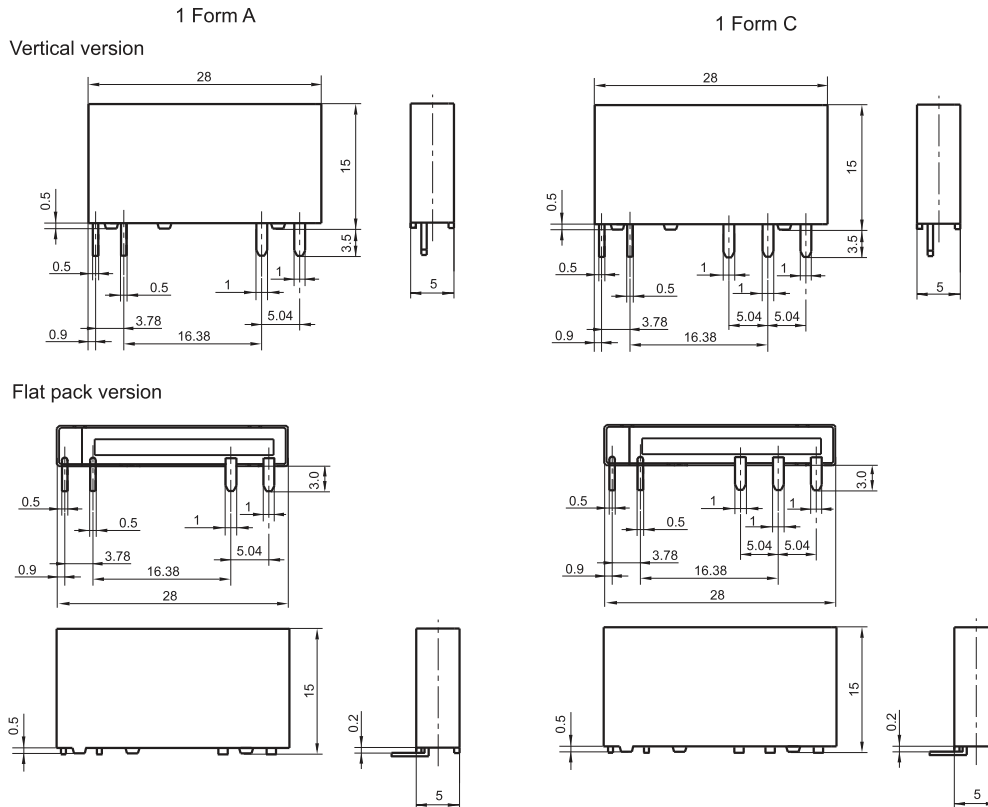

Characteristic Curve

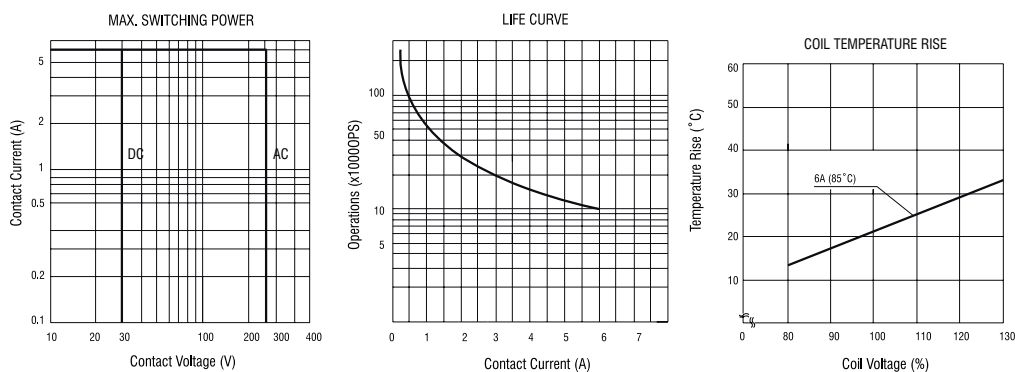

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays category](#):

Click to view products by [IMO manufacturer](#):

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)