

## Latching Relays Designed for Memory and Signaling Circuits

- Low changes in characteristics such as contact tracking and contact pressure for high durable.
- Excellent resistance to vibration and shock.
- Built-in operation indicators for simple operation verification.
- Same external shape with the MK Power Relays.



Refer to the *Common Relay Precautions*.

## Ordering Information

### List of Models

#### Encased Models and Models with Plug-in Terminals

Classification	Number of poles	2 poles	
	Model	Rated voltage (V)	
Standard models	MK2KP	6, 12, 24, 50, 100/(110), or 200/(220) VAC	

Classification	Number of poles	2 poles	
	Model	Rated voltage (V)	
Standard models	MK2KP	6, 12, 24, 48, 100, or 110 VDC	

## Ratings and Specifications

### Ratings

#### Operating Coil

Rated voltage (V)	Item	Set coil		Reset coil		Set voltage (V)	Reset voltage (V)	Maximum voltage (V)	Power consumption (W, VA)	
		Rated current (mA)	Resistance (Ω)	Rated current (mA)	Resistance (Ω)				Set coil	Reset coil
AC	6	286	4.8	29.0	78	80% max.	80% max.	110%	Approx. 1.5 to 2	Approx. 0.1 to 0.7
	12	128	25	14.4	325					
	24	66	105	10.8	965					
	50	31	440	3.2	8,450					
	100/(110)	17.8	1,670	3.6	13,350					
200/(220)	9.8	6,200	3.2	27,350						
DC	6	390	13	92.5	64	80% max.	80% max.	110%	Approx. 2.3 to 2.7	Approx. 0.5 to 1.2
	12	205	52	50	240					
	24	110	210	22.8	1,050					
	48	48.5	990	23.4	2,050					
	100	24	4,160	10.3	9,740					
110	26.4	4,160	11.3	9,740						

- Note:**
1. The rated current for AC is the value measured with a DC ammeter in 60 Hz half-wave rectification. The 100/(110) and 200/(220) VAC rated voltages are the values at 100 and 200 VAC.
  2. The rated current and coil resistance are measured at a coil temperature of 23°C with tolerances of +15%/-20% for the AC rated current and ±15% for the DC coil resistance.
  3. The AC coil resistance is a reference value only.
  4. Operating characteristics were measured at a coil temperature of 23°C.
  5. The maximum allowable voltage is the maximum value of the allowable voltage fluctuation range for the Relay coil operating power supply and was measured at an ambient temperature of 23°C. There is no continuous allowance.
  6. The initial reverse voltage of the built-in diode is 1,000 V. The initial reverse voltage of the built-in diode in some models is 2,000 V. (MK2KPD)

#### Contact Ratings

Item	Load	Resistive load	Inductive load (cos φ = 0.4, L/R = 7 ms)
Contact structure		Single	
Contact materials		Ag	
Rated load		5 A at 220 VAC, 3 A at 24 VDC	2 A at 220 VAC, 2.5 A at 24 VDC
Rated carry current		5 A	
Maximum contact voltage		250 VAC, 250 VDC	
Maximum contact current		5 A	
Maximum switching capacity (reference value)		1,100 VA, 72 W	440 VA, 60W

### Characteristics


Contact resistance*1		50 mΩ max.	
	Set	Time	30 ms max. (when rated operating power is applied, not including contact bounce.)
		Minimum pulse width	60 ms
Reset	Time	30 ms max. (when rated operating power is applied, not including contact bounce.)	
	Minimum pulse width	60 ms	
Maximum operating frequency	Mechanical	1,800 operations/hr	
	Rated load	1,800 operations/hr	
Insulation resistance		100 MΩ min. for 500 VDC applied to the same location as for dielectric strength measurement	
Dielectric strength	Between coil and contacts	2,000 VAC at 50/60 Hz for 1 min.	
	Between contacts of different polarity		
	Between contacts of the same polarity	1,000 VAC at 50/60 Hz for 1 min.	
	Between set/reset coils		
Vibration resistance	Destruction	10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude)	
	Malfunction	10 to 55 to 10 Hz, 0.5-mm single amplitude (1.0-mm double amplitude)	
Shock resistance	Destruction	500 m/s <sup>2</sup>	
	Malfunction	100m/s <sup>2</sup>	
Endurance	Mechanical	5,000,000 operations min. (operating frequency: 1,800 operations/hr)	
	Electrical*2	500,000 operations min. (rated load, switching frequency: 1,800 operations/h)	
Failure rate P value (reference value*3)		10 mA at 1 VDC	
Weight		Approx. 85 g	

- Note:** The above values are initial values.
- \*1. Measurement conditions: 1 A at 5 VDC using the voltage drop method
  - \*2. Ambient temperature condition: 23°C
  - \*3. This value was measured at a switching frequency of 60 operations per minute.


Ambient operating temperature	-10 to 40°C (with no icing or condensation)
Ambient operating humidity	5% to 85%

# Engineering Data


## Maximum Switching Capacity

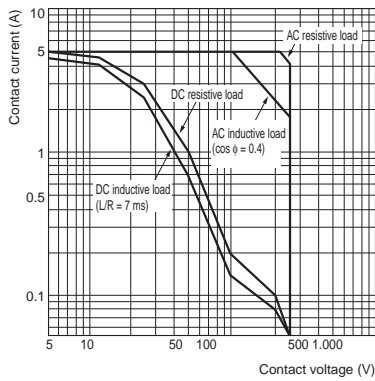

## Endurance Curve

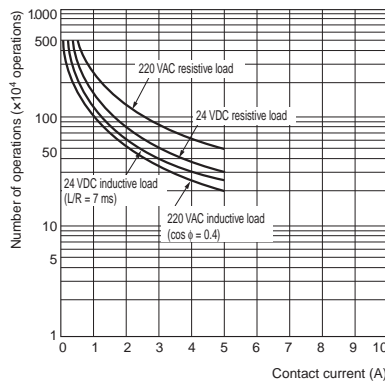


## Malfunctioning Shock MK2KP 24 VDC

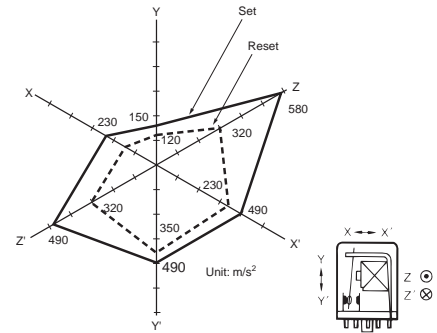


## Ambient Temperature and the Set and Reset Voltages

### MK2KP 100/(110) VAC

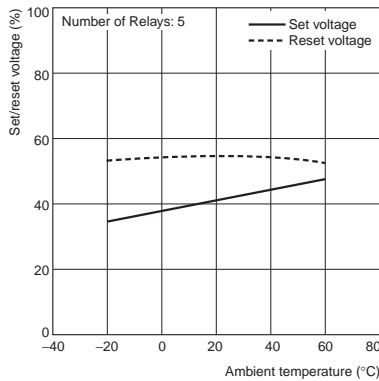

### MK2KP 24 VDC

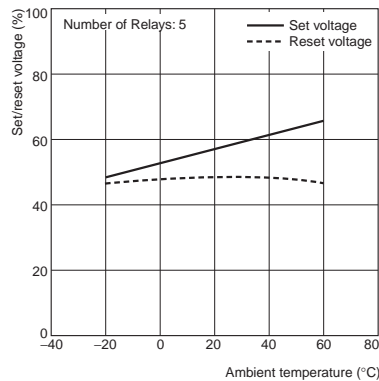


Measurement: Measurement: Shock was applied 3 times each in 6 directions along 3 axes with the Relay set and reset to check the shock values that cause the Relay to malfunction.


Criteria: 100m/s<sup>2</sup>

## Ambient Temperature vs. Coil Temperature Rise

### MK2KP 100/(110) VAC

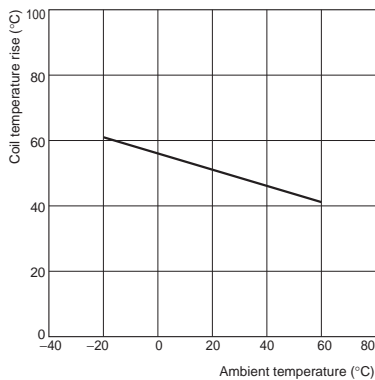


### MK2KP 24 VDC

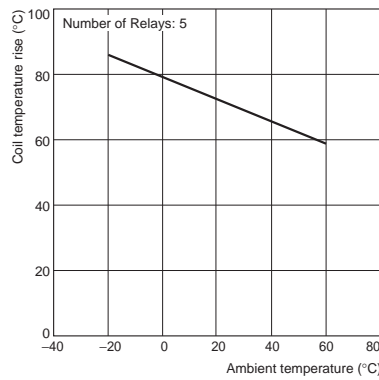


## Changes in Operation Characteristics Due to External Magnetic Fields

### MK2KP 100 VAC (Average Value)

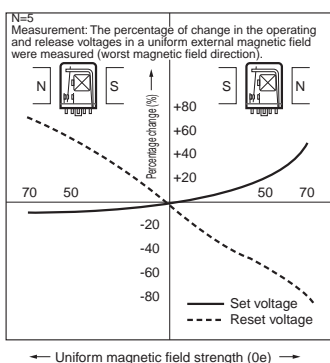

## Degradation in Latching Ability Over Time




### MK2KP 200 VAC

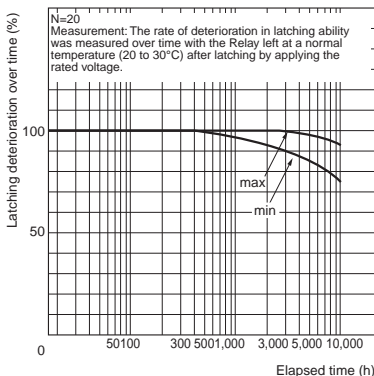


# Dimensions

## List of Models

### MK2KP



### Terminal Arrangement/Internal Connections (Bottom View)



- Note:**
1. R is a resistor for ampere-turn correction. This resistor is included in models for 50 VAC or 48 VDC or higher.
  2. For DC models, check the coil polarity for both the set and reset coils and wire all connections correctly. If the connections are not correct, unintended operation may occur.
  3. For AC models, the set and reset coils have no coil polarity.

## Connection Sockets (Refer to *Common Socket and DIN Track Products* for external dimensions.)

Front-mounting Sockets	Back-mounting Sockets			
	Track or screw mounting	Solder terminals	Wrapping terminals	Relays with PCB Terminals
PF113A(-E)	PL11	PL11-Q	PLE11-0	

**Note:** Details about the Relay Hold-down Clips are the same as for the standard MK Relays.  
Refer to *Common Sockets and DIN Tracks*.

## Mounting Height with Sockets

The mounting height is the same as the MK. Refer to the information on the MK for details.

## Safety Precautions

Refer to the *Common Relay Precautions* for precautions that apply to all Relays.

### Precautions for Correct Use

#### Circuit Conditions

- Do not apply a voltage to the set and reset coils at the same time. If you apply a voltage to both coils simultaneously, the Relay will be set.
- There is usually no reason to use a Latching Relay with a constant current flow because the Relay can be latched with a single pulse. Using only a single pulse is also beneficial to reduce power consumption.

#### Minimum Pulse Width

- The minimum pulse width in the performance column is the value for the following measurement conditions: an ambient temperature of 23°C with the rated operating voltage applied to the coil. The performance values given here may not be satisfied due to use over time and a reduction in latching performance due to changes in the ambient temperature or in the conditions of the application circuit.  
For actual use, apply the rated operating voltage with a pulse width based on the actual load and reset the Relay at least once per year to prevent degradation over time.
- If the Relay is used in an environment with strong magnetic fields, the surrounding magnetic field can demagnetize the magnetic body and cause unintended operation.  
Therefore, do not use these Relays in environments with strong magnetic fields.

## Terms and Conditions Agreement

### Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

### Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

### Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

### Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

### Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

### Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

### Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

### Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

2013.6

In the interest of product improvement, specifications are subject to change without notice.

**OMRON Corporation**  
Industrial Automation Company

<http://www.ia.omron.com/>

(c)Copyright OMRON Corporation 2013 All Right Reserved.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [omron](#) manufacturer:*

Other Similar products are found below :

[44532-2050](#) [XF2W-2415-1A](#) [LY1D-2-5S-AC120](#) [CS1G-CPU43-E](#) [M22CAT1](#) [61F-GP-NT AC110](#) [M7E-01DGN2-B](#) [M7E-02DGN2](#) [M7E-08DRN2](#) [M7E-20DRN1](#) [M7E-HRN2](#) [D2HW-C233MR](#) [F03-02 SUS316](#) [F3SJ-A0245P30](#) [F3STGRNSMC21M1J8](#) [F3UVHM](#) [MG2-US-AC24](#) [MK2EP-UA-AC6V](#) [MK2PNIAC240](#) [MK310E-DC24](#) [MKS2XTIN-11 DC110](#) [MM4KPAC120NC](#) [MM4XPAC120](#) [G2Q-184P-V-DC5](#) [G2R-1114P-V-US-DC5](#) [G2R13SNDDC24](#) [G2RL-2A4-CF-DC48](#) [G2U-114P-US-DC12](#) [G2V-234P-US-DC48](#) [G3CA-8H-AC100/110/120](#) [G3PA-210B-US-DC24](#) [G3PE525B3NDC1224](#) [G3SD-Z01P-PD-US DC24](#) [G3TA-ODX02S DC24](#) [G4A-1A-P-DC24](#) [G4Q-212S](#) [G4S-112P-US-B-DC24](#) [G5C14DC12](#) [G5E-C-H-DC12](#) [G5E-V-DC12](#) [G6J-2FS-Y-DC12](#) [G6L-1P-DC3](#) [G6N-2-Y-DC3](#) [G6N-2-Y-DC9](#) [G6R-1-DC5](#) [G730ROC16BDC24](#) [G8J1C7TMFRDC12](#) [G9SA-300-SC DC24](#) [G9SB3012CACDC24](#) [G9SB-301-B](#)