



Features

- ✓ Available from Stock in Convenient 5-Packs
- ✓ PFA or Glass Braid Insulation
- ✓ 20, 24, 30 and 36 AWG Wires
- ✓ Made from Special Limits of Error Wire
- ✓ 36 and 72 inch Lengths Standard
- ✓ NIST Calibration Available

Model No.	AWG Gage	Dia.	Insulation
5TC-GG-(*)-20-(**)	20	0.032"	Glass Braid
5TC-GG-(*)-24-(**)	24	0.020"	Glass Braid
5TC-GG-(*)-30-(**)	30	0.010"	Glass Braid
5TC-TT-(*)-20-(**)	20	0.032"	PFA
5TC-TT-(*)-24-(**)	24	0.020"	PFA
5TC-TT-(*)-30-(**)	30	0.010"	PFA
5TC-TT-(*)-36-(**)	36	0.005"	PFA

*Specify calibration: J, K, T or E



**Specify length: 36 or 72 inches

Calibrations			
J =	K =	T =	E =
Iron-Constantan	CHROMEGA®-ALOMEGA®	Copper-Constantan	CHROMEGA®-Constantan

PFA insulation



Glass Braid insulation

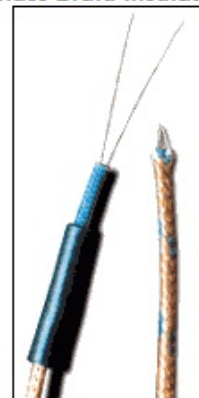

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [newport manufacturer](#):

Other Similar products are found below :

[BDS1](#) [BDT1](#) [WTK-14-36/N](#) [5TC-TT-J-24-72](#) [TXDIN70](#) [OTP-U-F](#) [5SC-TT-K-30-36](#) [WTK-8-24/N](#) [TPJ-U-F](#) [OTP-U-M](#) [5TC-TT-J-24-50/N](#)
[5SC-TT-T-30-72](#) [SMTC-AL-P](#) [SMPW-CC-T-M](#) [MPJ-K-F-ROHS](#)