

**Data Sheet**

<b>Type Number:</b>	55750	
<b>Sytem:</b>	Nickel Metal Hydride/ KOH Electrolyte	
<b>Nominal Voltage [V]:</b>	1.2	
<b>Nominal Capacity C [mAh]:</b>	500	
<b>Typical Capacity C [mAh]:</b>	510	
	at 100 mA / 1.00 V	
<b>Weight, approx. [g]</b>	14.0	
<b>Dimensions [mm]:</b>	<b>min.</b>	<b>max.</b>
<b>Length [l]:</b>	24.0	24.2
<b>Width Facing [w]:</b>	33.9	34.1
<b>Height [h]:</b>	6.3	6.5

<b>UL Recognition:</b>	MH13654	
<b>Coding:</b>	Manufacturing 5 digit code (123 = day/4 = year/ 5 = version)	

<b>Temperature Ranges [°C]</b>	<b>min.</b>	<b>max.</b>
<b>Storage:</b> less than 30 days	-40	85
<b>Discharge:</b>	-20	85
<b>Charge:</b>	0	85

<b>Charging Method:</b>	
<b>Normal Charging:</b>	50 mA for 14 – 16 h
<b>Accelerated Charging (20°C):</b>	150 mA for 4 h
	Time controlled, voltage control recommended
<b>Fast Charging (20°C):</b>	500 mA for h *
<b>Trickle Charging:</b>	5 - 15 mA

<b>Overcharge (20°C):</b>	15 mA continuous
	50 mA up to 1 year

<b>Charge Retention [%] at 20°C:</b>	80
	Capacity available after 1 month Storage at 20°C


<b>Internal Resistance [Ohm]:</b>	0.1
	at charged cells, 20°C, DC: 0.2 CA/2 CA, (IEC 61951-2)

<b>Impedance [Ohm]:</b>	0.015
	at charged cells, 20°C, AC: 1kHz, (IEC 61951-2)

<b>Typical Capacities [mAh]:</b>	
at 500 mA / 0.9 V	400
at 1500 mA / 0.9 V	200

<b>Max. Discharge Current (cont.) [mA]:</b>	1500
---	------

<b>Life Expectancy (typical):</b>	
<b>IEC Cycle:</b>	1000 Cycles (IEC 61951-2)
<b>Trickle Charge:</b>	up to 5 years (20°C)
<b>Trickle Charge:</b>	up to 3 years (45°C)

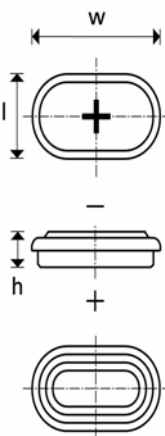

\* (-dv = 5-10 mv/ cell; dT/dt=0.7°C/min)

Capacities based on normal charging

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [varta](#) manufacturer:*

Other Similar products are found below :

[56456 702 099](#) [18750](#) [4114 210 501](#) [4610 726 406](#) [4122 210 511](#) [LCD-CHARGER + 4XAA 2400MAH](#) [449915B](#) [4607 726 406](#)  
[55171403014](#) [55625603059](#) [55615602940](#) [4112101411](#) [4 022 211 111](#) [4 106 101 436](#) [4 020 211 111](#) [MINI CHARGER + 2XAA 2100MAH](#)  
[MINI-CHARGER](#) [17730](#) [LCD-SMART-CHARGER](#) [414086X](#) [POCKET-CHARGER + 4XAA 2100MAH](#) [458980A](#) [LCD MULTI](#)  
[CHARGER](#) [CG511-150-PB](#) [EE UNIVERSAL CHARGER](#) [CG401D-050-PB](#) [CG511-050-PB](#) [CU303-018-PB](#) [413675G](#) [CG381D-G-100-PB](#)  
[CU202-030-PB](#) [55615603059](#) [CG381D-G-150-PB](#) [CG481G-050-PB](#) [CU303-030-PB](#) [CG511D-030-PB](#) [CA317-PB](#) [CG511D-100-PB](#)  
[CU201G-B-030-PB](#) [095668F](#) [4600 726 406](#) [CG511-030-PB](#) [CA418-PB](#) [CG481G-030-PB](#) [CG511D-150-PB](#) [CG381D-G-050-PB](#) [CU302-](#)  
[030-PB](#) [CG341-030-PB](#) [CU201G-B-050-PB](#) [CA089-PB](#)